



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION


High Pass Filter
50 Ω BNC
50 MHz 7th Order



Part Number: CHPFL-0050-BNC



Schematic

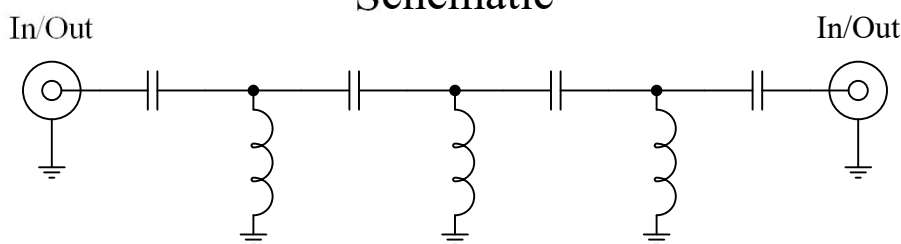

Features:


- 7th Order Chebyshev Response
- 50 Ω BNC Connectors

Applications:

- Test Equipment
- Lab Use

Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -45°C to 90°C
- 50 VDC

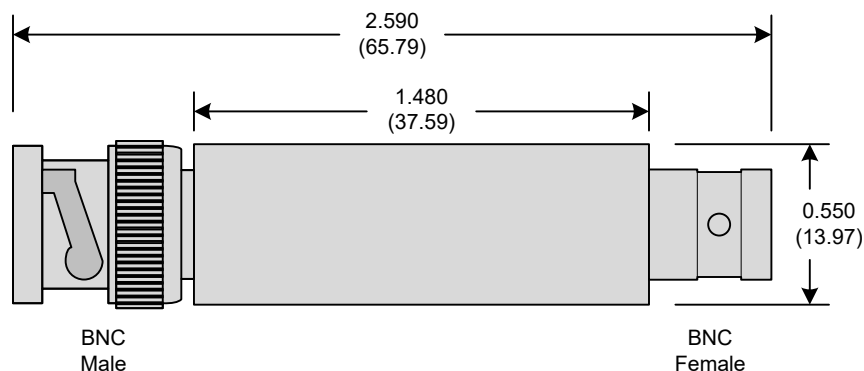

Crystek's new line of BNC High Pass Filters are designed in a rugged BNC housing. This filter line has excellent out-of-band rejection.

Designed for Test Equipment and General Lab Use.




Rev B

Page 1 of 3



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

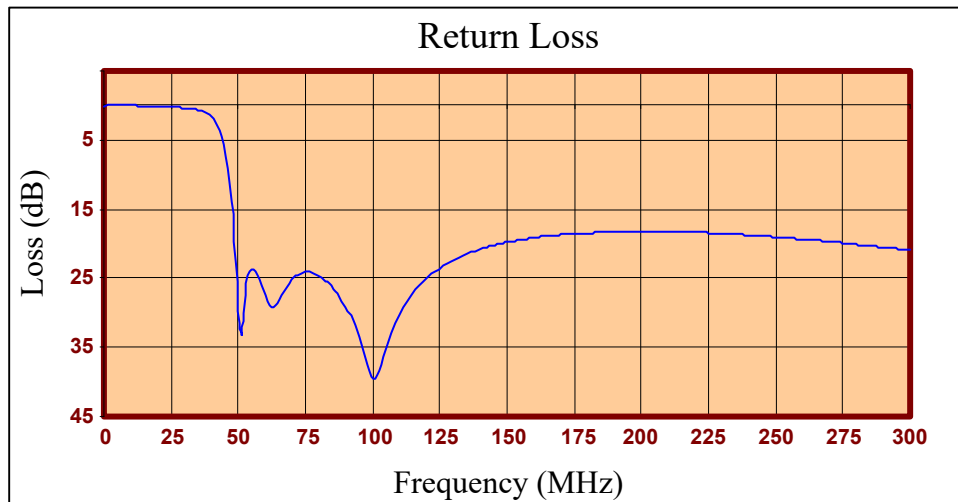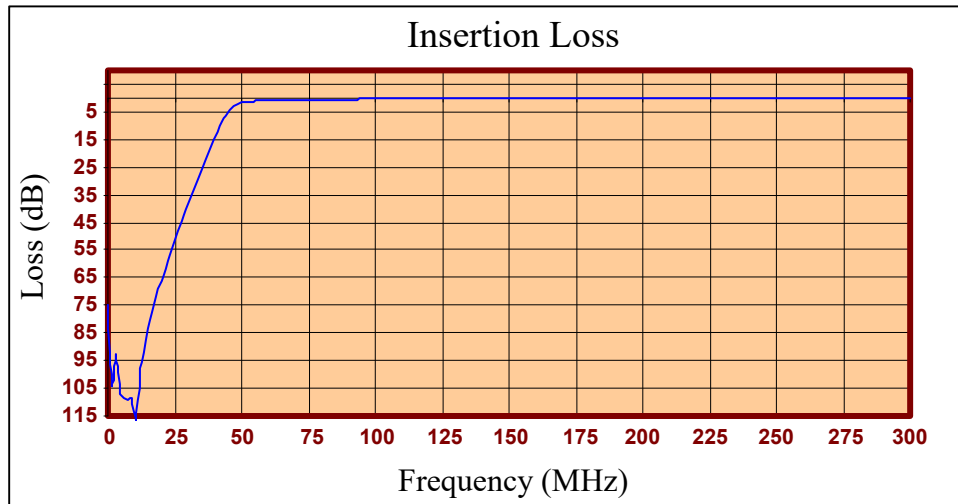



FREQ (MHz)	INSERTION LOSS (dB)	RETURN LOSS (dB)
0.300	74.43	0.04
1.799	103.96	0.01
3.297	92.76	0.00
4.796	106.98	0.00
6.294	108.49	0.01
7.793	108.95	0.01
9.291	108.49	0.02
10.790	116.15	0.02
12.288	100.72	0.03
13.787	92.24	0.05
15.285	83.39	0.06
16.784	77.57	0.07
18.282	71.86	0.09
21.279	61.63	0.14
22.778	57.02	0.17
24.276	52.62	0.20
25.775	48.42	0.24
27.273	44.40	0.29
28.772	40.50	0.34
30.270	36.71	0.41
31.769	33.01	0.48
33.267	29.38	0.58
36.264	22.28	0.87
37.763	18.79	1.10
39.261	15.35	1.45
42.258	8.91	2.96
43.757	6.23	4.60
57.243	1.05	24.62
63.237	0.83	29.25
78.222	0.56	24.29
100.700	0.37	39.49
105.195	0.35	34.52
120.180	0.30	24.94
135.165	0.28	21.49
168.132	0.26	18.81
225.075	0.22	18.43
273.027	0.18	19.85
300.000	0.17	20.92

Product Control:

Crystek Part Number:	CHPFL-0050-BNC	Release Date:	25-Jul-2017
Revision Level:	B	Responsible:	K. Piotrowicz

Rev B

Page 3 of 3



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CHPFL-0050-BNC](#)