




CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

RedBox VCO
CRBV55BE-0960-1200




PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			960	MHz
Upper Frequency:	1200			MHz
Tuning Voltage:	0.5		4.5	VDC
Supply Voltage:	2.85	3.0	3.15	VDC
Output Power:	0	+3.0	+6.0	dBm
Supply Current:		10		mA
Harmonic Suppression (2 nd Harmonic)		-10		dBc
Pushing:		1.0	3.0	MHz/V
Pulling, all Phases:		1.0	2.0	MHz pk-pk
Tuning Sensitivity:		150		MHz/V
Phase Noise @ 10kHz offset:		-95	-90	dBc/Hz
Phase Noise @ 100kHz offset:		-117	-110	dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			30	pF
Operating Temperature Range:	-40		+85	°C
Storage Temperature Range:	-45		+90	°C


FRONT

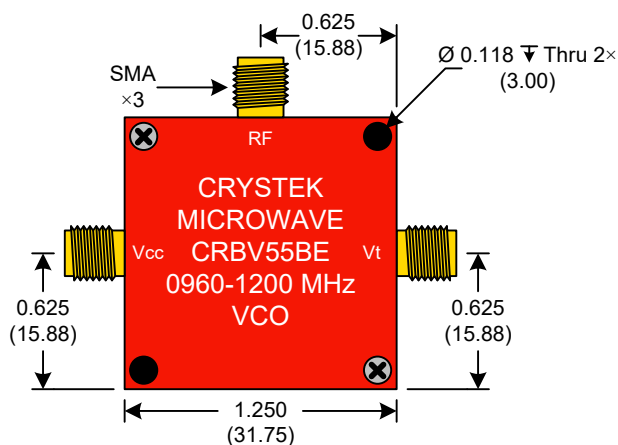

BACK

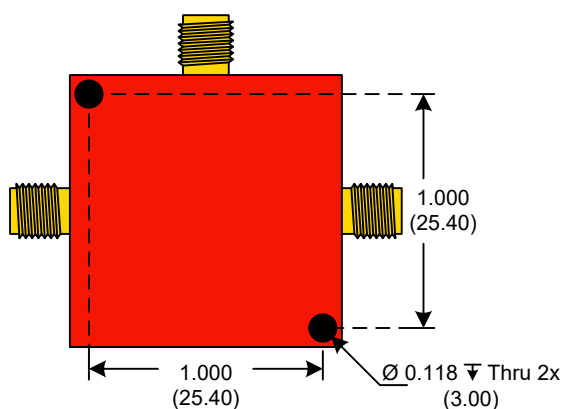

SIDE

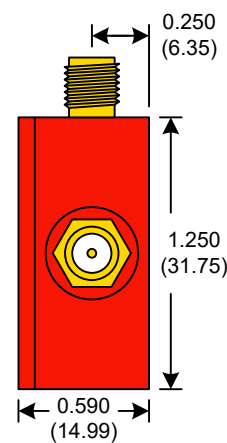

● Unless otherwise specified, Dimensions are in: $\frac{IN}{(mm)}$

Product Control:

Crystek Part Number:	CRBV55BE-0960-1200	Release Date:	10-Jan-2014
Revision Level:	D	Responsible:	C. Vales

Page 1 of 2



CRYSTEK
CORPORATION


12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM




CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

RedBox VCO
CRBV55BE-0960-1200

Phase Noise (1 Hz BW, Typical)

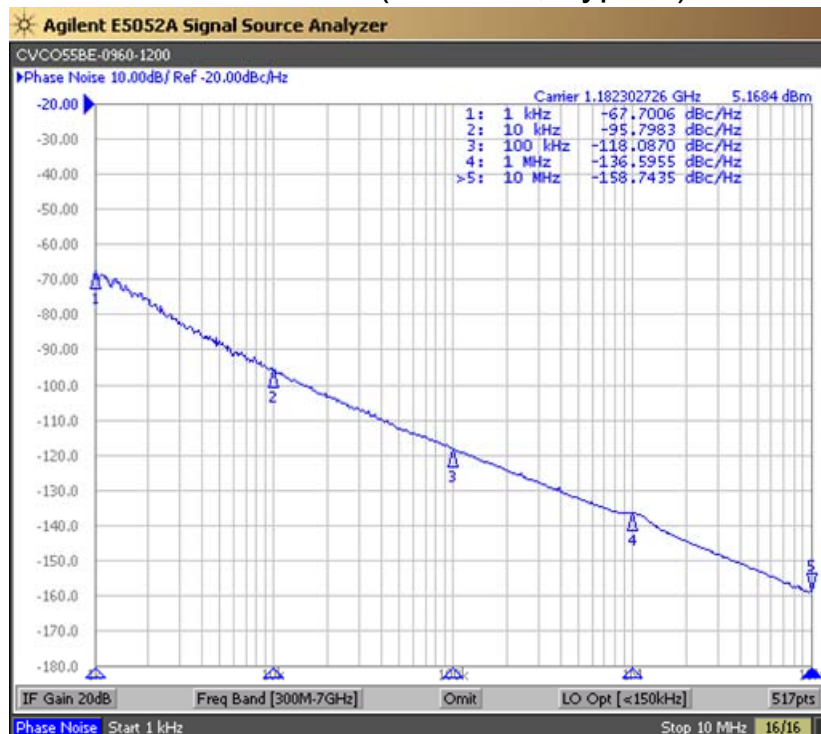

Tuning Curve (Typical)

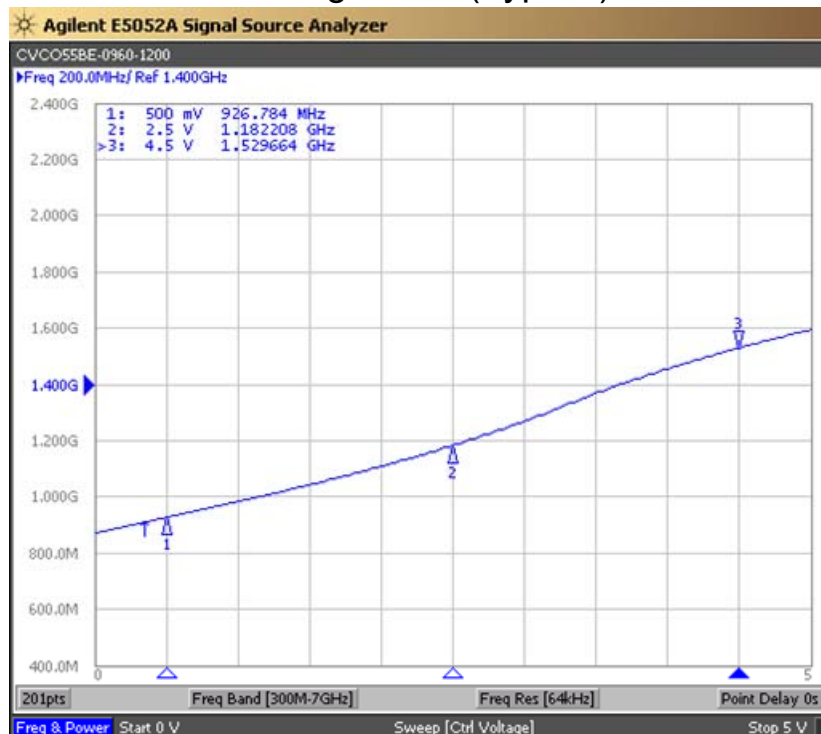

Product Control:

Crystek Part Number:	CRBV55BE-0960-1200	Release Date:	10-Jan-2014
Revision Level:	D	Responsible:	C. Vales

Specification is subject to change without notice



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Crystek:](#)

[CRBV55BE-0960-1200](#)