



PERFORMANCE SPECIFICATION	MIN	TYP	MAX	UNITS
Lower Frequency:			902	MHz
Upper Frequency:	928			MHz
Tuning Voltage:	0.5		3.5	VDC
Supply Voltage:	2.85	3.0	3.15	VDC
Output Power:	+2.0	+5.0	+8.0	dBm
Supply Current:			15	mA
Harmonic Suppression (2 nd Harmonic):		-10		dBc
Pushing:		0.5		MHz/V
Pulling, all Phases:		0.5		MHz pk-pk
Tuning Sensitivity:		30		MHz/V
Phase Noise @ 10kHz offset:		-108		dBc/Hz
Phase Noise @ 100kHz offset:		-128		dBc/Hz
Load Impedance:		50		Ω
Input Capacitance:			40	pF
Operating Temperature Range:	-25		+85	°C
Storage Temperature Range:	-45		+90	°C

Phase Noise (1 Hz BW, Typical)

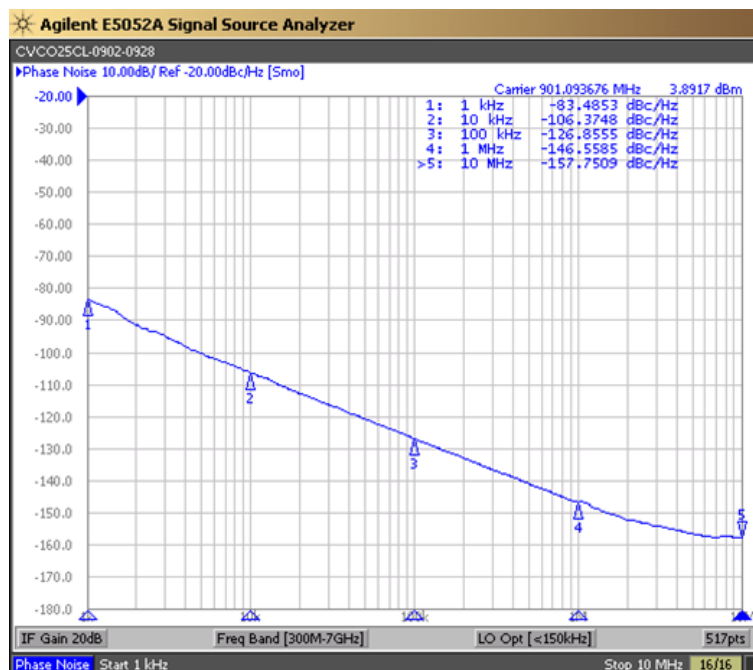


Tuning Curve (Typical)

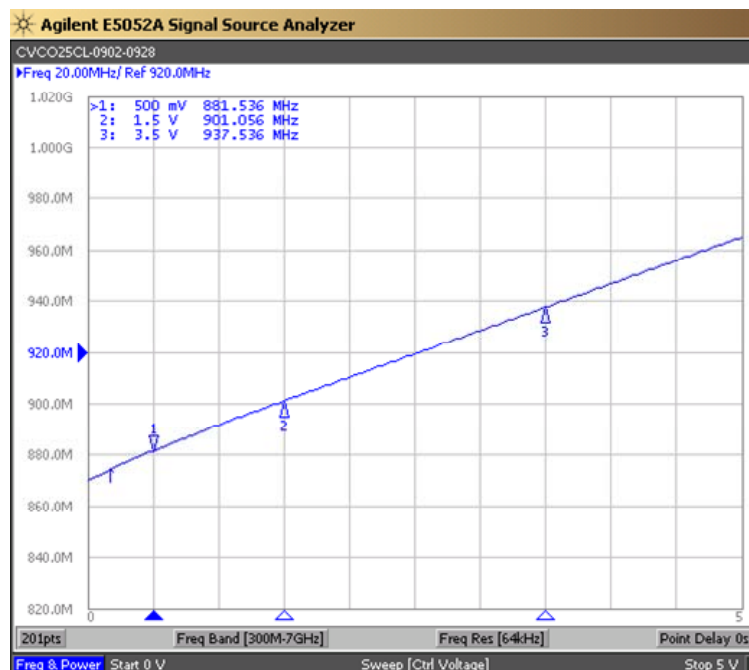

Product Control:

Crystek Part Number:	CVCO25CL-0902-0928	Release Date:	03-Apr-2017
Revision Level:	H	Responsible:	C. Vales






CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

Voltage Controlled Oscillator-VCO

CVCO25CL-0902-0928



BOTTOM VIEW

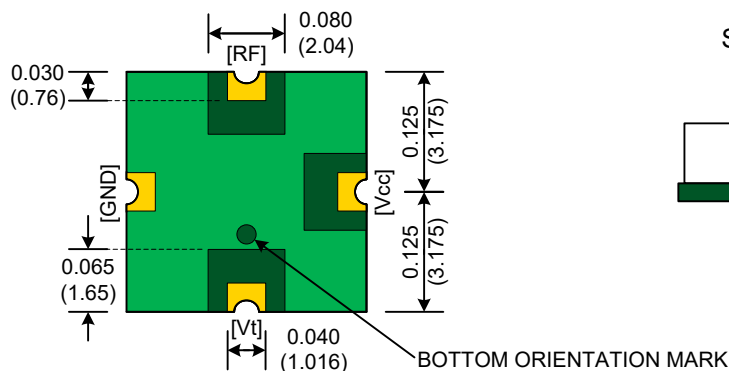

SIDE VIEW




TOP VIEW

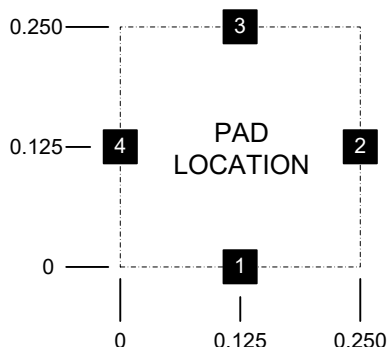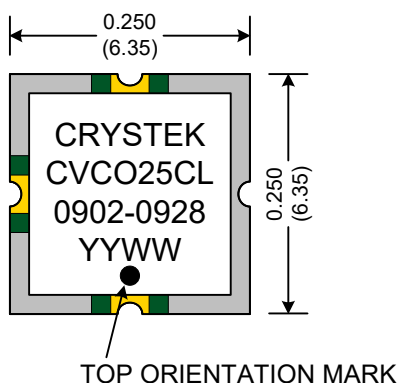

Pad	Connection
1	Vt
2	GROUND
3	RF-OUTPUT
4	Vcc

- Unless otherwise specified, Dimensions are in: IN (mm)
- Pad Location Dimensions are in: Inches

TAPE AND REEL

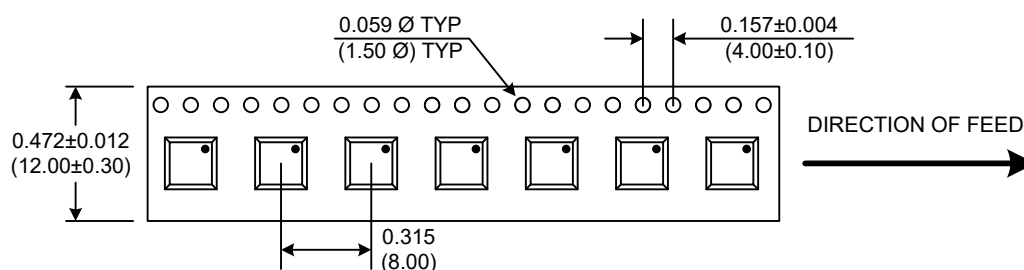

Drawing not to scale

Product Control:

Crystek Part Number:	CVCO25CL-0902-0928	Release Date:	03-Apr-2017
Revision Level:	H	Responsible:	C. Vales

Specification is subject to change without notice

Page 2 of 2



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Crystek:

[CVCO25CL-0902-0928](#)