

JCP Series



- 2:1 Input Range
- Single, Dual & Triple Outputs
- -40 °C to +100 °C Operating Temperature
- High Efficiency up to 92%
- Six-sided Metal Case
- Fixed 350 kHz Switching Frequency
- 3 Year Warranty

Input

Input Voltage Range	• 12 VDC (9-18 VDC) • 24 VDC (18-36 VDC) • 48 VDC (36-75 VDC)
Input Current	• See table
Input Filter	• Pi network
Undervoltage Lockout	• Turn on >71% nominal input • Turn off <67% nominal input

Output

Output Voltage	• See table
Output Voltage Trim	• ±10%
Minimum Load	• See table
Line Regulation	• ±0.5% max for single & dual output, • ±1.0% max for V1 of triple output, • ±3.0% for aux of triple output
Load Regulation	• ±0.5% max single ±1.0% dual output, • ±1.0% max for V1 of triple output, • ±4.0% for aux of triple output
Setpoint Accuracy	• ±1.5% max single and dual • ±1.5% max for V1, ±3.0% of triple output
Voltage Balance	• ±2.0% max
Ripple & Noise	• 2.5, 3.3 & 5.0 V models 50 mV pk-pk max • 12.0 & 15.0 V models 75 mV pk-pk max (20 MHz bandwidth)
Transient Response	• 5% max deviation, recovery to within 1% in 300 µs for a 25% load change
Temperature Coefficient	• ±0.02%/°C
Overvoltage Protection	• 2.5 V models 3.6 V typical, • 3.3 V models 3.9 V typical, • 5.0 V models 6.2 V typical, • 12.0 V models 15.0 V typical, • 15.0 V models 18.0 V typical
Overcurrent Protection	• 110-140%
Short Circuit Protection	• Continuous, trip & restart (Hiccup mode)
Remote On/Off	• ON >3.5 to 75 VDC or open circuit • OFF <1.8 VDC
Thermal Protection	• Shuts down when case temperature measures +110 °C typical
Remote Sense	• Compensates for up to 10% voltage drop single output models only

General

Efficiency	• See table
Isolation Voltage	• 1500 VDC Input to Output • 1500 VDC Input to Case • Output return connected to case
Switching Frequency	• 350 kHz typical
MTBF	• >600 kHrs to MIL-HDBK-217F, GB at 25 °C
Isolation Resistance	• 10⁹ Ω min

Environmental

Operating Temperature	• -40 °C to +100 °C, derate from 100% load at +60 °C to 0% load at +100 °C
Case Temperature	• +100 °C max
Storage Temperature	• -55 °C to +125 °C
Cooling	• Convection-cooled
Operating Humidity	• Up to 90%, non-condensing
Shock	• 30 g, half sine wave 18 ms pulse applied 3 times on each of 6 axes
Vibration	• 5-500 Hz, 3 g, for 10 mins on each of 3 axes

EMC & Safety

Emissions	• EN55022 Level A conducted & radiated with external components - contact technical sales
ESD Immunity	• EN61000-4-2, Level 2 Perf Criteria A
Radiated Immunity	• EN61000-4-3, 3 V/m Perf Criteria A
Conducted Immunity	• EN61000-4-6, 3 V rms Perf Criteria A

Input Voltage	Output Voltage	Output Current		Input Current ⁽²⁾		Efficiency	Model Number ⁽¹⁾
		Min	Max	No Load	Full Load		
9-18 V	2.5 V	0 A	10.00 A	200 mA	2367 mA	88%	JCP4012S2V5
	3.3 V	0 A	10.00 A	200 mA	3090 mA	89%	JCP4012S3V3
	5.0 V	0 A	8.80 A	200 mA	3745 mA	89%	JCP4012S05
	12.0 V	0 A	3.33 A	200 mA	3703 mA	90%	JCP4012S12
	15.0 V	0 A	2.66 A	200 mA	3702 mA	90%	JCP4012S15
	±12.0 V	±0.09 A	±1.80 A	100 mA	4045 mA	89%	JCP4012D12
	±15.0 V	±0.07 A	±1.40 A	100 mA	3889 mA	90%	JCP4012D15
	3.3 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	200 mA	2784 mA	88%	JCP4012T0312
	3.3 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	200 mA	2727 mA	88%	JCP4012T0315
	5.0 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	200 mA	3750 mA	88%	JCP4012T0512
18-36 V	2.5 V	0 A	10.00 A	100 mA	1184 mA	88%	JCP4024S2V5
	3.3 V	0 A	10.00 A	100 mA	1545 mA	89%	JCP4024S3V3
	5.0 V	0 A	8.80 A	110 mA	1831 mA	91%	JCP4024S05
	12.0 V	0 A	3.33 A	100 mA	1811 mA	92%	JCP4024S12
	15.0 V	0 A	2.66 A	100 mA	1810 mA	92%	JCP4024S15
	±12.0 V	±0.09 A	±1.80 A	100 mA	1978 mA	91%	JCP4024D12
	±15.0 V	±0.07 A	±1.40 A	100 mA	1902 mA	92%	JCP4024D15
	3.3 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	100 mA	1361 mA	90%	JCP4024T0312
	3.3 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	100 mA	1333 mA	90%	JCP4024T0315
	5.0 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	100 mA	1833 mA	90%	JCP4024T0512
36-75 V	2.5 V	0 A	10.00 A	50 mA	585 mA	89%	JCP4048S2V5
	3.3 V	0 A	10.00 A	50 mA	764 mA	90%	JCP4048S3V3
	5.0 V	0 A	8.80 A	60 mA	926 mA	90%	JCP4048S05
	12.0 V	0 A	3.33 A	60 mA	916 mA	91%	JCP4048S12
	15.0 V	0 A	2.66 A	60 mA	906 mA	92%	JCP4048S15
	±12.0 V	±0.09 A	±1.80 A	50 mA	1000 mA	90%	JCP4048D12
	±15.0 V	±0.07 A	±1.40 A	50 mA	962 mA	91%	JCP4048D15
	3.3 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	50 mA	688 mA	89%	JCP4048T0312
	3.3 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	50 mA	690 mA	87%	JCP4048T0315
	5.0 V/±12.0 V	0.60 A/±0.04 A	6.00 A/±0.40 A	50 mA	938 mA	88%	JCP4048T0512
	5.0 V/±15.0 V	0.60 A/±0.03 A	6.00 A/±0.30 A	50 mA	903 mA	90%	JCP4048T0515

Notes

1. Add suffix '-N' to model number for negative logic Remote On/Off.


2. Input current measured at nominal input voltage.

Mechanical Details

All dimensions are in inches (mm), Tolerance: ±0.02 (±0.5)


Weight: 65 g (0.14 lbs)

PIN CONNECTIONS			
Pin	Single	Dual	Triple
1	+V Input	+V Input	+V Input
2	-V Input	-V Input	-V Input
3	On/Off	On/Off	On/Off
4	NC	No Pin	+Aux. Output
5	-Sense	+V Output 1	Rtn
6	+Sense	Rtn	-Aux. Output
7	+Vout	Rtn	+V Output 1
8	Rtn	-V Output 2	Rtn
9	Trim	Trim	NC

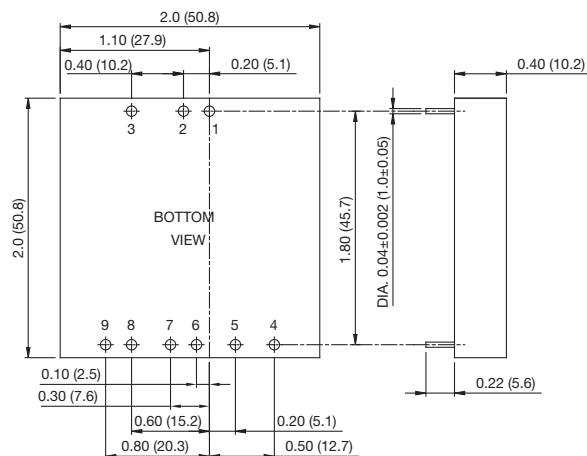

Application Notes

Derating Curve

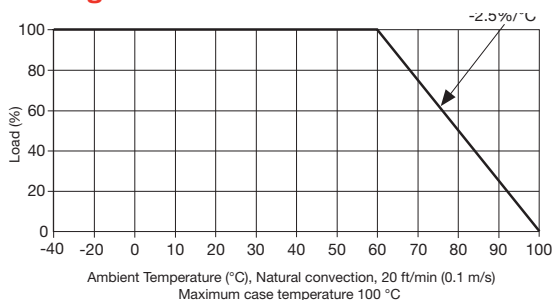

Remote On/Off Control

Standard ROF logic is positive.

Output On >3.5 to 75 VDC or open circuit

Output Off <1.8 VDC

Optional ROF logic is negative ('-N' version).

Output On <1.8 VDC

Output Off >3.5 to 75 VDC or open circuit

Remote Sense

If remote sense is not being used:

+Sense should be connected to +Vout

-Sense should be connected to Rtn.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

XP Power:

[JCP4024D12](#) [JCP4048S15](#) [JCP4048T0315](#) [JCP4012S15](#) [JCP4012T0315](#) [JCP4024T0512](#) [JCP4048S3V3](#)
[JCP4024T0515](#) [JCP4024T0315](#) [JCP4048S12](#) [JCP4012T0512](#) [JCP4012T0515](#) [JCP4048D15](#) [JCP4048S05](#)
[JCP4012S05](#) [JCP4024S3V3](#) [JCP4012S3V3](#) [JCP4012T0312](#) [JCP4048D12](#) [JCP4024T0312](#) [JCP4012D12](#)
[JCP4048T0512](#) [JCP4024S12](#) [JCP4012S12](#) [JCP4012D15](#) [JCP4024S15](#) [JCP4024D15](#) [JCP4024S05](#)
[JCP4048T0312](#)