

KFF6106A 1090 MHz TCAS BPF

Rev 1 - Origin Date: July 11, 2005 - Revision Date: February 14, 2017

Features

- Low Loss
- Narrow Bandwidth
- Excellent Return Loss

Description

Pin mounted, silver (Ag) coated ceramic filter. Developed for use in TCAS applications.

Weight: 20.1 grams typical

Material: Filter is composed of a ceramic block plated with Ag and a bracket made of 60-40 tin lead plated cold roll steel.

Electrical Specifications

Parameter	Frequency (MHz)	Typical @ 25ºC	Spec. @ 25ºC	Spec. @ -40ºC to +85ºC
Passband Insertion Loss	1087-1093	0.7 dB	1.0 dB max	1.2 dB max
Passband Return Loss	1087-1093	18.0 dB	12.5 dB min	12.0 dB min
Attenuation	970	44.0 dB	40.0 dB min	40.0 dB min

Note: Supplier shall test each filter to the critical electrical specifications of the above table. Any subsequent audits may deviate from in value due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:

Specification Allowance				
0.1 dB				
1.0 dB				
1.0 dB				

•*This product is covered by one or more of the following U.S. and foreign patents including: US 4,692,726;US 4,742,562; US 4,800,348;US 4,829,274;US 5,146,193;EP 0573597;FR 0573597;JP 508149/92;KR 142171;US 5,126,760;US 5,218,329;US 5,250,916;US 5,271,92;US 5,483,335;CA 2114029;FR 9306297;GB 2273393;JP 3205337;KR 115113;CN 93106228 4;US 5,512,866;EP 0706719;DE 0706719;FR 0706719;CB 0706719;CB

•CTS Corporation 2006 reserves all copyrights in the layout, design and configuration of the patterns on this product."

Document No. 008-0256-0

Page 1 of 2

Rev. X4VH


- CTS Electronic Components - www.ctscorp.com - 171 Covington Drive - Bloomingdale, IL 60108 -




KFF6106A 1090 MHz TCAS BPF

Mechanical Drawing


Rev 1 - Origin Date: July 11, 2005 - Revision Date: February 14, 2017

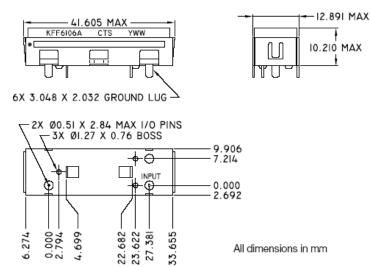

Electrical response

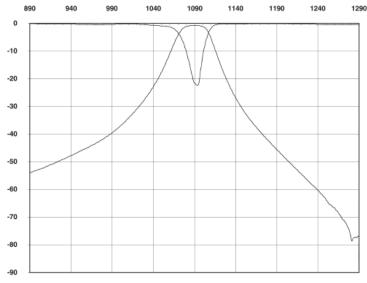


PCB Layout

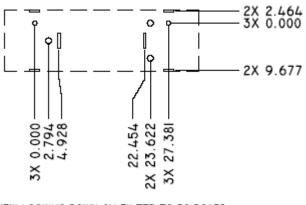


VIEW LOOKING DOWN ON FILTER TO PC BOARD

Packaging and Marking

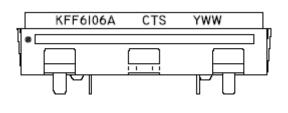

This product is shipped in pre-formed foam trays.



5 10 Slot foam Trays

(100 max. per box)

Document No. 008-0256-0

Page 2 of 2

Rev. X4VH

- CTS Electronic Components - www.ctscorp.com - 171 Covington Drive - Bloomingdale, IL 60108 -

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CTS: KFF6106A