

# HMI Solution & Graphic Products

YOUR

Disconnect

# 7" P/CAP Intelligent Display

Charging station

Remaining time

charging power 22 kW

Anti-vandalism version (IK09)

### Contents

| HAPTER 1: VERSIONS HISTORY                          |   |
|---|---|
| CHAPTER 2: GENERAL DESCRIPTION                      | 2 |
| CHAPTER 3: SPECIFICATION OF THE INTELLIGENT DISPLAY | 3 |
| MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS        | 3 |
| FUNCTIONAL CHARACTERISTICS                          | 3 |
| CHAPTER 4: DESCRIPTION OF CONNECTIONS               | 4 |
| CONNECTOR N°1: USB HOST                             | 4 |
| CONNECTOR N°2: RS232 TTL OR CAN                     | 5 |
| CONNECTOR N°3: RS232 PC                             | 5 |
| CHAPTER 5: MECHANICAL DESCRIPTION                   | 7 |
| CHAPTER 6: CLAIRITEC'S CONTACT                      | 8 |

# **Chapter 1: Versions history**

| Reference          | Modifications | Date       |
|--------------------|---------------|------------|
| DOC-20190920-1A-UK | Creation      | 20/09/2019 |
|                    |               |            |
|                    |               |            |
|                    |               |            |
|                    |               |            |
|                    |               |            |


| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK  | Page 1 / 9          |
|------------------------------|---|---------------------|
| Classification: CONFIDENTIAL | Copy or communication inhibited without written authoriza | tion from Clairitec |

### **Chapter 2: General description**

The IK Intelligent Display is a "Plug & Play" graphic display module developed & produced in France.

It consists of a TFT-LCD 7 "WVGA (800 x 480 pixels) display with integrated HMI board from CLAIRITEC and a metal protective cover.


Unlike the standard version, the IK Intelligent Display is equipped with a 4mm tempered glass optically bonded on top of the touch panel to withstand an IK09 index (IK10 possible with thicker glass). Besides, this display is twice brighter than the standard version and sunlight readable.

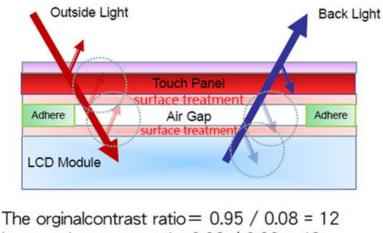

Improved contrase ratio=0.98 / 0.02 = 48 Improved 400%

The IK Intelligent Display is EMC compliant and withstands a temperature range from -20°C to +70°C.

It can fit easily into electronic equipment thanks to its 4 fixing points but a close attention must be paid to the integration in the system to withstand the IK index (the shock should not be transmitted to the 4 fixing points) :

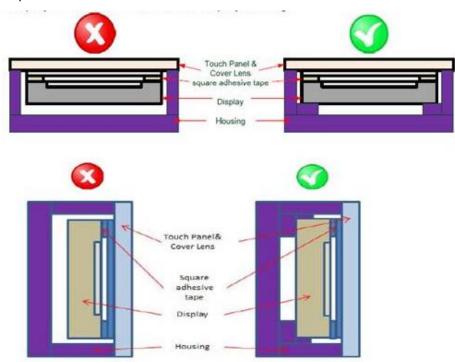

| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK  | Page 2 / 9          |
|------------------------------|---|---------------------|
| Classification: CONFIDENTIAL | Copy or communication inhibited without written authorization | tion from Clairitec |

# Chapter 3: Specification of the intelligent display

| Item                       | Specifications  |  |
|----------------------------|---|--|
| Size                       | 7" Diagonal   |  |
| Resolution                 | 800 x RGB x 480 dots (WVGA)                                   |  |
| Viewing direction          | 6 o'clock   |  |
| Viewing area               | 155.3 (W) x 94.3 (H) mm                                       |  |
| Horizontal / Vertical flip | Not available   |  |
| Backlight                  | White LED   |  |
| LED Lifetime               | 50k hours   |  |
| Brightness                 | 850 cd/m <sup>2</sup> , sunlight readable                     |  |
| Viewing angle (typ.)       | 130° Vertical / 140° Horizontal                               |  |
| Touch screen               | Capacitive / Minimum of 50 million touch times by finger      |  |
| Operating temperature      | -20°C ~ +70°C   |  |
| Storage temperature        | -30°C ~ +80°C   |  |
| EMC compliant              | NF-EN55032 class B (Frequency range 150 kHz to 2 GHz)         |  |
|                            | NF-EN61000-4-2 (8 kV contact discharge / 15 kV air discharge) |  |
|                            | NF-EN61000-4-3 (Frequency range : 30 MHz to 1 GHz – 10 V/m)   |  |
| Outline dimension          | 186.8 (W) x 104.4 (H) x 17.7 (D) mm                           |  |
| Weight                     | 400 g. for stainless steel protective cover                   |  |

#### MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS


#### FUNCTIONAL CHARACTERISTICS

| Item                             | Specifications   |
|----------------------------------|--|
| Color LCD Management             | 262k colors (display) – 16M (controller)                       |
|                                  | TFT transmissive active matrix                                 |
| Touchscreen Management           | Advanced clicking area processing                              |
| Graphic Engine                   | Advanced display algorithms                                    |
| Graphic pages Management         | Two pages dynamically managed                                  |
| Storage Memory                   | 32 Mb  |
| Graphical Layout Management      | GraphConverter®3 software tool enables you to build your HMI's |
|                                  | graphic library and upload it in the board flash memory        |
| Communication Bus                | RS232 serial (9600bds to 355Kbds)                              |
|                                  | CAN 2.0B (100Kbds to 500Kbds)                                  |
|                                  | USB  |
| Power Supply                     | 5V (+/-2%) or 6-36V +/- 5%                                     |
| Inrush current (5V version only) | 1.5A / 500us   |
| Maximum Consumption              | 4.5W   |

| Classification: CONFIDENTIAL | Copy or communication inhibited without written authoriza | tion from Clairitec |
|------------------------------|---|---------------------|
| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK  | Page 3 / 9          |

### **Chapter 4: Description of connections**

The Clairitec Intelligent Display has three communication connectors as shown in the photo below:

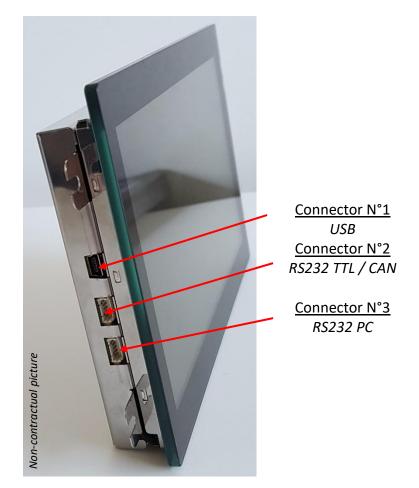

#### CONNECTOR N°1: USB

This connector allows you to update firmware, and the graphics chart via a computer or a USB key. Thanks to its transfer via USB, the loading time is decreased. Requires a standard adapter USB -> mini USB, available in the starter kit.

|   | · · · · · ·                 |
|---|-----------------------------|
|   | 3 <sup>4</sup> <sup>5</sup> |
| R | ~2                          |

| Pin number | I/O   | Description                  |
|------------|-------|------------------------------|
| 1          | Power | Power Supply +5V / 500mA max |
| 2          | I/O   | USB -                        |
| 3          | I/O   | USB +                        |
| 4          | -     | Reserved                     |
| 5          | Power | GND                          |

| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK  | Page 4 / 9          |
|------------------------------|---|---------------------|
| Classification: CONFIDENTIAL | Copy or communication inhibited without written authoriza | tion from Clairitec |

#### CONNECTOR N°2: RS232 TTL OR CAN

Connection Interface for serial communication EIA / RS232E or CAN2.0B between the Clairitec HMI board and your application board.

- $\rightarrow$  Update the firmware with the RS232 SpiderGraph protocol,
- $\rightarrow$  Update your graphic chart with the RS232 SpiderGraph protocol,
- $\rightarrow$  Send and receive commands with the RS232 or Can2.0B SpiderGraph protocol.

<u>PCB base reference</u>: Wurth: 653105131822 Molex: 53261-0571

#### <u>Matting model</u>: Wurth: 653005113322 Molex: 51021-0500

2 3 4 5 1 2 3 4

| Pin number | I/O   | Description           |
|------------|-------|-----------------------|
| 1          | Power | Power Supply +12V     |
| 2          | Power | GND                   |
| 3          | I/O   | RS232 TTL TX or CAN H |
| 4          | I/O   | RS232 TTL RX or CAN L |
| 5          | Power | GND                   |

#### CONNECTOR N°3: RS232 PC

Connection Interface for serial communication EIA / RS232E between the Clairitec HMI board and your application board.

- $\rightarrow$  Update the firmware with the RS232 SpiderGraph protocol,
- ightarrow Update your graphic chart with the RS232 SpiderGraph protocol,
- ightarrow Send and receive commands with the RS232 SpiderGraph protocol.

<u>PCB base reference</u>: Wurth: 653105131822 Molex: 53261-0571

#### <u>Matting model</u>: Wurth: 653005113322 Molex: 51021-0500

| Pin number | I/O   | Description        |
|------------|-------|--------------------|
| 1          | Power | Power Supply +12V  |
| 2          | Power | GND                |
| 3          | 0     | RS232 TX (EIA/232) |
| 4          | I     | RS232 RX (EIA/232) |
| 5          | Power | GND                |

| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK   | Page 5 / 9 |
|------------------------------|--|------------|
| Classification: CONFIDENTIAL | Copy or communication inhibited without written authorization from Clairitec |            |

#### CLAIRITEC

#### CONNECTOR N°4: ONLY FOR REAL TIME VIDEO VERSIONS

Connection interface for real time analogic video streaming (NTSC or PAL).





PCB base reference: Samtec: MCX7–J–P–H–ST


<u>Matting model</u>: Samtec: RF179 + 75 ohm cable <u>https://www.samtec.com/products/rf179</u>

| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK   | Page 6 / 9 |  |
|------------------------------|--|------------|--|
| Classification: CONFIDENTIAL | Copy or communication inhibited without written authorization from Clairitec |            |  |

### **Chapter 5: Mechanical description**

#### Unit: mm

The dimensions of the coverglass are not included in this drawing as it is specific to the customer equipment and the integration method.

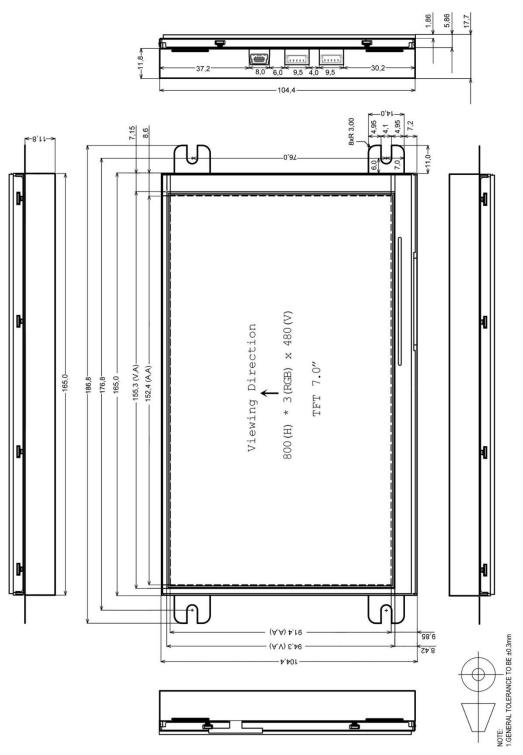

| Classification: CONFIDENTIAL | Copy or communication inhibited without written authorization from Clairitec |            |  |
|------------------------------|--|------------|--|
| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK   | Page 7 / 9 |  |

#### CLAIRITEC

## **Chapter 6: Clairitec's contact**

#### Clairitec

CLAIRITEC 11 avenue Henri Becquerel 33700 Mérignac FRANCE

Website: www.clairitec.com

#### **Clairitec services**

Customer relation service: contact@clairitec.com

Technical support service: <a href="mailto:support@clairitec.com">support@clairitec.com</a>

| CLAIRITEC 20/09/2019         | DOC-20190920-1A-UK   | Page 8 / 9 |  |
|------------------------------|--|------------|--|
| Classification: CONFIDENTIAL | Copy or communication inhibited without written authorization from Clairitec |            |  |











16

11, avenue Henri Bequerel - 33700 - MERIGNAC - FRANCE

Email: contact@clairitec.com www.clairitec.com

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Clairitec: FA49-02593