

# CRTL Series Lighted Double-pole Rocker Switches

**Approvals**

UL recognized, CSA certified. Load rating: 20A 125/250 VAC. 1 HP, 125/250 VAC. 14A 14VDC, VDE approval 15A. Contacts: fine silver for long life dependability. Dielectric strength: 1250 volts (live parts to ground). Life: 35,000 operations at maximum rating. Insulation resistance: 5 megohms.

**Low Level Control**

For low level/dry circuit applications (<100 am) contact factory for part number (Gold plated contacts).

**High Inrush**

125 Amp inrush capability (AgNi contacts). Positive action on/off available..

**Terminals**

Style A - 1/4-inch quick-connect

**Mechanical Features**

100,000 mechanical operations

**Lamps**

6, 12 and 28 volt incandescent lamps standard. 125 and 250 volt neon lamps standard.

**Special Lamps**

Green neon 125 and 250 volt lamps. Consult factory.

**LED Display**

LED display options available.

**Markings**

Letters, numbers and symbols can be applied to rocker actuator






or to integral nylon bezel; see inside back cover for details.

**Mounting**

Snap-in type panel mounting for ease of installation without additional mounting hardware.


Circuit	Switching		
11	DPST Maintained Refer to Note 1		
44	DPST (Momentary) Normally Open Refer to Note 1		
110	DPST Maintained Independent Lamp		
111	DPST Maintained Furnished with the lamp internally connected to light when the actuator is pushed to on.		

**NOTE 1.** Furnished with one side of the lamp internally connected and a single lamp-terminal at the back of the switch.

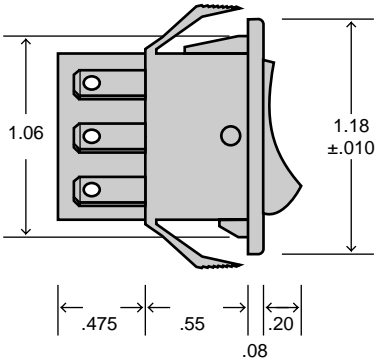

Panel Cut Out  
Panel Thickness 1/32" - 3/16"

**Ordering Information:**

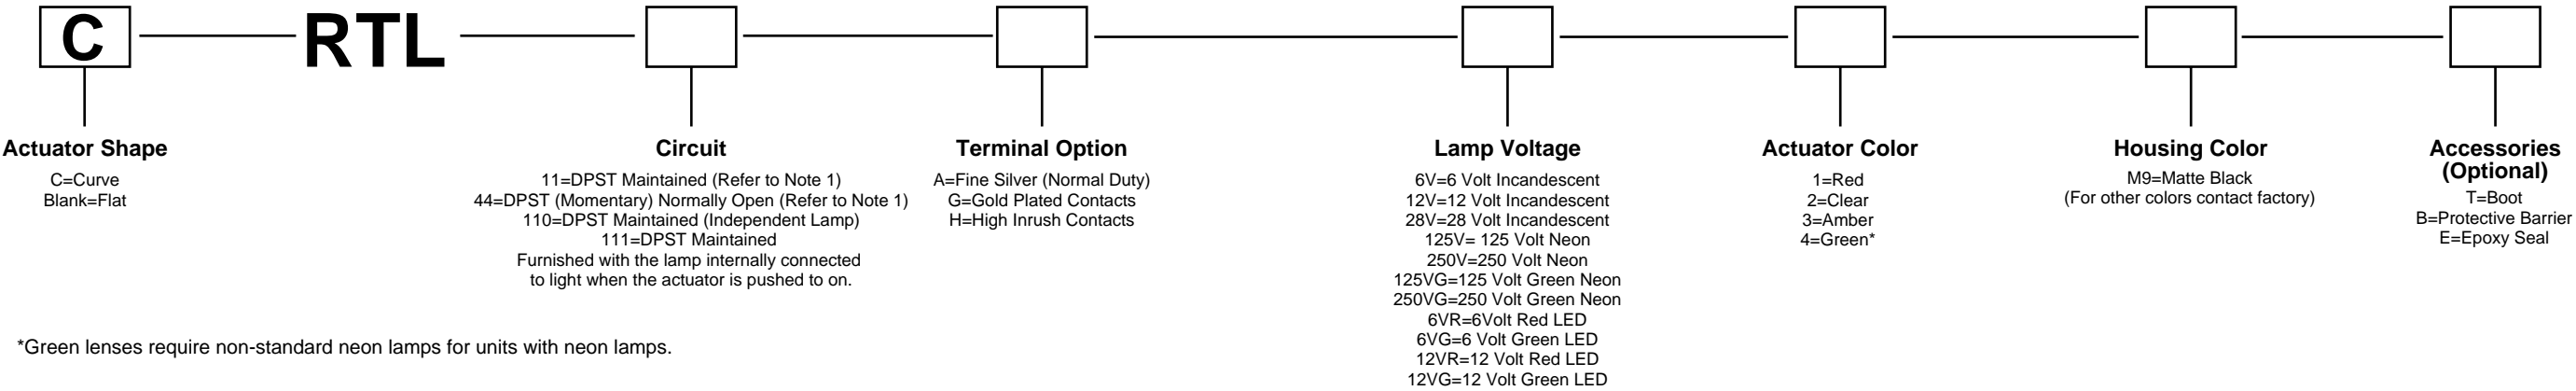

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## CW Industries:

[RTL111A28V1M9](#) [CRTL11A12V1M9E](#) [CRTL11A12V1M9](#) [RTL11A12V4M9](#) [CRTL11A250V1M9](#)  
[CRTL110A12VR29B](#) [CRTL44A12V1M9B](#) [CRTL11A125V1M9](#) [RTL111A125V1C9](#) [RTL11A125VG4C9](#)  
[CRTL11A125VG4M9](#) [CRTL110A250VG4M](#) [CRTL111H125VG4M](#) [CRTL110A28V1M9B](#) [CRTL111A250V1M9](#)  
[CRTL11A12V4M9](#) [CRTL44A28V3M9](#) [CRTL111A125V4MT](#) [RTL11A125V1M9](#) [CRTL11A12V2M9](#)  
[CRTL111A125V1M9](#) [CRTL111A125V3MB](#) [RTL111A250V1M9](#) [CRTL44A28V3M9-B](#) [CRTL110A12VR1M9](#)  
[RTL11A125V3M9](#) [CRTL111A250VG4B](#) [RTL111A250V1C9](#) [CRTL110A12VR2M9B](#) [CRTL111A250VG4M](#)  
[CRTL110A125VG4M](#) [RTL111A125V1M9](#) [CRTL11A12V5M9](#) [CRTL11A12VR2M9E](#) [CRTL111A125V3M9](#)  
[CRTL11A250V4M9B](#) [CRTL11A125V3M9](#) [RTL11A12V-3M9](#) [CRTL111A250V3M9](#) [RTL111A125V1M9B](#)  
[CRTL111A125VG4M](#) [CRTL110A12V1M9](#) [CRTL11A12V3M9](#) [CRTL111A250V3MB](#)