

8 Series

Toggle Switches

■ Introduction

The 8 Series Toggles is our high-reliability miniature switch product offering. This product line meets and exceeds all basic international switch standards.

With 8 toggle options, PC and solder lug terminals, power and logic level current ratings, 1-4 pole and many circuit offerings these switches can be used in many industries and various applications within these industries.

Four of the 8 Series lines are washable. Specifically designed for PC applications with automated solder and cleaning methods.

The 8 Series is available with UL Recognition and CSA Certification upon request from the customer.

■ Applications

- Communication equipment
- Computer peripheral equipment
- Measuring instruments
- Medical equipment
- Automotive diagnosis

The switches can be used in a wide range of fields from industrial to consumer equipment.

■ Features of 8 Series Toggles





- 1. Terminal style :**
Solder, Straight, Right angle and vertical mount PC terminals.
- 2. Contacts :**
Silver or gold.
- 3. Epoxy resin case :**
UL94V-0 self-extinguishing epoxy.
- 4. Actuator styles :**
Over 30 actuator variations.
- 5. Insulation between terminal and ground :**
4 mm minimum.
- 6. Prevention of flux entry**
The epoxy resin seal on bottom of the switch helps prevent the entry of solder and flux.
- 7. Insulation barrier :**
Insulation barrier design between poles helps prevent short-circuiting between poles ensuring high reliability.
- 8. UL Recognized product File No.E43275**
- 9. CSA Certified product File No.LR38341**
- 10. For the UL Recognized and CSA Certified products please see page 358.**

8 Series Toggles Selection Table

Part No.	Name	Actuator shape	Number of poles	Switching function	Terminals	Page
8A	Standard toggle		1•2•3•4	ON - - ON ON - OFF - ON ※1/2 Poles ON - - ON ON - OFF - ON ※3/4 Poles ON - ON - ON ※8A Type 4 Poles only	 	341 ~ 343
8B	Mustang Toggle		1•2•3•4		 	344 ~ 345
8C	Flatted Toggle		1•2•3		 	346 ~ 347
8E	Lever Lock Toggle		1•2•3•4		 	348 ~ 349
8F	Splash Proof Toggle		1•2•4		 	350 ~ 351
8J	Short Toggle		1•2•3•4		 	352 ~ 353
Board mounting washable	8G	Short Toggle Washable	1•2	ON - - ON ON - OFF - ON (ON) - OFF - (ON) ON - - (ON)	  	354 ~ 355
	8GA	Standard Toggle Washable	1•2		  	356
Board mounting	8K	Short Toggle	1•2	ON - - ON	  	357 ~ 358
	8KA	Standard Toggle	1•2		  	359

() indicates momentary actuation

Terminals

Solder Lug (Style:1)	PC Straight (Style:2)	Right Angle (Style:4)	Vertical Mounting (Style:6)
t=0.8 	t=0.8 PC 	t=0.8 R/A 	t=0.8 w=1.2 V/M 

8 Series Toggles

Part Numbering

8

A

1

01

1

C - Z

Series code

Actuator shape

Number of poles

Switching function

Terminals

Contact material and plating

Code	Type
A	Standard Toggle
B	Mustang Toggle
C	Flatted Toggle
E	Lever-lock Toggle
F	Splash Proof Toggle
J	Short Toggle
G	Board mounting washable
K	Board mounting

Fig.	Number of poles
1	1 pole
2	2 poles
3	3 poles
4	4 poles

Code	Switching function
01	ON — ON
02	ON — OFF — ON
04	(ON) — OFF — (ON)
06	ON — (ON)
※10	ON — ON — ON

※ 8A Type only.

Fig.	Terminals
1	Solder Lug
2	PC Straight
4	Right Angle
6	Vertical Mounting

Code	Contact material	Plating
None	Bs + Ag or Cu + Ag	Ag
C	Bs + Ag or Cu + Ag	Ni + Au

(※1)

Bs=Brass
Cu=Copper
Ag=Silver
Ni=Nickel
Au=Gold

(※1): Switches with gold-plated contacts ("C") are made-to order products.
MOQ is 25 pcs.

Note : Some combinations may not be available. Please check the "Table of Part Numbers" for each series.

8 Series Toggles Common Specifications

Contact specs.		Silver	Gold
Rating	Max.	AC125 V 6 A AC250 V 3 A DC30 V 4 A	AC125 V 6 A AC250 V 3 A DC30 V 4 A DC20V 25mA
Initial contact resistance		10 mΩ Max. (DC2~4 V 1 A)	20 mΩ Max. (AC200 μV 1.5 mA)
Initial dielectric strength		AC1500 V / 1 minute	
Initial insulation resistance		1000 MΩ Min. (DC500 V)	
Electrical life	Alternate type	50,000/cycles	
	Momentary type	25,000/cycles	
Operating temperature range		-30~+85°C	
Storage temperature range		-40~+85°C	

8B

Mustang Toggle Switches

RoHS Compliant



Features

The 8B series is a sub-miniature toggle switch with a larger, rugged actuator and a larger bushing. Suitable for applications where panel space is limited and a larger toggle is needed.

Table of Part Numbers

Terminal Style	Number of poles		1 pole	2 poles	3 poles	4 poles
	Switching Function					
Solder Lug	ON	– ON	8B1011-Z	☆ 8B2011-Z	☆ 8B3011-Z	★ 8B4011-Z
	ON	– OFF – ON	—	★ 8B2021-Z	—	—
PC Straight	ON	– ON	☆ 8B1012-Z	★ 8B2012-Z	—	—

■ **PC Hole Layouts** Page 360.

■ **Panel Cut-Out Dimensions** Page 360.

■ **Terminal Style** Page 339.

■ **Soldering, Flux Cleaning and Packing Spec.** Page 359.

■ **Optional Accessories** Page 361.

《Sold separately》

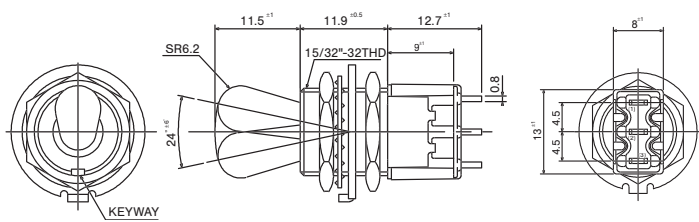

Color Cap		
Dimensions	Color	Part. No.
	White Red Black	140000470063 140000470108 140000470064

Standard Accessories

《Supplied with switch》

Part Name	Hex Nut	Lockwasher	Locking Ring
Part No.	140008010243	140008030055	140008020065
Dimensions			
Finish	Nickel plated	Zinc plated	

SPDT

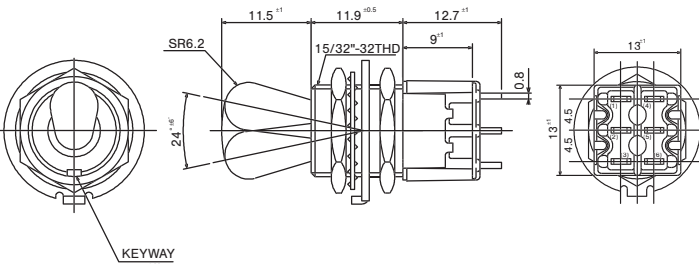



Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8B101■-Z	ON	—	ON
Connecting terminals	2-3	—	2-1

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

DPDT

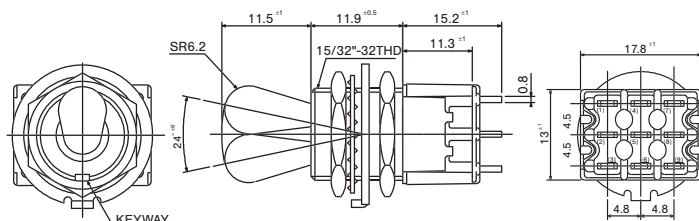



Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8B201■-Z	ON	—	ON
8B202■-Z	ON	OFF	ON
Connecting terminals	2-3 5-6	—	2-1 5-4

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

3PDT

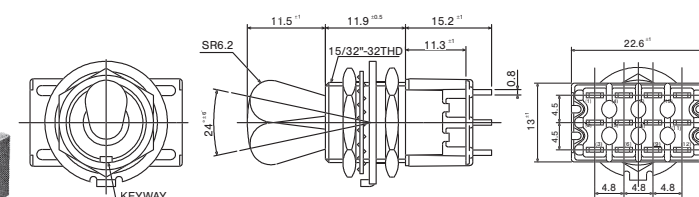



Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8B301■-Z	ON	—	ON
Connecting terminals	2-3 5-6 8-9	—	2-1 5-4 8-7

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

4PDT



Terminal numbers are not shown on the switch.

Switching function	Key way	Key way	Key way
Part No.			
8B401■-Z	ON	—	ON
Connecting terminals	2-3 5-6 8-9 11-12	—	2-1 5-4 8-7 11-10

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

UL、CSA

(Toggle Switches)

Table of 8 Series Toggles UL and CSA Listed

■ 8 Series Toggles

Poles	Switching Function			UL (※1.)						CSA (※2.)					
				8A	8B	8C	8E	8F	8J	8A	8B	8C	8E	8F	8J
1 pole	101□	ON	–	ON	○	○	○	○	○	○	○	○	○	○	○
	102□	ON	–	OFF	–	ON	○	○	○	○	○	○	○	○	○
2 poles	201□	ON	–	ON	○	○	○	○	○	○	○	○	○	○	○
	202□	ON	–	OFF	–	ON	○	○	○	○	○	○	○	○	○
3 poles	301□	ON	–	ON	○	○	○	○	○	○	○	○	○	○	○
4 poles	401□	ON	–	ON	○	○	○	○	○	○	○	○	○	○	○
	410□	ON	–	ON	–	ON	○	○	○	○	○	○	○	○	○

(1) Terminal types: 1 Solder terminal; 2 Straight terminal

(2) Even if the products are of UL-or CSA-approved ones. The products in stock do not carry the UL mark of the CSA mark. When placing an order,be sure to specify “ With UL/CSA Mark.” For the products with the UL mark or the CSA mark,extra costs will be added.

(3) (※1.) UL File No.E43275

(※2.) CSA File No.LR38341

(4) As shown in the above chart, not all products are UL-recognized or CSA-certified. Please check with your local sales representative if you have any questions.

■ Precautions (8A•8B•8C•8E•8F•8J)

1. Soldering Specifications

(1) Manual soldering

Device : Solder iron

① 420°C Max. 3 sec. Max.

(2) Auto soldering

② 275°C Max. 6 sec. Max.

The above-stated soldering conditions shall apply only to switches with straight terminals. Auto soldering is not possible with right-angle terminals. Switches with right-angle terminals should be soldered manually according to the conditions specified in (1) above.

(3) When soldering two or more terminals to the common land, use the solder resist to isolate the terminals.

3. Mounting

● Do not bend the terminals before mounting the switch on the PC board.

● After mounting the switch, do not place the device in such a way that the device weight will be applied on to the actuator of the switch.

● For switches with straight terminals, solder the switch on the PC board after fixing the switch on the panel with a nut.

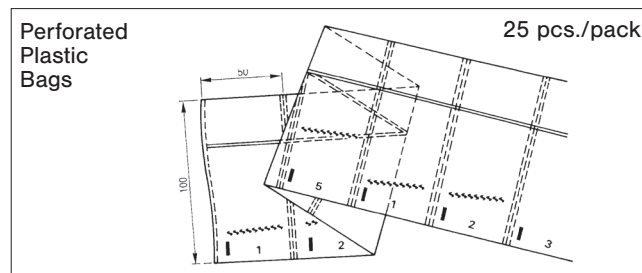
2. Flux Cleaning

(1) Solvent : Fluorine or Alcohol type.

(2) 8A/B/C/E/F/J series are not washable. To wash the PC board, clean the soldering surface of the PC board with a brush so that the switch is not exposed to the cleaning solution.






(3) Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.

■ Packaging Specification




8 Series Toggles

Panel Cut-Out Dimensions









Series	8A·8J	8C	8E	8A·8J	8C	8E	8F
Panel thickness	2.5 mm Max.	2.4 mm Max.	1.5 mm Max.	3.5 mm Max.	3.4 mm Max.	2.5 mm Max.	5 mm Max.
Dimensions	 With Locking Ring			 Without Locking Ring			
Series	8B						
Panel thickness	5.9 mm Max.			6.9 mm Max.			
Dimensions	 With Locking Ring			 Without Locking Ring			

PC Hole Layouts

Series	8A · 8B · 8C · 8E · 8F · 8J
Dimensions	

Standard Accessories





《Q'ty / switch》


Part Name	Dress Nut	Hex Nut	Lockwasher	Locking Ring	O-Ring	Hex Nut	Lockwasher	Locking Ring
Part No.	140008010253	140008010241	140008030051	140008020062	140000610076	140008010243	140008030055	140008020065
Dimensions								
Finish	Nickel plated		Zinc plated		Nitrile rubber (Black)	Nickel plated	Zinc plated	
8A		2	1	1				
8B						2	1	1
8C	1	1	1	1				
8D		2	1	1				
8E		2	1	1				
8F		1	1		1			
8J		2	1	1				

● Numbers in the above chart show the quantities of each accessories enclosed with the switch.

■ Optional Accessories

《Sold separately》

Type	8A • 8F • 8GA • 8KA	8A • 8F • 8GA • 8KA	8B	8E
Part Name	Color Cap			
Dimensions	 Gloss finish Vinyl chloride resin	 Gloss finish Vinyl chloride resin	 Gloss finish Vinyl chloride resin	 Alumite finish Aluminum alloy
Silver	—	—	—	140000470058
White	140000470030	140000470038	140000470063	—
Red	140000470098	140000470100	140000470108	140000470060
Black	140000470031	—	140000470064	140000470059
Gray	140000470037	140000470077	—	—

Type	8A
Part Name	Waterproof boot
Part No.	140000470422
Dimensions	 With Nut (1/4" —40THD)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nidec:](#)

[8B1011-Z](#) [8B1012-Z](#) [8B1041-Z](#) [8B2011-Z](#) [8B2012-Z](#) [8B2021-Z](#) [8B3011-Z](#) [8B4011-Z](#)