

# 8 Series

## Toggle Switches

### ■ Introduction

The 8 Series Toggles is our high-reliability miniature switch product offering. This product line meets and exceeds all basic international switch standards.

With 8 toggle options, PC and solder lug terminals, power and logic level current ratings, 1-4 pole and many circuit offerings these switches can be used in many industries and various applications within these industries.

Four of the 8 Series lines are washable. Specifically designed for PC applications with automated solder and cleaning methods.

The 8 Series is available with UL Recognition and CSA Certification upon request from the customer.

### ■ Applications

- Communication equipment
- Computer peripheral equipment
- Measuring instruments
- Medical equipment
- Automotive diagnosis

The switches can be used in a wide range of fields from industrial to consumer equipment.

### ■ Features of 8 Series Toggles





- 1. Terminal style :**  
Solder, Straight, Right angle and vertical mount PC terminals.
- 2. Contacts :**  
Silver or gold.
- 3. Epoxy resin case :**  
UL94V-0 self-extinguishing epoxy.
- 4. Actuator styles :**  
Over 30 actuator variations.
- 5. Insulation between terminal and ground :**  
4 mm minimum.
- 6. Prevention of flux entry**  
The epoxy resin seal on bottom of the switch helps prevent the entry of solder and flux.
- 7. Insulation barrier :**  
Insulation barrier design between poles helps prevent short-circuiting between poles ensuring high reliability.
- 8. UL Recognized product      File No.E43275**
- 9. CSA Certified product      File No.LR38341**
- 10. For the UL Recognized and CSA Certified products please see page 358.**

## 8 Series Toggles Selection Table

| Part No.        | Name                                | Actuator shape                                                                      | Number of poles | Switching function                                                                                                               | Terminals                                                                                                                                                                                                                                                                                             | Page         |
|-----------------|-------------------------------------|-------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>8A</b>       | Standard toggle                     |    | 1•2•3•4         | ON - - ON<br>ON - OFF - ON<br>※1/2 Poles<br>ON - - ON<br>ON - OFF - ON<br>※3/4 Poles<br>ON - ON - ON<br>※8A Type<br>4 Poles only |  <br>Solder Lug Straight PC                                                                                                     | 341<br>} 343 |
| <b>8B</b>       | Mustang Toggle                      |    | 1•2•3•4         |                                                                                                                                  |  <br>Solder Lug Straight PC                                                                                                     | 344<br>} 345 |
| <b>8C</b>       | Flatted Toggle                      |    | 1•2•3           |                                                                                                                                  |  <br>Solder Lug Straight PC                                                                                                     | 346<br>} 347 |
| <b>8E</b>       | Lever Lock Toggle                   |    | 1•2•3•4         |                                                                                                                                  |  <br>Solder Lug Straight PC                                                                                                     | 348<br>} 349 |
| <b>8F</b>       | Splash Proof Toggle                 |    | 1•2•4           |                                                                                                                                  |  <br>Solder Lug Straight PC                                                                                                     | 350<br>} 351 |
| <b>8J</b>       | Short Toggle                        |   | 1•2•3•4         |                                                                                                                                  |  <br>Solder Lug Straight PC                                                                                                   | 352<br>} 353 |
| <b>Washable</b> | <b>8G</b> Short Toggle Washable     |  | 1•2             | ON - - ON<br>ON - OFF - ON<br>(ON) - OFF - (ON)<br>ON - - (ON)                                                                   |   <br>Straight PC Right Angle Vertical | 354<br>} 355 |
|                 | <b>8GA</b> Standard Toggle Washable |  | 1•2             |                                                                                                                                  |   <br>Straight PC Right Angle Vertical | 356          |

( ) indicates momentary actuation

### Terminals

| Solder Lug (Style:1)                                                                         | PC Straight (Style:2)                                                                              | Right Angle (Style:4)                                                                                | Vertical Mounting (Style:6)                                                                                    |
|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| t=0.8<br> | t=0.8<br>PC<br> | t=0.8<br>R/A<br> | t=0.8<br>w=1.2<br>V/M<br> |

8 Series Toggles

Part Numbering

8

A

1

01

1

C - Z

Series code

Actuator shape

Number of poles

Switching function

Terminals

Contact material and plating

| Code | Type                |
|------|---------------------|
| A    | Standard Toggle     |
| B    | Mustang Toggle      |
| C    | Flatted Toggle      |
| E    | Lever-lock Toggle   |
| F    | Splash Proof Toggle |
| J    | Short Toggle        |
| G    | Washable            |

| Fig. | Number of poles |
|------|-----------------|
| 1    | 1 pole          |
| 2    | 2 poles         |
| 3    | 3 poles         |
| 4    | 4 poles         |

| Code | Switching function |
|------|--------------------|
| 01   | ON — ON            |
| 02   | ON — OFF — ON      |
| 06   | ON — (ON)          |
| ※10  | ON — ON — ON       |

※8A Type only.

| Fig. | Terminals         |
|------|-------------------|
| 1    | Solder Lug        |
| 2    | PC Straight       |
| 4    | Right Angle       |
| 6    | Vertical Mounting |

| Code | Contact material | Plating |
|------|------------------|---------|
| None | Bs+Ag or Cu+Ag   | Ag      |
| C    | Bs+Ag or Cu+Ag   | Ni+Au   |

(※1)

Bs=Brass  
Cu=Copper  
Ag=Silver  
Ni=Nickel  
Au=Gold

(※1) : Switches with gold-plated contacts ("C") are made-to order products.  
MOQ is 25 pcs.

Note : Some combinations may not be available. Please check the "Table of Part Numbers" for each series.

8 Series Toggles Common Specifications

| Contact specs.                |                | Silver                                   | Gold                                                   |
|-------------------------------|----------------|------------------------------------------|--------------------------------------------------------|
| Rating                        | Max.           | AC125 V 6 A<br>AC250 V 3 A<br>DC30 V 4 A | AC125 V 6 A<br>AC250 V 3 A<br>DC30 V 4 A<br>DC20V 25mA |
| Initial contact resistance    |                | 10 mΩ Max.<br>(DC2~4 V 1 A)              | 20 mΩ Max.<br>(AC200 μV 1.5 mA)                        |
| Initial dielectric strength   |                | AC1500 V /1 minute                       |                                                        |
| Initial insulation resistance |                | 1000 MΩ Min. (DC500 V)                   |                                                        |
| Electrical life               | Alternate type | 50,000/cycles                            |                                                        |
|                               | Momentary type | 25,000/cycles                            |                                                        |
| Operating temperature range   |                | -30~+85°C                                |                                                        |
| Storage temperature range     |                | -40~+85°C                                |                                                        |

# 8J

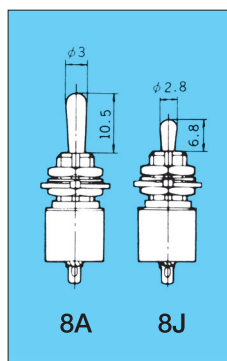
## Short Toggle Switches

RoHS Compliant



### Features

The 8J series has a shorter actuator (6.8 mm) than the 8A series. Suitable for applications where space is limited.



### Table of Part Numbers

| Terminal Style | Number of poles    |         |    | 1 pole                                | 2 poles           | 3 poles           | 4 poles           |
|----------------|--------------------|---------|----|---------------------------------------|-------------------|-------------------|-------------------|
|                | Switching Function |         |    |                                       |                   |                   |                   |
| Solder Lug     | ON                 | —       | ON | <b>8J1011-Z</b>                       | ★ <b>8J2011-Z</b> | —                 | ★ <b>8J4011-Z</b> |
|                | ON                 | — OFF — | ON | <b>8J1021-Z</b>                       | ★ <b>8J2021-Z</b> | ★ <b>8J3021-Z</b> | —                 |
| PC Straight    | ON                 | —       | ON | <b>8J1012-Z</b><br>▲ <b>8J1012C-Z</b> | <b>8J2012-Z</b>   | ★ <b>8J3012-Z</b> | —                 |
|                | ON                 | — OFF — | ON | ★ <b>8J1022-Z</b>                     | —                 | —                 | —                 |

### Standard Accessories

《Supplied with switch》

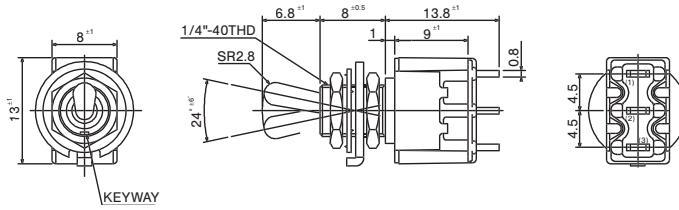

| Part Name  | Hex Nut             | Lockwasher          | Locking Ring        |
|------------|---------------------|---------------------|---------------------|
| Part No.   | <b>140008010241</b> | <b>140008030051</b> | <b>140008020062</b> |
| Dimensions |                     |                     |                     |
| Finish     | Nickel plated       | Zinc plated         | Zinc plated         |

■ **PC Hole Layouts** Page 360.

■ **Panel Cut-Out Dimensions** Page 360.

■ **Terminal Styles** Page 339.

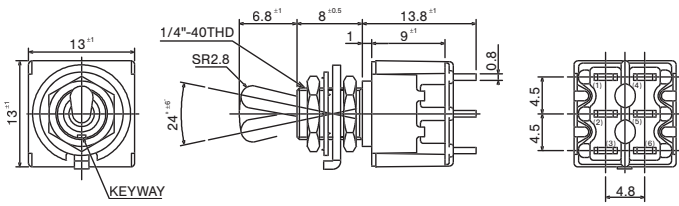
■ **Soldering, Flux Cleaning and Packaging Spec.** Page 359.

**SPDT**

Terminal numbers are not shown on the switch.

| Switching function   | Key way | Key way | Key way |
|----------------------|---------|---------|---------|
| Part No.             |         |         |         |
| <b>8J101-Z</b>       | ON      | —       | ON      |
| <b>8J102-Z</b>       | ON      | OFF     | ON      |
| Connecting terminals | 2-3     | —       | 2-1     |

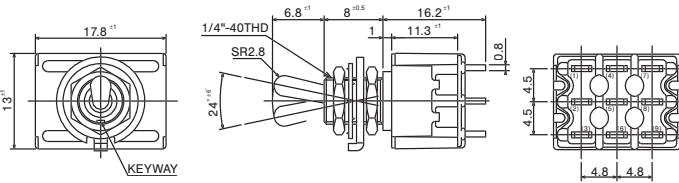
■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

**DPDT**

Terminal numbers are not shown on the switch.

| Switching function   | Key way    | Key way | Key way    |
|----------------------|------------|---------|------------|
| Part No.             |            |         |            |
| <b>8J201-Z</b>       | ON         | —       | ON         |
| <b>8J202-Z</b>       | ON         | OFF     | ON         |
| Connecting terminals | 2-3<br>5-6 | —       | 2-1<br>5-4 |

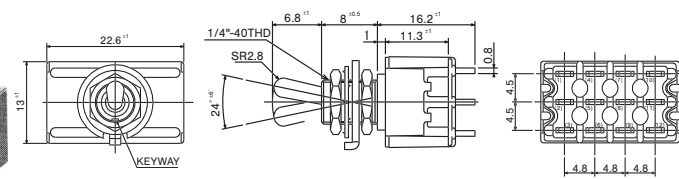

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

**3PDT**

Terminal numbers are not shown on the switch.

| Switching function   | Key way        | Key way | Key way        |
|----------------------|----------------|---------|----------------|
| Part No.             |                |         |                |
| <b>8J301-Z</b>       | ON             | —       | ON             |
| <b>8J302-Z</b>       | ON             | OFF     | ON             |
| Connecting terminals | 2-3 5-6<br>8-9 | —       | 2-1 5-4<br>8-7 |

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

**4PDT**

Terminal numbers are not shown on the switch.

| Switching function   | Key way              | Key way | Key way              |
|----------------------|----------------------|---------|----------------------|
| Part No.             |                      |         |                      |
| <b>8J401-Z</b>       | ON                   | —       | ON                   |
| Connecting terminals | 2-3 5-6<br>8-9 11-12 | —       | 2-1 5-4<br>8-7 11-10 |

■ : Please refer to "Table of Part Numbers" for a list of full part numbers.

# UL、CSA

(Toggle Switches)

## Table of 8 Series Toggles UL and CSA Listed

### ■ 8 Series Toggles

| Poles   | Switching Function |    |   | UL (※1.) |    |    |    |    |    | CSA (※2.) |    |    |    |    |    |
|---------|--------------------|----|---|----------|----|----|----|----|----|-----------|----|----|----|----|----|
|         |                    |    |   | 8A       | 8B | 8C | 8E | 8F | 8J | 8A        | 8B | 8C | 8E | 8F | 8J |
| 1 pole  | 101□               | ON | – | ON       | ○  | ○  | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |
|         | 102□               | ON | – | OFF      | –  | ON | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |
| 2 poles | 201□               | ON | – | ON       | ○  | ○  | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |
|         | 202□               | ON | – | OFF      | –  | ON | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |
| 3 poles | 301□               | ON | – | ON       | ○  | ○  | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |
| 4 poles | 401□               | ON | – | ON       | ○  | ○  | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |
|         | 410□               | ON | – | ON       | –  | ON | ○  | ○  | ○  | ○         | ○  | ○  | ○  | ○  | ○  |

(1) Terminal types: 1 Solder terminal; 2 Straight terminal

(2) Even if the products are of UL-or CSA-approved ones. The products in stock do not carry the UL mark of the CSA mark. When placing an order,be sure to specify “ With UL/CSA Mark.” For the products with the UL mark or the CSA mark,extra costs will be added.

(3) (※1.) UL File No.E43275

(※2.) CSA File No.LR38341

(4) As shown in the above chart, not all products are UL-recognized or CSA-certified. Please check with your local sales representative if you have any questions.

## ■ Precautions (8A•8B•8C•8E•8F•8J)

### 1. Soldering Specifications

#### (1) Manual soldering

Device : Solder iron

① 420°C Max. 3 sec. Max.

#### (2) Auto soldering

② 275°C Max. 6 sec. Max.

The above-stated soldering conditions shall apply only to switches with straight terminals. Auto soldering is not possible with right-angle terminals. Switches with right-angle terminals should be soldered manually according to the conditions specified in (1) above.

#### (3) When soldering two or more terminals to the common land, use the solder resist to isolate the terminals.

### 3. Mounting

● Do not bend the terminals before mounting the switch on the PC board.

● After mounting the switch, do not place the device in such a way that the device weight will be applied on to the actuator of the switch.

● For switches with straight terminals, solder the switch on the PC board after fixing the switch on the panel with a nut.

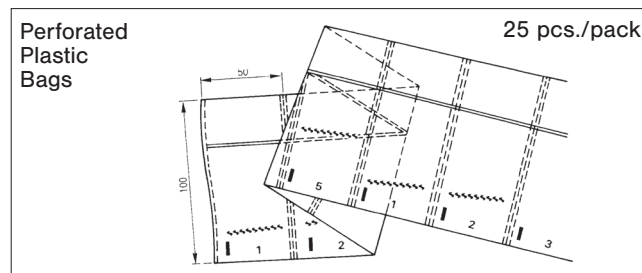
### 2. Flux Cleaning

(1) Solvent : Fluorine or Alcohol type.

(2) 8A/B/C/E/F/J series are not washable. To wash the PC board, clean the soldering surface of the PC board with a brush so that the switch is not exposed to the cleaning solution.






(3) Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.

## ■ Packaging Specification




## 8 Series Toggles

### Panel Cut-Out Dimensions









| Series          | 8A·8J                                                                                                  | 8C          | 8E          | 8A·8J                                                                                                      | 8C          | 8E          | 8F                                                                                  |
|-----------------|--------------------------------------------------------------------------------------------------------|-------------|-------------|------------------------------------------------------------------------------------------------------------|-------------|-------------|-------------------------------------------------------------------------------------|
| Panel thickness | 2.5 mm Max.                                                                                            | 2.4 mm Max. | 1.5 mm Max. | 3.5 mm Max.                                                                                                | 3.4 mm Max. | 2.5 mm Max. | 5 mm Max.                                                                           |
| Dimensions      | <br>With Locking Ring |             |             | <br>Without Locking Ring  |             |             |  |
| Series          | 8B                                                                                                     |             |             |                                                                                                            |             |             |                                                                                     |
| Panel thickness | 5.9 mm Max.                                                                                            |             |             | 6.9 mm Max.                                                                                                |             |             |                                                                                     |
| Dimensions      | <br>With Locking Ring |             |             | <br>Without Locking Ring |             |             |                                                                                     |

### PC Hole Layouts

| Series     | 8A · 8B · 8C · 8E · 8F · 8J                                                         |
|------------|-------------------------------------------------------------------------------------|
| Dimensions |  |

### Standard Accessories

《Q'ty / switch》





| Part Name  | Dress Nut                                                                                                                          | Hex Nut                                                                                                           | Lockwasher                                                                          | Locking Ring                                                                        | O-Ring                                                                              | Hex Nut                                                                                                              | Lockwasher                                                                            | Locking Ring                                                                          |
|------------|------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Part No.   | 140008010253                                                                                                                       | 140008010241                                                                                                      | 140008030051                                                                        | 140008020062                                                                        | 140000610076                                                                        | 140008010243                                                                                                         | 140008030055                                                                          | 140008020065                                                                          |
| Dimensions |  |  |  |  |  |  |  |  |
| Finish     | Nickel plated                                                                                                                      |                                                                                                                   | Zinc plated                                                                         |                                                                                     | Nitrile rubber (Black)                                                              | Nickel plated                                                                                                        | Zinc plated                                                                           |                                                                                       |
| 8A         |                                                                                                                                    | 2                                                                                                                 | 1                                                                                   | 1                                                                                   |                                                                                     |                                                                                                                      |                                                                                       |                                                                                       |
| 8B         |                                                                                                                                    |                                                                                                                   |                                                                                     |                                                                                     |                                                                                     | 2                                                                                                                    | 1                                                                                     | 1                                                                                     |
| 8C         | 1                                                                                                                                  | 1                                                                                                                 | 1                                                                                   | 1                                                                                   |                                                                                     |                                                                                                                      |                                                                                       |                                                                                       |
| 8D         |                                                                                                                                    | 2                                                                                                                 | 1                                                                                   | 1                                                                                   |                                                                                     |                                                                                                                      |                                                                                       |                                                                                       |
| 8E         |                                                                                                                                    | 2                                                                                                                 | 1                                                                                   | 1                                                                                   |                                                                                     |                                                                                                                      |                                                                                       |                                                                                       |
| 8F         |                                                                                                                                    | 1                                                                                                                 | 1                                                                                   |                                                                                     | 1                                                                                   |                                                                                                                      |                                                                                       |                                                                                       |
| 8J         |                                                                                                                                    | 2                                                                                                                 | 1                                                                                   | 1                                                                                   |                                                                                     |                                                                                                                      |                                                                                       |                                                                                       |


● Numbers in the above chart show the quantities of each accessories enclosed with the switch.



## ■ Optional Accessories

《Sold separately》

| Type       | 8A • 8F • 8GA • 8KA                                                                                                               | 8A • 8F • 8GA • 8KA                                                                                                               | 8B                                                                                                                                | 8E                                                                                                                              |
|------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Part Name  | Color Cap                                                                                                                         |                                                                                                                                   |                                                                                                                                   |                                                                                                                                 |
| Dimensions |  <p>Gloss finish</p> <p>Vinyl chloride resin</p> |  <p>Gloss finish</p> <p>Vinyl chloride resin</p> |  <p>Gloss finish</p> <p>Vinyl chloride resin</p> |  <p>Alumite finish</p> <p>Aluminum alloy</p> |
| Silver     | —                                                                                                                                 | —                                                                                                                                 | —                                                                                                                                 | <b>140000470058</b>                                                                                                             |
| White      | <b>140000470030</b>                                                                                                               | <b>140000470038</b>                                                                                                               | <b>140000470063</b>                                                                                                               | —                                                                                                                               |
| Red        | <b>140000470098</b>                                                                                                               | <b>140000470100</b>                                                                                                               | <b>140000470108</b>                                                                                                               | <b>140000470060</b>                                                                                                             |
| Black      | <b>140000470031</b>                                                                                                               | —                                                                                                                                 | <b>140000470064</b>                                                                                                               | <b>140000470059</b>                                                                                                             |
| Gray       | <b>140000470037</b>                                                                                                               | <b>140000470077</b>                                                                                                               | —                                                                                                                                 | —                                                                                                                               |

| Type       | 8A                                                                                                                   |
|------------|----------------------------------------------------------------------------------------------------------------------|
| Part Name  | Waterproof boot                                                                                                      |
| Part No.   | 140000470422                                                                                                         |
| Dimensions |  <p>With Nut<br/>(1/4" —40THD)</p> |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nidec:](#)

[8J1011-Z](#) [8J1012-Z](#) [8J1021-Z](#) [8J1022-Z](#) [8J1051-Z](#) [8J2011-Z](#) [8J2012-Z](#) [8J2021-Z](#) [8J3012-Z](#) [8J3021-Z](#) [8J4011-Z](#)