


PRESSURE TRANSDUCERS WITH AMP. PA-850



FEATURES

- High corrosion resistance and drip-proof construction
Pressure port attachment made of SUS 316L
Proven IP-65 grade gauge body (IP-65 in accordance with IEC)
- Standard product provides both a switch output (hysteresis adjustable) and an analog output
- Absolute pressure type and compound pressure type which can control negative to positive pressure with only a single pressure gauge are all in line
- Three standard types of joint are provided
R2 : R 1/4 (M 5 female screw)
GF : G 3/8 with flash diaphragm
G2 : G 1/4 (M 5 female screw)

INTERNAL STRUCTURE PA-850 (R 1/4)

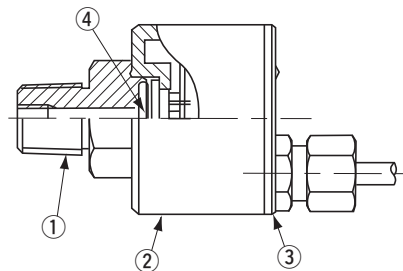

Part name		Material
①	Fitting	SUS 316L
②	Housing	SUS 316L
③	Plastic cover	ABS (Acrylonitrile butadiene styrene) + PC (Polycarbonate)
④	Stainless steel diaphragm	SUS 316L

MODEL NUMBER DESIGNATION

		PA-850 - 102 R - N R2			
Series name				Fitting	
Pressure reference		Rated pressure range		R2 : R 1/4 with M 5 female screw	
G : Gauge		102 : 0 ~ 100 kPa		GF : G 3/8 with flash diaphragm	
		352 : 0 ~ 350 kPa		G2 : G 1/4 with M 5 female screw	
		103 : 0 ~ 1000 kPa			
V : Gauge (Vacuum)		102 : 0 ~ - 100 kPa			
R : Compound		102 : - 100 ~ 100 kPa			
		302 : - 100 ~ 300 kPa			
A : Absolute		102 : 0 ~ 100 kPa abs		Switch output interface	
				N : NPN open collector (Upper limit mode)	
				P : PNP open collector (Upper limit mode)	

※ Please refer to the LIST OF MODEL NUMBERS when placing orders.

PA-850

PRESSURE TRANSDUCERS WITH AMP.

LIST OF MODEL NUMBERS

Fitting	Pressure reference		Gauge						Absolute
	SW output interface	kPa Rated pressure range	0 ~ 100	0 ~ 350	0 ~ 1000	0 ~ - 100	- 100 ~ 100	- 100 ~ 300	0 ~100
R2 (R 1/4)	NPN		PA-850-102G-NR2	PA-850-352G-NR2	PA-850-103G-NR2	PA-850-102V-NR2	PA-850-102R-NR2	PA-850-302R-NR2	PA-850-102A-NR2
	PNP		PA-850-102G-PR2	PA-850-352G-PR2	PA-850-103G-PR2	PA-850-102V-PR2	PA-850-102R-PR2	PA-850-302R-PR2	PA-850-102A-PR2
GF (G 3/8)	NPN		PA-850-102G-NGF	PA-850-352G-NGF	PA-850-103G-NGF	PA-850-102V-NGF	PA-850-102R-NGF	PA-850-302R-NGF	PA-850-102A-NGF
	PNP		PA-850-102G-PGF	PA-850-352G-PGF	PA-850-103G-PGF	PA-850-102V-PGF	PA-850-102R-PGF	PA-850-302R-PGF	PA-850-102A-PGF
G2 (G 1/4)	NPN		PA-850-102G-NG2	PA-850-352G-NG2	PA-850-103G-NG2	PA-850-102V-NG2	PA-850-102R-NG2	PA-850-302R-NG2	PA-850-102A-NG2
	PNP		PA-850-102G-PG2	PA-850-352G-PG2	PA-850-103G-PG2	PA-850-102V-PG2	PA-850-102R-PG2	PA-850-302R-PG2	PA-850-102A-PG2

※ Verify the above model numbers when placing orders.

STANDARD SPECIFICATIONS

● Unless otherwise specified, the specs are defined at an ambient temperature of 25±5 °C and excitation voltage of 12 VDC.

Item		Model number	PA-850						
			102G	352G	103G	102V	102R	302R	102A
General specifications	Pressure reference		Gauge						Absolute
	Rated pressure range kPa		100	350	1000	− 100	− 100 ~ 100	− 100 ~ 300	100 (abs)
	Maximum pressure kPa		200	700	2000	200	200	600	200 (abs)
	Break-down pressure kPa		300	1050	3000	300	300	900	300 (abs)
	Operating temp. range °C		− 20 ~ 80						
	Compensated temp. range °C		0 ~ 50						
	Operating humidity %RH		35 ~ 85 (No condensation)						
	Storage temp. °C		− 20 ~ 80 (Atmospheric pressure, humidity 65 %RH maximum)						
	Pressure medium		Corrosive gases/liquids compatible with SUS 316L						
	Insulation resistance MΩ minimum		100 (500 VDC)						
	Dielectric strength		800 VAC, 60 s (Leakage current 1 mA maximum)						
	Sealed liquid		Silicone oil						
	Pressure port		R 1/4、G 3/8 (Flash diaphragm)、G 1/4 ※ 1						
	Net weight g		R2 : Approx. 165, GF : Approx. 180, G2 : Approx. 170						
	Protection grade		IP65						

※ 1 An "O" ring provided. (G 3/8 : P18、G 1/4 : P15)

PA-850

PRESSURE TRANSDUCERS WITH AMP.

Item		Model number	PA-850						
			102G	352G	103G	102V	102R	302R	102A
Power	Supply voltage	VDC	10.8 ~ 30 (Including ripple voltage)						
	Consumption current maximum		20 mA						
Analog output	Output voltage	V	1 ~ 5						
	Zero voltage	V	1 ± 0.04			3 ± 0.1	2 ± 0.1	1 ± 0.04	
	Span voltage	V	4 ± 0.04			4 ± 0.1		4 ± 0.04	
	Output current	mA maximum	1 (Load resistance 5 kΩ minimum)						
	Linearity/Hysteresis	%F.S.	± 0.5						
	Thermal error	ZERO %F.S./°C	± 0.06						
		SPAN %F.S./°C	± 0.06						
	Supply voltage effect	V maximum	± 0.02						
	Response	ms	Approx. 2						
	Gravitational effect (From horizontal position to vertical position)	%F.S.	± 0.3	± 0.1	± 0.05	± 0.3		± 0.1	± 0.3
Switch output	No. of outputs		1						
	Output interface		NPN or PNP open collector output						
	Setting method		Adjustable by VR						
	Adjustable range		0 ~ 100 % of rated pressure range						0 ~ 108 % of rated pressure range
	Display		Red LED						
	Accuracy (Reference temp.: 25 °C)	%F.S.	± 3						
	Hysteresis		Approx. 1 ~ 15 % of set value						
	Hysteresis setting method		Adjustable by VR						
	Switching capacity		30 VDC 100 mA						
	Residual voltage		NPN : 0.8 V, PNP : 1.2 V						

ENVIRONMENTAL CHARACTERISTICS

Test item	Test conditions (At 25 ± 5 °C)	Permissible change
Vibration	10 ~ 500 Hz, 1.5 mm maximum/98.1 m/s ² , 3 directions for 2 hours each	Switch output setting and analog output (Zero voltage, Span voltage) : ± 1 %F.S. maximum each
Shock	490 m/s ² 3 directions for 3 times each	
Pressure cycling	10 ⁶ cycles 0 ~ Rated pressure/Rated pressure range	
Moisture resistance	40 °C, 90 ~ 95 %RH, 240 hrs.	


PA-850

PRESSURE TRANSDUCERS WITH AMP.

OUTLINE DIMENSIONS


Configurations of joint R2 (R1/4) type

Unless otherwise specified, tolerance : ± 0.5 (Unit: mm)

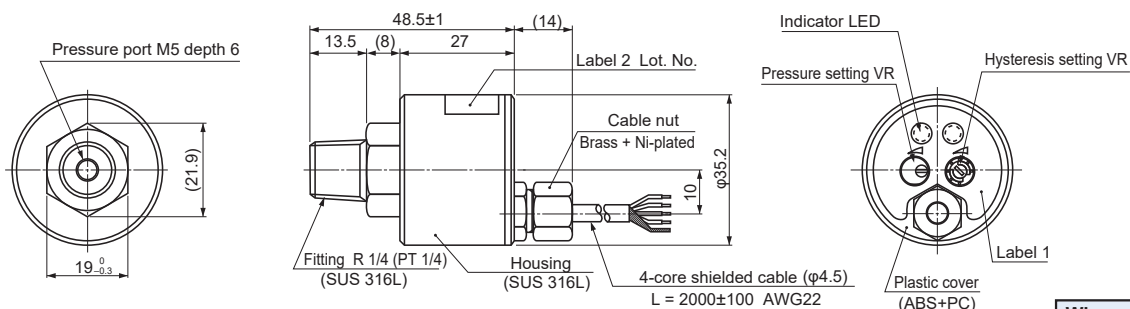


Wire color	Connection
Brown	Power ⊕
White	Analog output
Black	Switch output
Blue	Common
Shield	Fitting

Configurations of joint GF (G 3/8) type

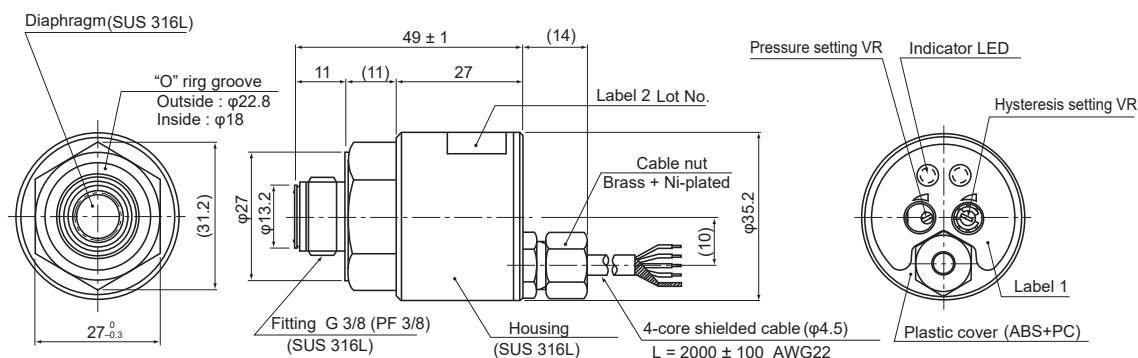

⚠ Extra care should be taken with the diaphragm part. Do not touch the diaphragm directly to avoid damaging the diaphragm.

Configurations of joint G2 (G 1/4) type

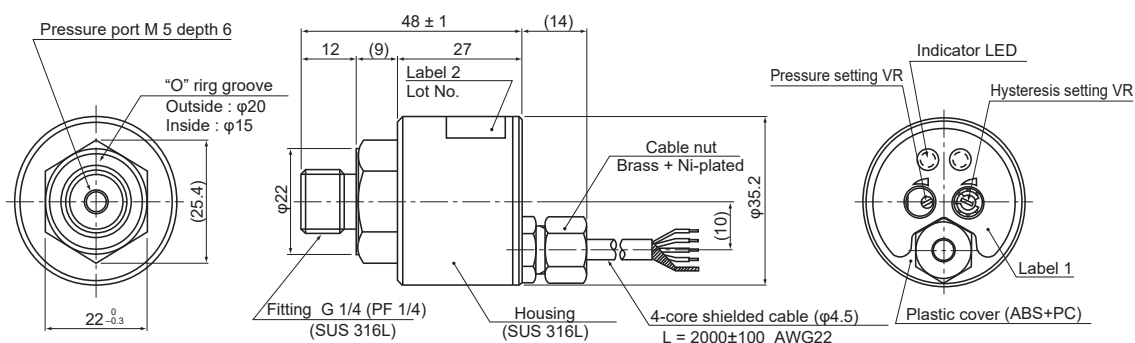


PA-850


PRESSURE TRANSDUCERS WITH AMP.

INTERNAL ELECTRICAL SCHEMATICS

NPN output

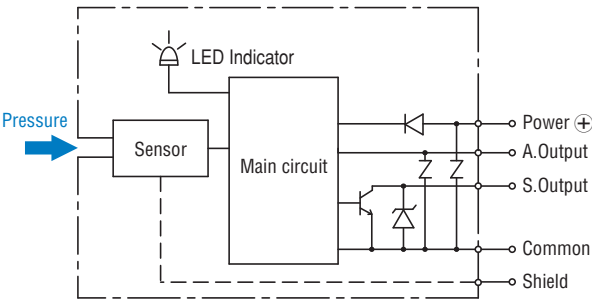


PNP output

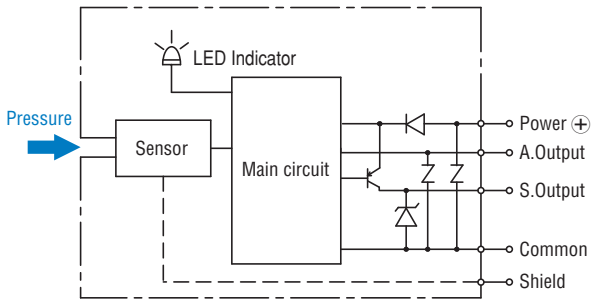


SWITCH OUTPUT SCHEMATICS

Turns on at the set pressure and turns off at the set pressure minus the hysteresis.


PA-850- * * * G

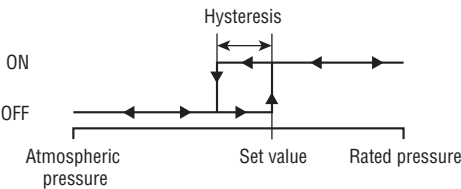


PA-850-102V

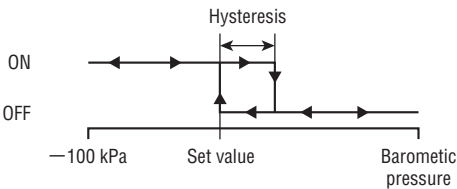

PA-850- * * * R

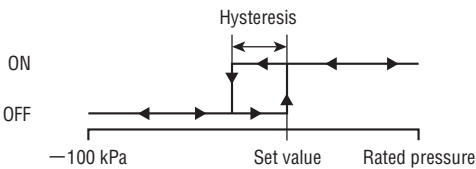

PA-850- * * * A

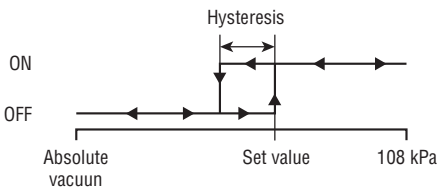

※ Adjustable hysteresis

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nidec:

[PA-850-102A-NGF](#) [PA-850-102A-PGF](#) [PA-850-102R-NG2](#) [PA-850-102R-NGF](#) [PA-850-102R-NR2](#) [PA-850-102R-PG2](#) [PA-850-302R-PGF](#) [PA-850-302R-PR2](#) [PA-850-102V-PGF](#) [PA-850-102V-PR2](#) [PA-850-302R-NG2](#) [PA-850-302R-NGF](#) [PA-850-302R-NR2](#) [PA-850-302R-PG2](#) [PA-850-102R-PGF](#) [PA-850-102R-PR2](#) [PA-850-102V-NG2](#) [PA-850-102V-NGF](#) [PA-850-102V-NR2](#) [PA-850-102V-PG2](#) [PA-850-102A-NR2](#) [PA-850-102A-NG2](#) [PA-850-102A-PG2](#) [PA-850-102A-PR2](#) [PA-850-102G-NG2](#) [PA-850-102G-NGF](#) [PA-850-102G-NR2](#) [PA-850-102G-PG2](#) [PA-850-102G-PGF](#) [PA-850-102G-PR2](#) [PA-850-103G-PG2](#) [PA-850-103G-PGF](#) [PA-850-103G-PR2](#) [PA-850-352G-NG2](#) [PA-850-352G-NGF](#) [PA-850-352G-NR2](#) [PA-850-352G-PG2](#) [PA-850-352G-PGF](#) [PA-850-352G-PR2](#) [PA-850-103G-NR2](#) [PA-850-103G-NGF](#) [PA-850-103G-NG2](#)