



The DBA6927C1 dipole blade is an omnidirectional antenna highly suited as a broadband solution for wireless devices that are configurable for multiple communication protocol applications. Those protocols include the domestic Cellular/PCS/AWS/MDS, WiMax 2100/2300/2500/2600, and global GSM900/GSM1800/UMTS/LTE2600 bands.

The antenna is provided with an articulating 90-degree arm that can be positioned to provide optimal coverage for indoor wireless solutions.

FEATURES AND BENEFITS

- Low profile blade style sheath
- Applicable for both 3G and 4G solutions
- Domestic LTE 700 and global LTE 2600 bands
- Domestic cellular and global GSM
- WiMax 2100/2300/2500/2600
- Conformance to RoHS
- Complete cellular and 3G/4G
- Articulating arm that allows antenna positioning to provide maximal coverage

APPLICATIONS

- Wireless access points
- Wireless routers
- M2M devices

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	698-806 824-894 880-960	1710-1880 1850-1990 1920-2170	2100-2500 2500-2690
Gain (dBi)	0.5		2.2
Efficiency (%)	55		73
VSWR – Avg	<2.5:1		
Nominal Impedance (Ohms)	50		
Max Power - Ambient 25°C (W)	3		
Polarization	Linear		

MECHANICAL SPECIFICATIONS

Dimensions – mm (inches)	229.0 x 30.5 x 15.0 (9.02 x 1.2 x 0.59)
Weight – kg (oz.)	49 (1.73)
RF Connector	See model table
Radome Material	Black

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature – °C (°F)	-35 to +70°C (-31 to +158°F)
Material Substance Compliance	RoHS

CONFIGURATION


PART NUMBER	CONNECTOR	BLADE ANGLE
DBA6927C1-FTNCM	TNC – Male	90 deg.
DBA6927C2-FTNCM	TNC – Male	0 deg.
DBA6927C1-FRNCM	R/P TNC – Male	90 deg.
DBA6927C2-FRNCM	R/P TNC – Male	0 deg.
DBA6927C1-FSMAM	SMA Male	90 deg.
DBA6927C1-FSMAF	SMA Female	90 deg.

RADIATION PATTERNS


698 MHz

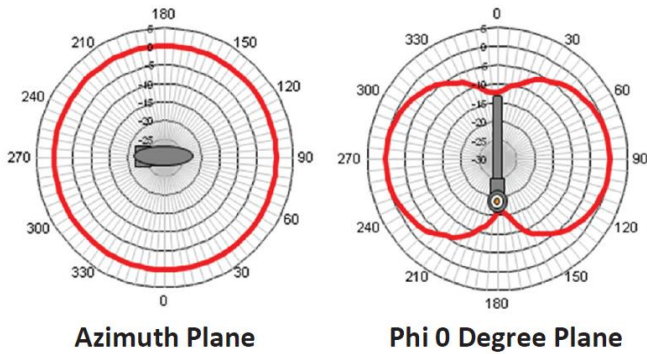


824 MHz

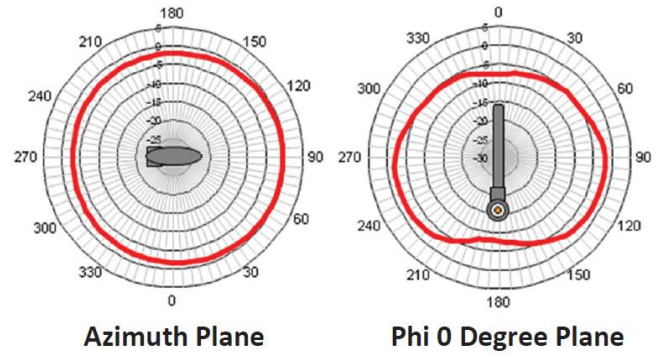


880 MHz

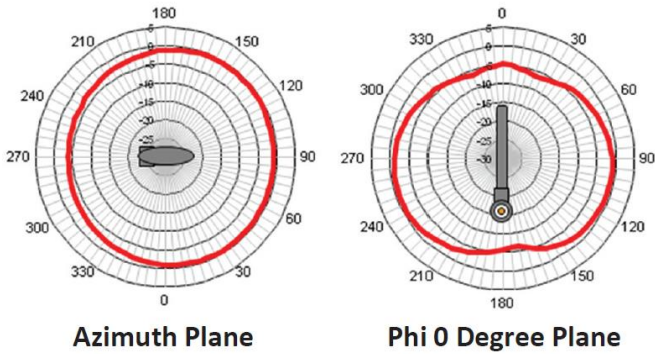


960 MHz

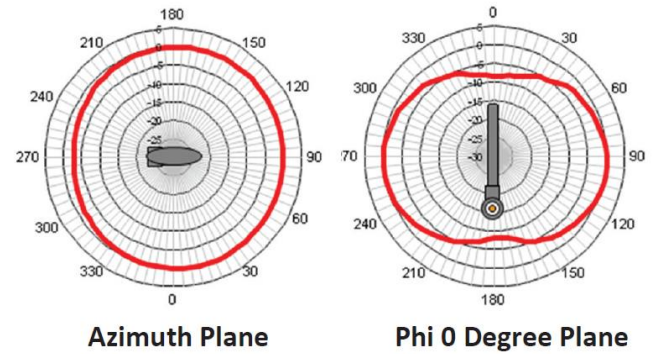

1710 MHz

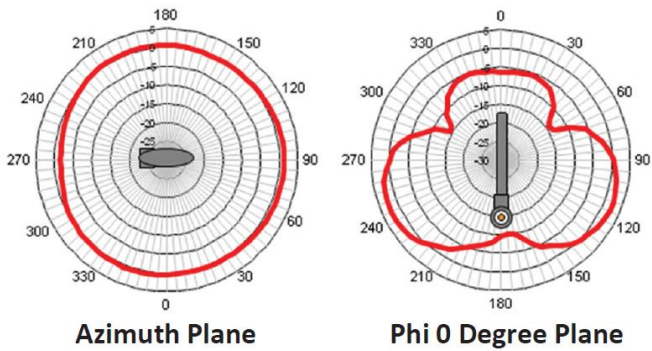


1880 MHz

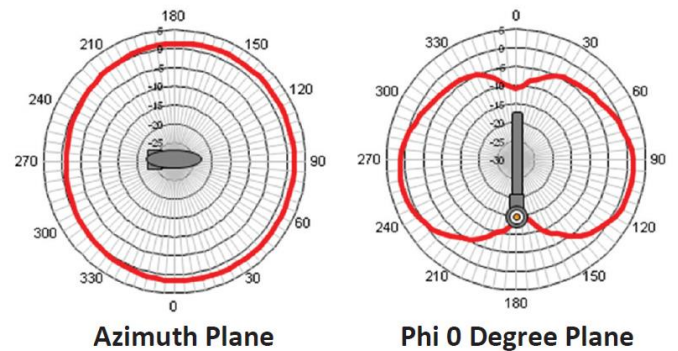


RADIATION PATTERNS


2170 MHz

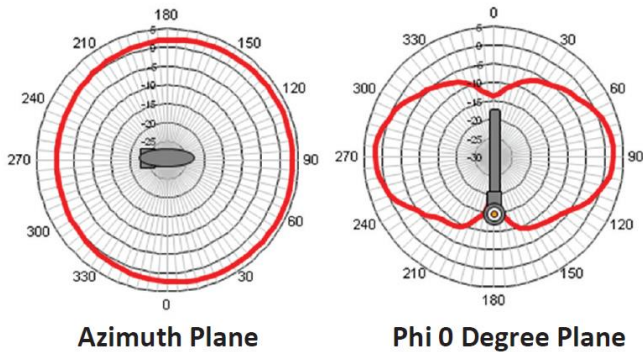


2400 MHz

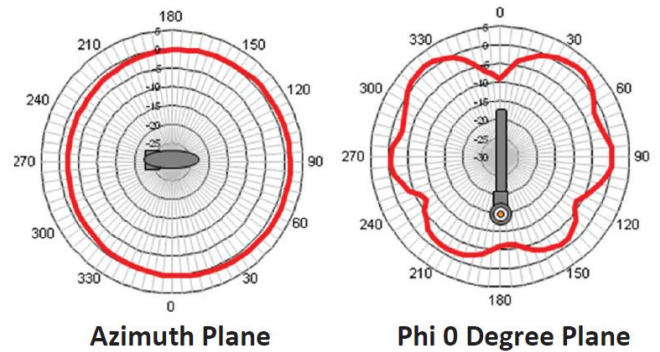

2500 MHz

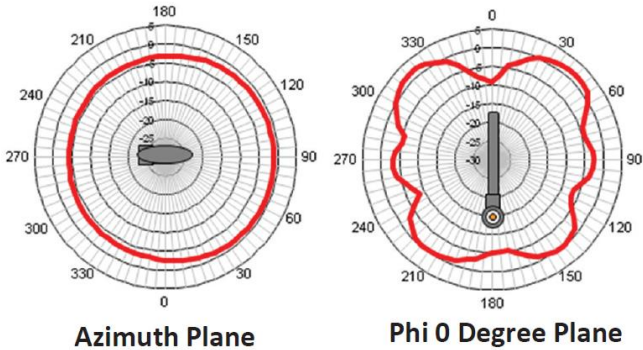

2700 MHz

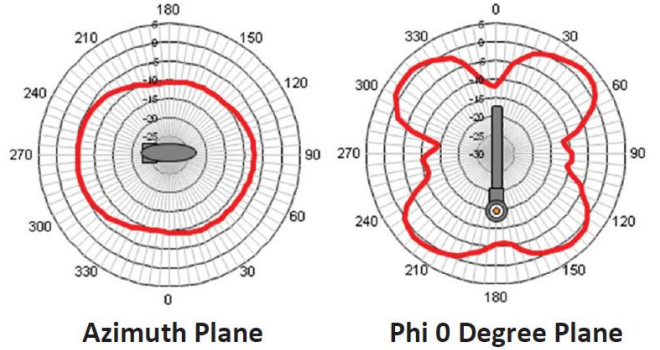

Americas: +1.847.839.6925
IAS-AmericasSales@lairdtech.com
Europe: +44.1628.858941
IAS-EUSales@lairdtech.com
Asia: IAS-AsiaSales@lairdtech.com
Middle East and Africa: +44.1628.858941
IAS-MEASales@lairdtech.com
<https://connectivity.lairdtech.com>



Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Laird Connectivity:

[DBA6927C1-FSMAM](#) [DBA6927C1-FTNCM](#) [DBA6927C1-FSMAF](#) [DBA6927C2-FTNCM](#)