



Specification For Approval

Customer : _____
Description : _____ EC FAN _____
Customer Part No. : _____ Rev : _____
Delta Model No. : _____ GTB019FUG09R-V E1 _____ Rev : 06
Safety Model No. : _____ GTB019FUG09R-V _____
Sample Issue No. : _____
Sample Issue Date : _____ 02/14'23 _____

Please send one copy of this specification back after
you signed approval for production pre-arrangement

Approved by : _____

Date : _____

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,
Taoyuan City, 33341, Taiwan

TEL : +886-3-359-1968

FAX : +886-3-359-1991

Electronically Commutated (EC) Fan

Centrifugal Fan

Ø 190 x 87.5 mm



Delta Electronics, Inc.
No.252, Shangying Road, Guishan
Industrial Zone, Taoyuan City, 33341,
Taiwan
TEL: +886-3-359-1968
FAX: +886-3-359-1991
www.deltaww.com



Technical features


Input Side	
Nominal Voltage	1~ 230Vac 50/60Hz
Input Source	1~ 200Vac - 240Vac
Power @ Free air	172 W
Power @ Max. load	175 W
Output Side	
Speed (RPM)	4150
Qmax. (CMH / CFM)	997 / 587
Pmax. (Pa / inAq)	988 / 3.97
Noise (dB-A) @ Qmax.	76.5
Functions	
Control input 0-10VDC / PWM pattern.	
Output +10VDC (±10%), max. 5mA.	
Locked rotor protection, Soft start.	

NOTE: Delta reserves the right to change specifications and other product information without prior notice.

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Plastic / Aluminum
Bearing system	Ball bearings
Weight (kg)	1.2
Electrical leads	Lead wire
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +80 °C
Environment Class	ISO 12944-2 C2
Safety	
Safety	UL; cUL; TUV; CE
IP Level	IP54
EMC	EN61000-6-1/3
Protection class	I
Insulation class	B
Leakage current	≤ 3.5 mA
Motor protection	Over temperature protected
Life expectancy	60,000 hrs at 40 °C / 15 ~ 65 %RH

(1) Base on installation conditions, ferrite core maybe required on the connection line for the application.

P & Q curves

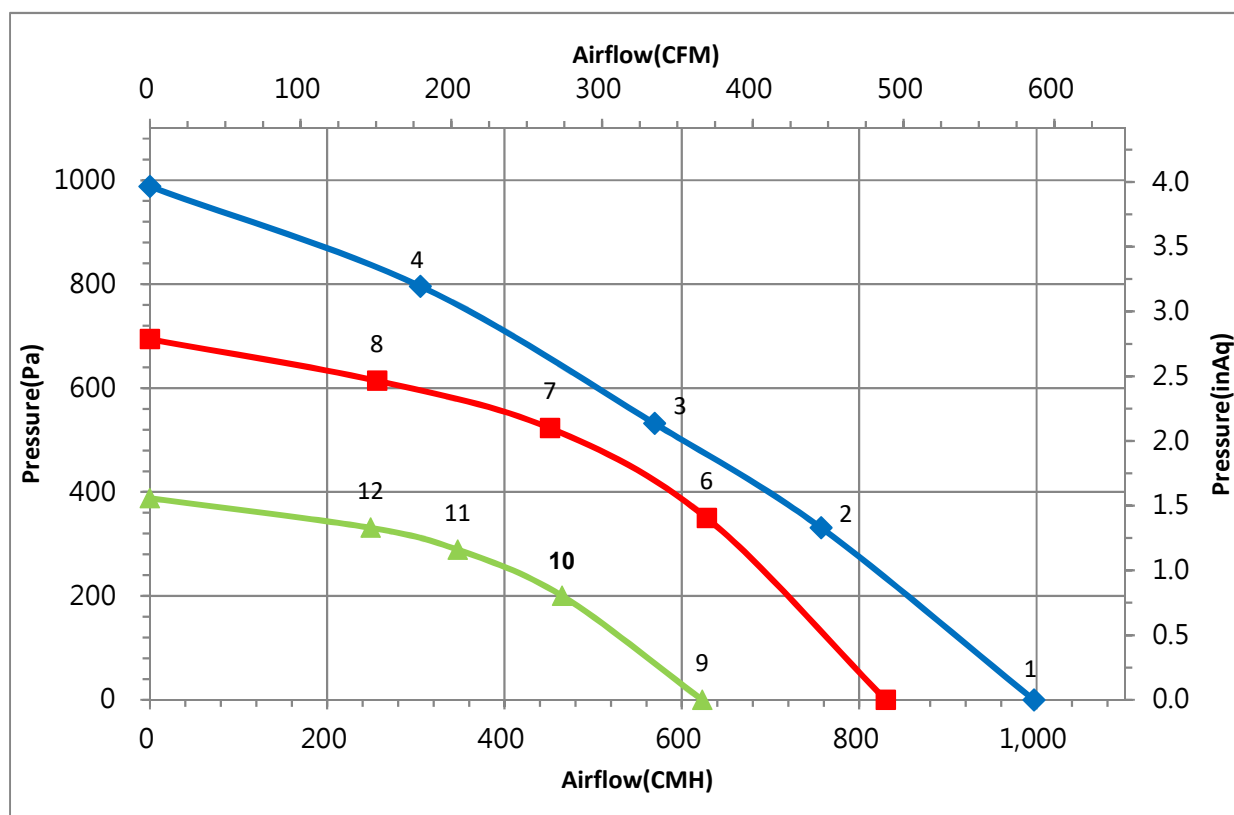

Measure data:

	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	997	4612	172	1.13	76.5
2	331	757	4277	175	1.14	72.5
*3	532	569	4146	175	1.14	71.0
4	796	305	4403	175	1.15	75.5
5	0	830	3847	103	0.71	73.5
6	350	628	3853	137	0.92	70.0
7	523	451	3854	138	0.93	71.5
8	614	256	3859	118	0.81	72.0
9	0	623	2907	47	0.36	67.0
10	200	465	2904	60	0.44	63.5
11	289	347	2900	63	0.45	63.0
12	331	249	2907	56	0.42	65.5

Test Condition :

- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side
- Testing method is compliance with ISO 3745.


ErP Directive:

	Actual	2015
Over all Eff (%)	54.5	43.5
Eff Grade N	73.0	62.0
Power (kW)	0.175	
Air flow (CMH)	569	
Pressure (Pa)	532	
Speed (RPM)	4150	

Label :



Fan :

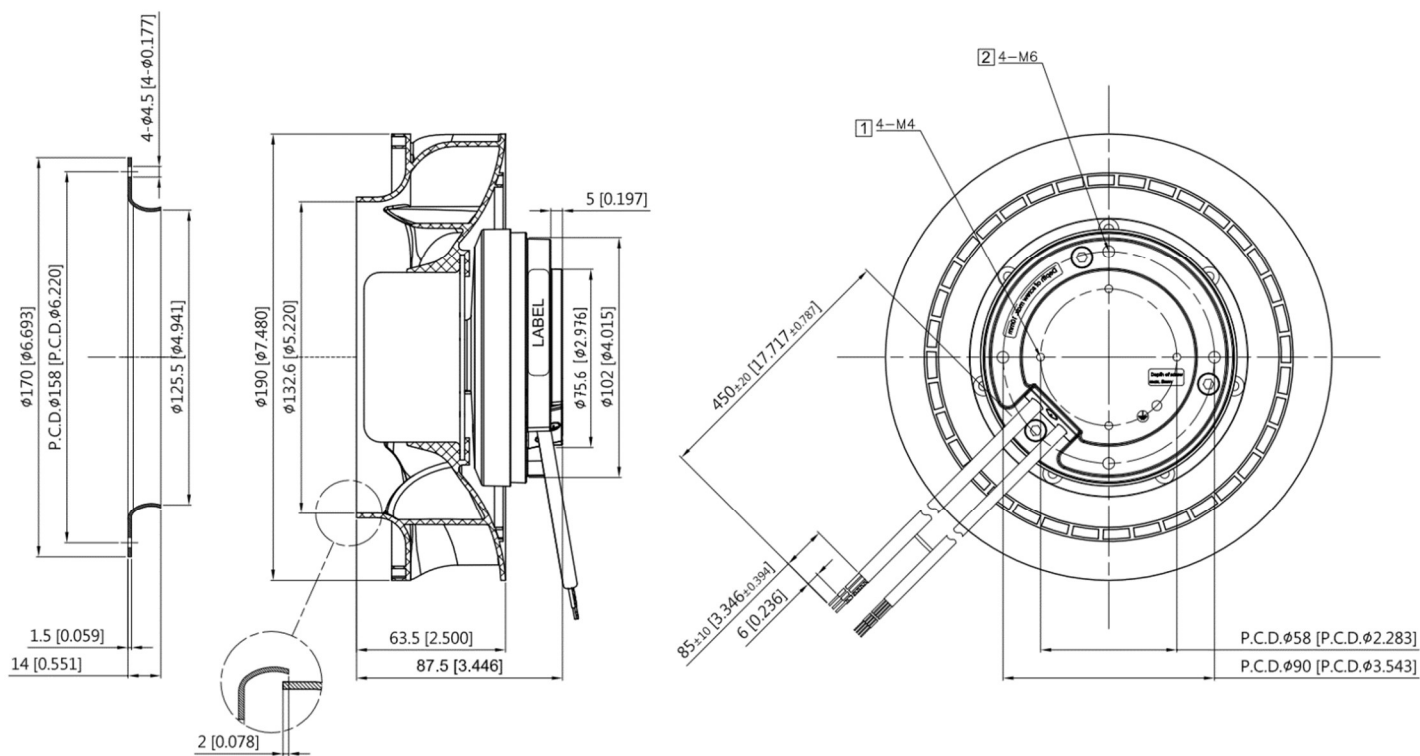


UNIT : mm[INCH]

Note :


1. Depth of screw: 5mm (max.).
2. Depth of screw: 10mm (max.).



Definition of terminal block

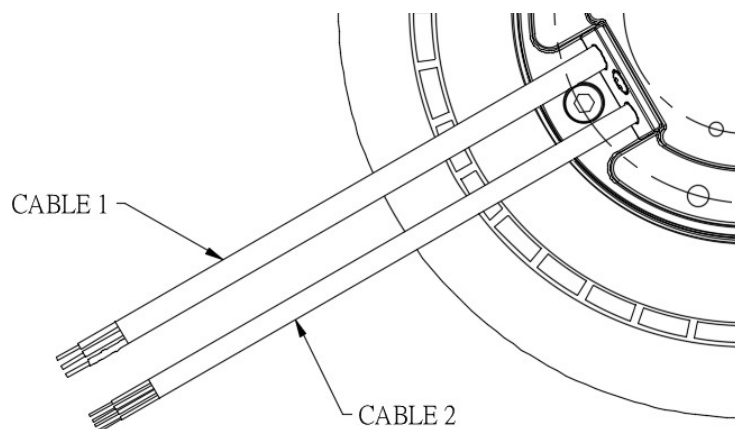


Cable	Wire Type	Color	Functions
1	UL2464 18#AWG	Brown	Line/ AC main
		Blue	Neutral/AC main
		Green / Yellow	Protective Earth
2	UL2464 24#AWG	Green	Ground
		Red	+10V output
		White	F00
		Yellow	0-10VDC / PWM


Lead wire connection:

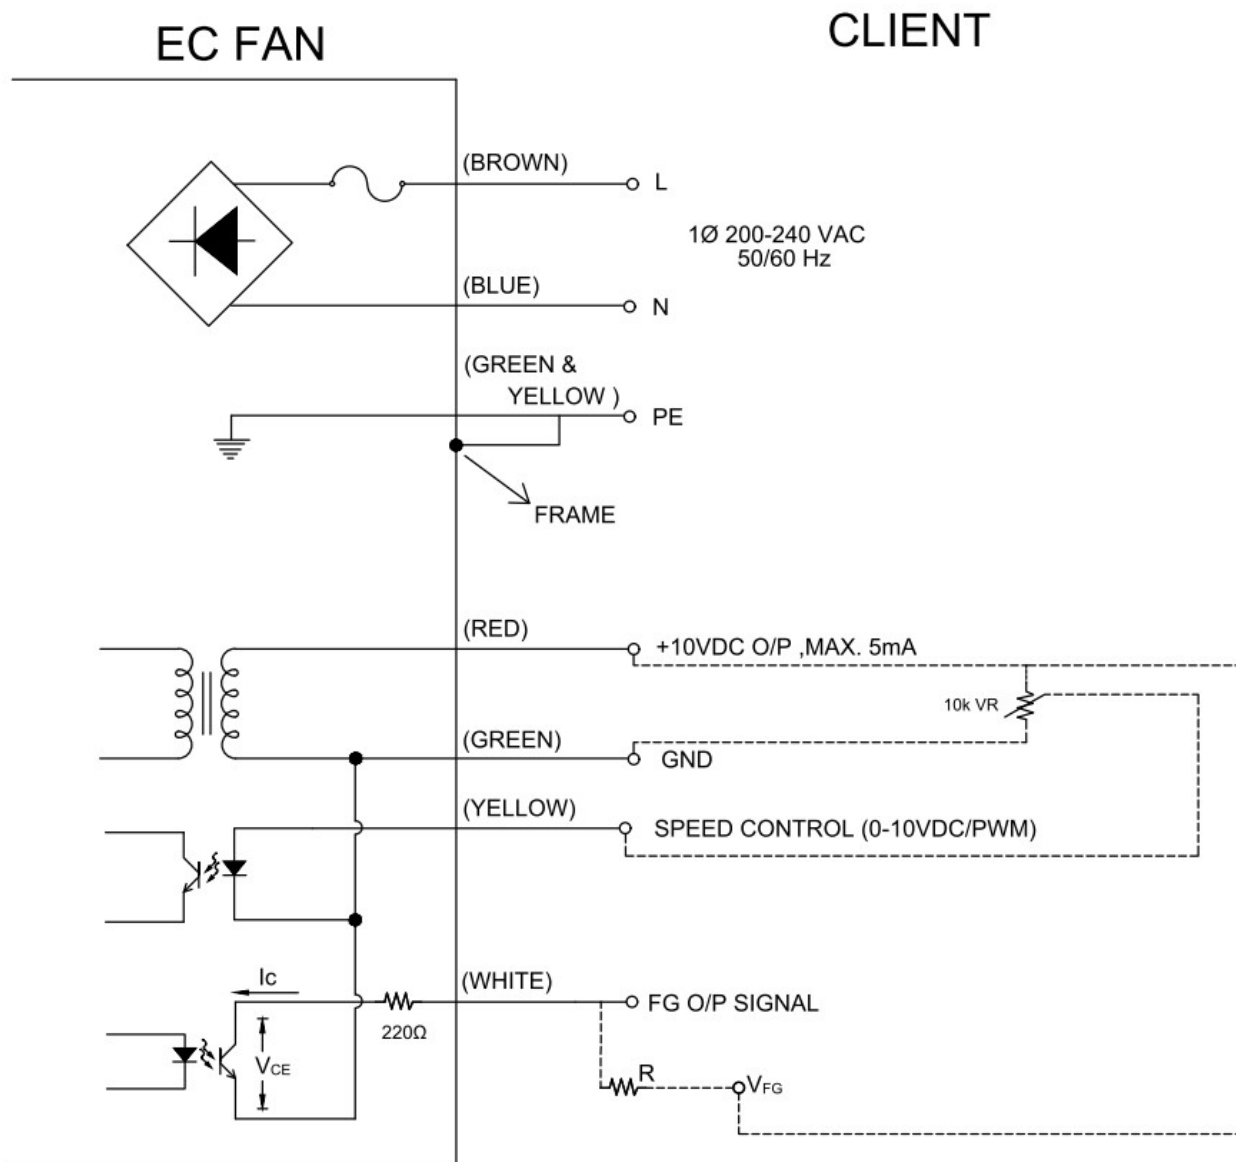

Speed setting	
Full Speed 	Short RED & YELLOW Fan will run full speed.
Voltage Control 0-10V DC Source 	Use voltage source support 0~10VDC voltage DC+ : connect to YELLOW DC- : connect to GREEN -Voltage higher than 1.0 VDC, fan start up. -Voltage lower than 0.5 VDC , fan stop
PWM Control PWM Generator 	PWM duty control PWM amplitude is 10VDC(+/-5%) Frequency Range is 100Hz ~ 100kHz -PWM duty higher than 10%, fan start up ° -PWM duty lower than 5%, fan stop °

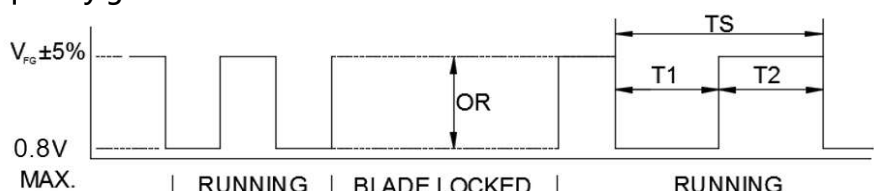Signal function		
Voltage/PWM control	The speed comparison will control level.	
	Voltage (V)	PWM(%)
	0	0
	10	99
		4150 ⁽¹⁾ ± 5%
	(1) Reference point 3 ^(*) in P&Q curve page.	
FG	$V_{CE(sat)} = 0.8V \text{ MAX.}$ $I_C = 5mA \text{ MAX.}$ $V_{FG} = 30.0V \text{ MAX.}$ $R \geq V_{FG} / I_C$ Frequency generator waveform  $N=R.P.M$ $TS=60/N(SEC)$ 1 PULSE PER REVOLUTION $T1=T2=1/2 TS$	

Control Voltage VS. RPM Curve

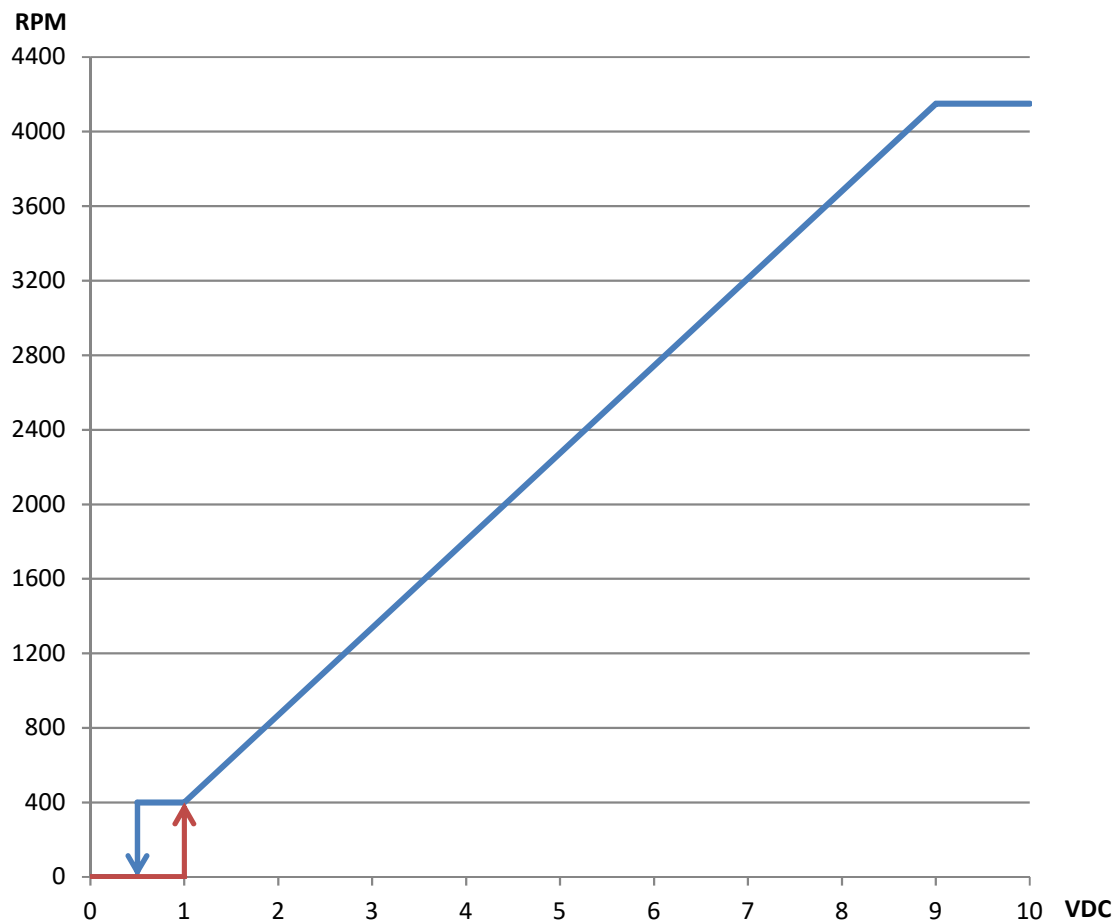

Voltage (VDC), PWM duty (%) table

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%

Note: If the fan is used on heavy load, the speed will be limited by power consumption.