

#### AANI-CH-0133

Request Samples



Check Inventory (>)



1.6 x 0.8 x 0.4 mm RoHS/RoHS II Compliant MSL Level = 1


#### **Features**

- Miniaturized in Size: 1.6 x 0.8 x 0.4 mm
- Low Return Loss of: < -9.3 dB
- Peak Gain: 1.1 dBi
- Average Total Efficiency: -3.1 dB (49%)
- Surface Mount (SMD)
- Integration: PCB Corner Mounting

## **Applications**

- Bluetooth®/ ZigBee® / Thread/ Matter/Wi-Fi®
- Bluetooth®/ Wi-Fi® Modules
- Consumer Hearables & Wearables
- Medical Wearables & Tele-Medicine
- Smart Home & Smart Building
- Asset Tracking & Telematics
- Smart Metering
- Intelligent Lighting
- Wireless Remote Control

### **Product Image**







#### AANI-CH-0133

Request Samples (>)



Check Inventory (>)



1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

## **Electrical Specification**

Parameter	Specification	Unit
Operating Frequency Range	2400 - 2500	MHz
Return Loss	<-9.3	dB
VSWR	< 2.0	:1
Polarization	Linear	-
Peak Gain	1.1	dBi
Minimum Total Efficiency	-3.7 (43)	dB (%)
Average Total Efficiency	-3.1 (49)	dB (%)
Maximum Total Efficiency	-2.9 (52)	dB (%)
Impedance	50	Ω
Radiation Pattern	Omni-directional	-
Input Power	< 2	W

Note: All measurements were performed using the evaluation board in a free-space environment. Actual performance may vary depending on factors such as the ground plane, specific application, and surrounding environment.

## **Mechanical Specification**

Parameter	Specification		
Antenna Dimension	1.6 x 0.8 x 0.4 mm		
Evaluation board Dimension	46 x 20 mm		
Recommended Ground Clearance for Antenna	5.0 x 3.0 mm		
Mounting Type	Surface Mount		
Mounting Location	PCB Corner Mounting		
Material(s)	Ceramic		

## **Environmental Specification**

Parameter	Specification	
Operating and Storage Temperature (individual chip without packing)	-40°C ~ +85°C	
Packaging Storage Temperature	-10°C ~ +40°C	
Packaging Storage Relative Humidity	70% (Max.)	

## **Ordering Information**

Part Number	Description
AANI-CH-0133	Antenna Component on Cut Tape
AANI-CH-0133-T	Antenna Component on Tape & Reel
AANI-CH-0133-EVB	Evaluation Kit





#### AANI-CH-0133

Request Samples (>)




Check Inventory (>)





1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1


## **Product Dimensions and Terminal Configuration**

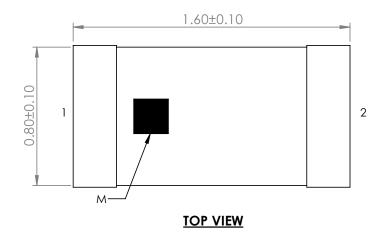

Pin #	Function			
1	Feeding Point			
2	NC			
М	MARK			



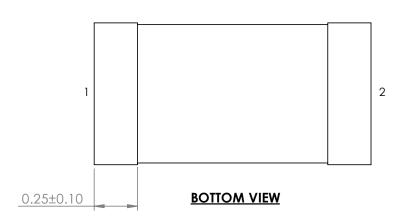



Unit: mm





AANI-CH-0133

Request Samples




Check Inventory (>)




1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

### **Recommended PCB layout**

If there are several layers in the PCB, there is an advantage to add vias for smooth interconnection of the ground areas to avoid splits in the ground plane. It is also important that the ground clearance is respected through all layers of the PCB. It is recommended to implement a matching network to optimize the antenna impedance in your application.

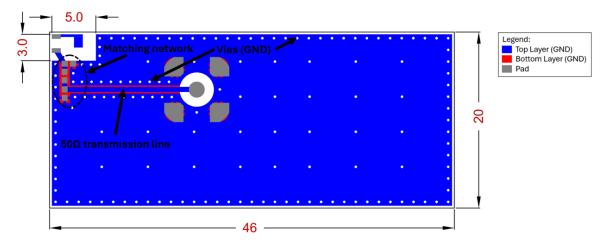

Detailed view of antenna footprint and copper clearance:

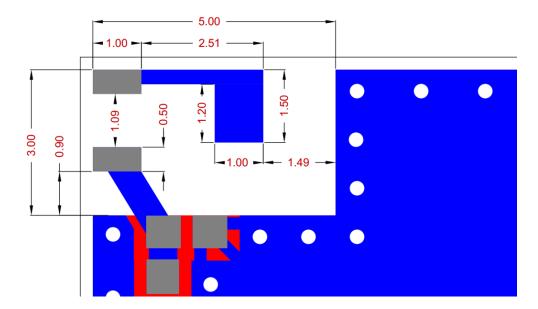

Unit: mm

#### **Transmission Line**

The transmission line should be kept as short as possible and be designed to have a characteristic impedance of  $50\Omega$ . Abracon recommends using a Co-Planar Waveguide with Ground (CPWG), which dimensions can be derived by any trusted calculator, using the correct input for PCB materials and layer stack-up.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISION I.R: 03-07-25** 

ABRACON IS ISO9001-2015 CERTIFIED



#### AANI-CH-0133

Request Samples (>)




Check Inventory (>)




1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

## **Measurement Setup**

The radiation measurements were all done in an anechoic chamber with the antenna implemented on its evaluation board (Abracon AANI-CH-0133-EVB) that has a PCB size of 46 x 20 mm:

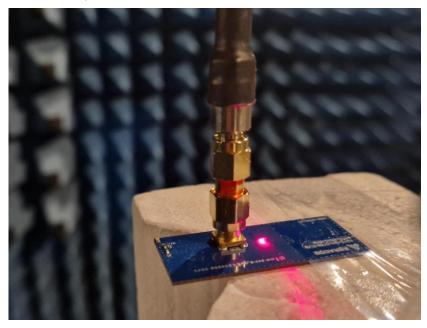

#### **Reflection Characteristics – Return Loss**

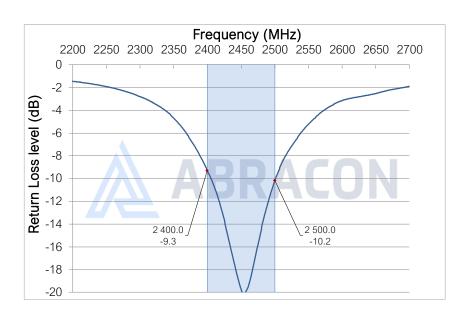





#### AANI-CH-0133

Request Samples




Check Inventory




1.6 x 0.8 x 0.4 mm RoHS/RoHS II Compliant MSL Level = 1

## Radiation Characteristics - Total Efficiency (dB)

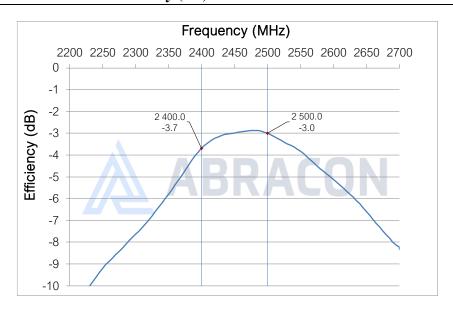

## **Radiation Characteristics – Total Efficiency (%)**

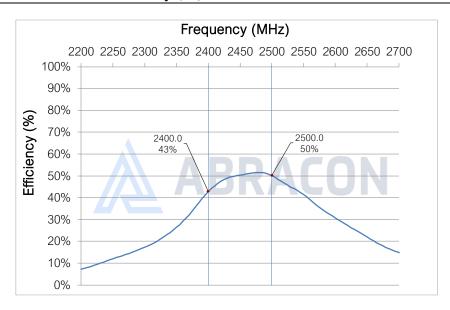





#### AANI-CH-0133

Request Samples




Check Inventory (>)




1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

### **Radiation Characteristics – Maximum Gain**

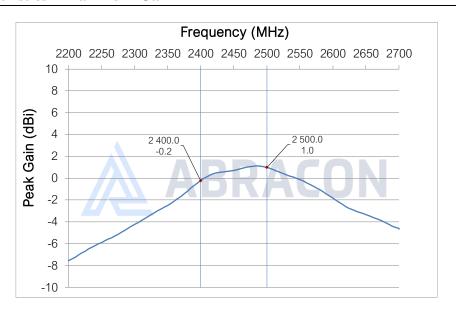

### Radiation Characteristics - 3D Pattern @ 2450 MHz

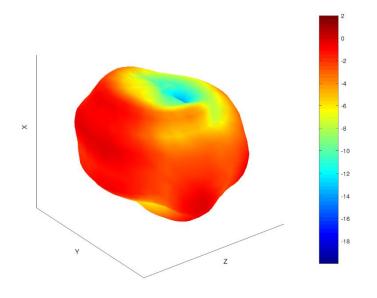



Unit: dBi



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISION I.R: 03-07-25** 

ABRACON IS ISO9001-2015 CERTIFIED



#### AANI-CH-0133

Request Samples (>)





Check Inventory (>)




1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

## Radiation Characteristics - 2D Pattern @ 2450 MHz








VP: Vertical Polarization HP: Horizontal Polarization







Unit: dBi



**XZ-plane:** 

YZ-plane:



#### AANI-CH-0133

Request Samples




Check Inventory



1.6 x 0.8 x 0.4 mm RoHS/RoHS II Compliant MSL Level = 1


### **Evaluation Board Outline & Matching Circuit**

The evaluation board (Abracon AANI-CH-0133-EVB) is developed to simplify antenna testing and evaluation. It has an arbitrary size of 46 x 20 mm and includes an SMA connector. The purpose is to give a reference design for an optimal antenna implementation. The evaluation board can also be used to test other implementations by cutting and soldering the PCB into any device.

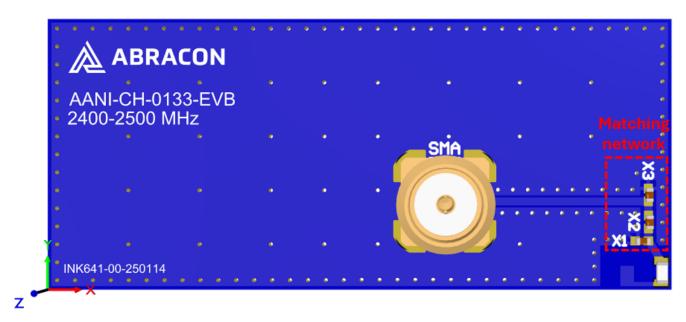

The evaluation board has a matching circuit implemented next to the antenna. This is aimed to enable optimization possibilities for the user. The component positions are sized for 0402 (1005 metric) SMD components.

The antenna requires a matching circuit to fine-tune the resonant frequency and achieve optimal balance. The evaluation board is pre-tuned for optimal performance in the 2.4–2.5 GHz range using the components listed below (equivalents may be used):

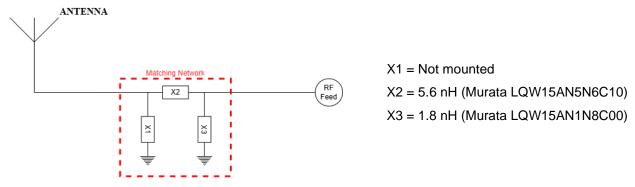

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.





AANI-CH-0133

Request Samples



Check Inventory




1.6 x 0.8 x 0.4 mm RoHS/RoHS II Compliant MSL Level = 1

#### **General Implementation Guidelines**

The antenna can be positioned in different ways, although there are some positions which are more beneficial. The illustration below shows a typical PCB with examples on two different antenna positions:

- The optimal position is usually option 1 or 2
- The antenna must be placed along the PCB edge, i.e., it cannot be placed in the middle (see "N/A").





The rectangular copper cutout in the footprint must extend through all layers of the PCB stack-up, ensuring there is **no copper on any layer in this area**. Additionally, a robust via structure around the cutout and along the edge of the ground plane is highly recommended for optimal performance.

It is important to note that plastic and metal parts in close proximity to antennas may significantly affect antenna tuning and performance. For instance, a plastic housing above the antenna often causes the resonant frequency to shift downward. Since such effects are challenging to predict without detailed design information, it is recommended to measure the antenna performance in the final device after implementation. To compensate for potential frequency shifts, implementing a matching network on the antenna feed is advisable.

Another general consideration for surface-mounted antennas relates to PCB population. Electrical components placed near the antenna may impact its tuning and radiation performance. To mitigate this, components in the surrounding area should be positioned below a topographical slope. This slope should begin at the PCB level near the antenna's designated keep-out zone and gradually increase in height as distance from the antenna grows.

For technical assistance, please contact Abracon online support through our online support platform.





#### AANI-CH-0133

Request Samples (>)



Check Inventory (>)



1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

### **Reflow Profile [JEDEC J-STD-020]**

Solder paste: Sn/3.0Ag/0.5Cu




Table 1

SnPb Eutectic Process Classification Temperatures (T <sub>c</sub> )					
Package Volume mm³ Volume mm³  Thickness <350 ≥350					
<2.5mm	235°C	220°C			
≧2.5mm	220°C	220°C			

Table 2

Pb-Free Process Classification Temperatures (T <sub>c</sub> )							
Package         Volume mm³         Volume mm³         Volume mm³           Thickness         <350         350-2000         >2000							
<1.6mm	260°C	260°C	260°C				
1.6mm - 2.5mm	260°C	250°C	245°C				
>2.5mm	250°C	245°C	245°C				

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T <sub>smin</sub> )	100°C	150°C
Temperature maximum (T <sub>smax</sub> )	150°C	200°C
Time $(T_{smin} \text{ to } T_{smax}) (t_s)$	60 – 120 sec.	60 – 90 sec.
Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )	3°C/sec. max	3°C/sec. max
Liquidous temperature (T <sub>L</sub> )	183°C	217°C
Time at Liquidous (T <sub>L</sub> )	60 – 150 sec.	60 – 150 sec.
Peak package body temperature (T <sub>p</sub> )*	See Table 1	See Table 2
Time $(T_p)^{**}$ within 5°C of the specified classification temperature $(T_c)$	20 sec.	10 sec.
Ramp-down rate (T <sub>p</sub> to T <sub>smax</sub> )	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

<sup>\*</sup>Tolerance for peak profile temperature (Tp) is defined as a supplier minimum and a user maximum.



<sup>\*\*</sup>Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum.



#### AANI-CH-0133

Request Samples (>)




Check Inventory (>)



1.6 x 0.8 x 0.4 mm **RoHS/RoHS II Compliant** MSL Level = 1

## **Packaging**

#### Tape & Reel dimensions:

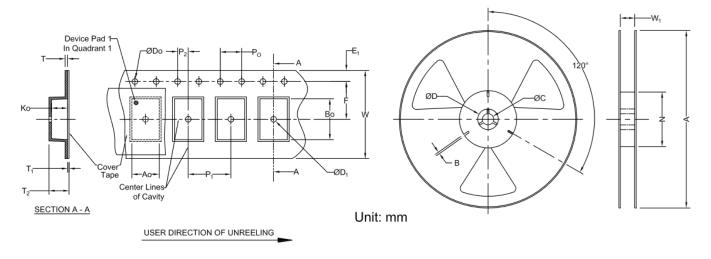

Carrier Tape Specifications (mm)									
Do         K <sub>0</sub> E <sub>1</sub> P <sub>0</sub> F         P <sub>1</sub> W         A <sub>0</sub> B <sub>0</sub> Reel Qty							Reel Qty		
1.50 + 0.1	0.5 ± 0.1	1.75 ± 0.1	8.0 ± 0.1	$3.5 \pm 0.05$	4.0 ± 0.1	8.0 ± 0.3	1.0± 0.1	1.8± 0.1	4,000

Reel Specifications (mm)						
A W <sub>1</sub> N B C						
178 ± 2.0	10 ± 1.5	58 ± 2.0	2.45 ± 0.2	13.5 ± 0.2		

ATTENTION: Abracon LLC's products are Commercial-Off-The-Shelf ('COTS'), which are designed, intended, and validated for use in commercial, industrial, and automotive applications. The customer is responsible for testing and verifying the performance of an Abracon solution to meet their system-level requirements.

