

Indicator bank, Harmony XVB, audible unit for modular tower lights, plastic, 70mm, buzzer, continuous or intermitten tone, 70...90dB, 120...230V AC

XVBC9M

① To be discontinued

- (!) To be discontinued on: Jun 30, 2025
- ! To be end-of-service on: Dec 31, 2026

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XVB Universal
Product or Component Type	Indicator bank
Beacon or indicator bank unit type	Audible unit
Mounting diameter	2.8 in (70 mm)
Component name	XVBC
Noise level	7090 dB 1 m
[Us] rated supply voltage	120230 V AC

Complementary

Signalling type	Continuous or intermittent buzzer	
Assembly style	Customer assembly, up to 5 units	
Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm² with cable end	
[Ui] rated insulation voltage	250 V IEC 60947-1	
Nominal voltage limit	0.851.1 Un IEC 60947-5-1	
Current Consumption	< 25 mA	
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1	
Fundamental frequency	2.8 kHz	
CAD overall width	2.8 in (70 mm)	
CAD overall height	2.5 in (63 mm)	
CAD overall depth	2.8 in (70 mm)	
Product Weight	0.40 lb(US) (0.18 kg)	

Environment

Product Certifications	CCC EAC CSA C22-2 No 14 UL 508
Standards	IEC 60947-5-1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Protective treatment	тс
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)
Ambient air temperature for operation	-13122 °F (-2550 °C)
Electrical shock protection class	Class I on support tube IEC 61140 Class II on base unit IEC 61140
IP degree of protection	IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529
NEMA degree of protection	Type 4X UL indoor)

Ordering and shipping details

Category	US100XV22611
Discount Schedule	00XV
GTIN	3389110845976
Returnability	Yes
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.94 in (10.000 cm)
Package 1 Width	3.23 in (8.200 cm)
Package 1 Length	3.15 in (8.000 cm)
Package 1 Weight	6.067 oz (172.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	36
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	15.432 lb(US) (7.000 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	144
Package 3 Height	17.72 in (45.000 cm)
Package 3 Width	23.62 in (60.000 cm)
Package 3 Length	31.50 in (80.000 cm)
Package 3 Weight	80.469 lb(US) (36.500 kg)

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint		
Carbon footprint (kg CO2 eq, Total Life cycle)	173	

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	124e2d7a-5b1e-45ca-b93c-220dd91b55b6
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


XVBC9M

Dimensions Drawings

Indicator Bank without "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get \mathbf{b} dimension.



- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)


Number of illuminated or audible signalling units (no "flash")	b in mm	b in in.
1	138	5.43
2	201	7.91
3	264	10.39
4	327	12.87
5	390	15.35

XVBC9M

Indicator Bank with "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

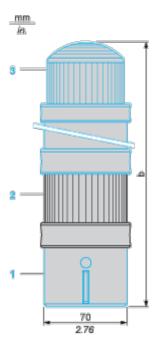

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) "Flash" unit, to be ordered separately

Number of illuminated or audible signalling units other than "flash" tube	b in mm	b in in.
1	295	11.61
2	358	14.09
3	421	16.57
4	484	19.06

XVBC9M


Technical Description

Indicator Bank

Adjustment of Audible Signal

By means of 4 microswitches located in the base of the buzzer:

- 2 switches marked 1 and 2 for selecting continuous or intermittent mode (Hz).
 2 switches marked 3 and 4 for selecting the power (dB) of the audible signal.




Position of microswitches		Setting
1	2	Mode
1	1	continuous: 2.8 kHz
1	0	continuous: 2.8 kHz
0	1	intermittent: 5 Hz
0	0	intermittent: 1 Hz

Position of microswitches		Setting
3	4	Power
1	1	90 dB
0	1	85 dB
1	0	80 dB
0	0	70 dB

Technical Illustration

Dimensions

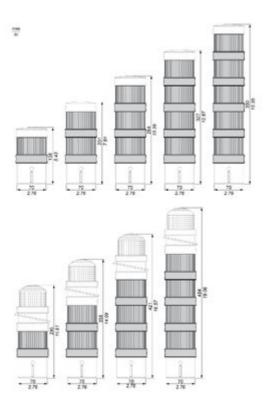


Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony XVB

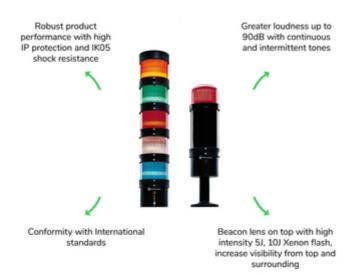

Offer Marketing Illustration

Product benefits / Features



Image of product in real life situation

