

Emergency stop head, Harmony XB5, switching off, plastic, red mushroom 60mm, 22mm, trigger latching push pull

ZB5AX84

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony XB5		
Product or Component Type	Head for emergency stop push-button		
Product destination	Emergency stop push-button		
Device short name	ZB5		
Bezel material	Dark grey plastic		
Head type	Standard		
Mounting diameter	0.9 in (22 mm)		
Sale per indivisible quantity	1		
Shape of signaling unit head	Round		
Type of operator	trigger action and mechanical latching		
Reset	Push-pull		
Operator profile	Red mushroom Ø 60 mm, unmarked		
Device presentation	Basic element		

Complementary

CAD overall width	2.4 in (60 mm)
CAD overall height	2.4 in (60 mm)
CAD overall depth	2.2 in (56 mm)
Product Weight	0.11 lb(US) (0.05 kg)
Mechanical durability	300000 cycles
Station name	XALD 1 cut-out XALK 1 cut-out
Electrical composition code	C7 4 single front mounting C8 4 single and double front mounting C11 3 single front mounting C15 1 single front mounting SF1 3 single front mounting SR1 3 single rear mounting C10 4 single and double front mounting
Compatibility code	ZB5

Environment

Protective treatment	тн
Ambient Air Temperature for	-40158 °F (-4070 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient Air Temperature for Operation	-40158 °F (-4070 °C)			
Overvoltage category	Class II conforming to IEC 60536			
IP degree of protection	IP66 IEC 60529 IP67 IP69 IP69K			
NEMA degree of protection	NEMA 13 NEMA 4X			
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m			
IK degree of protection	IK03 conforming to IEC 50102			
Standards	JIS C8201-5-1 IEC 60947-5-5 IEC 60364-5-53 IEC 60204-1 GB 14048.5 UL 508 IEC 60947-5-4 ISO 13850 CSA C22.2 No 14 IEC 60947-1 IEC 60947-5-1 JIS C8201-1			
Product Certifications	CSA DNV BV LROS (Lloyds register of shipping) UL Listed			
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6			
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27			

Ordering and shipping details

Category	US10CS222467	
Discount Schedule	0CS2	
GTIN	3389119048088	
Returnability	Yes	
Country of origin	CZ	

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	3.54 in (9.0 cm)
Package 1 Width	2.76 in (7.0 cm)
Package 1 Length	2.76 in (7.0 cm)
Package weight(Lbs)	2.2 oz (62.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	11.81 in (30.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	3.472 lb(US) (1.575 kg)

Contractual warranty

Warranty

Aug 30, 2025

18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1
Environmental Disclosure	Product Environmental Profile

Use Better

⊗ Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again


○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No

Product data sheet

ZB5AX84

Dimensions Drawings

Dimensions




ZB5AX84

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

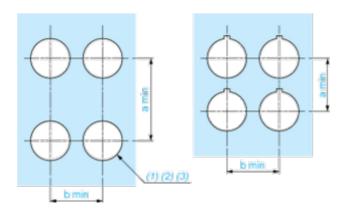

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

				0
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended. (3) \emptyset 22.5 mm recommended (\emptyset 22.3 $_0^{+0.4}$) / \emptyset 0.89 in. recommended (\emptyset 0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

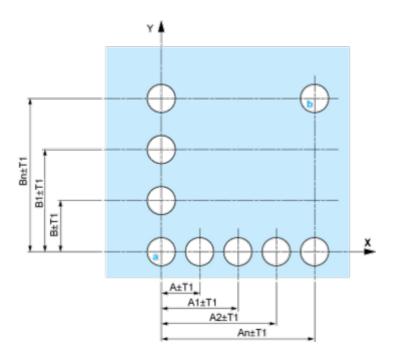

A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

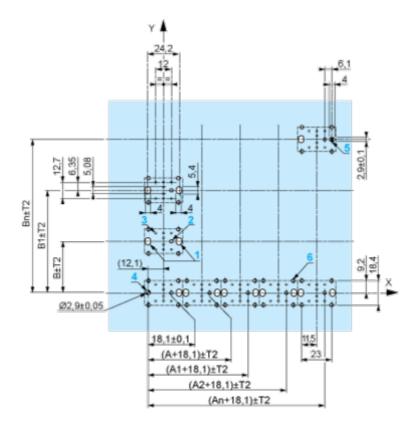

A: 30 mm min. B: 40 mm min. Dimensions in in.

ZB5AX84

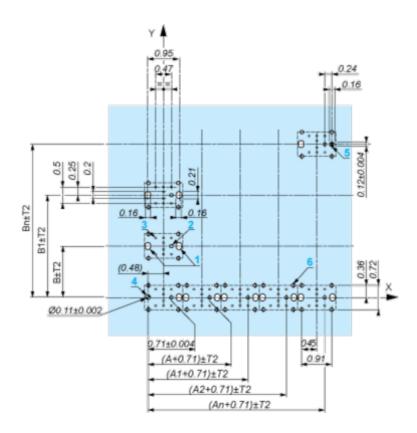

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 °30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked ${\bf a}$ and ${\bf b}$ are diagonally opposed and must align with those marked ${\bf 4}$ and ${\bf 5}$.



Product data sheet

ZB5AX84

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board


Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- $_{\bullet}$ 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01 $\!\!^{\bullet}$
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Code C7



Product data sheet

ZB5AX84

Electrical Compositions Corresponding to Code C8



Electrical Compositions Corresponding to Code C10



Product data sheet

ZB5AX84

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block




Possible location




Technical Illustration

Dimensions

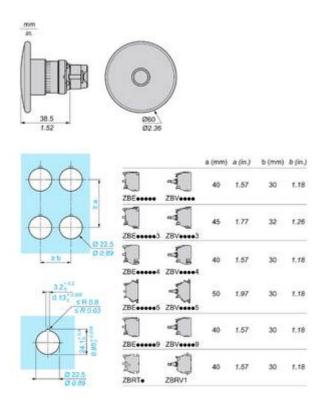


Product benefits / Features

Technical Benefits Harmony XB5 e-stop function

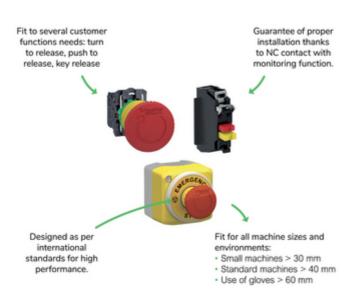

Product benefits / Features

18

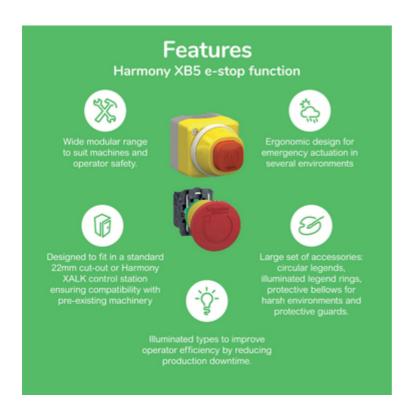

Product benefits / Features

Technical Benefits

Harmony XB5



19

Product benefits / Features

20



Image of product / Alternate images

Alternative











Image of product in real life situation

