

safety module, Modicon TM3, 1 function, Cat 4 PL e, SIL CL3, screw, 24V DC

TM3SAF5R

Main

Range of product	Modicon TM3 Safety	
Product or component type	Safety module	
Device short name	TM3SAF	
Safety module application	For emergency stop and switch monitoring	
Function of module	Emergency stop monitoring 1-channel wiring Emergency stop monitoring 2-channel wiring Monitoring of a movable guard with 2 switches and automatic start	
Safety level	Can reach PL e/category 4 conforming to ISO 13849-1: 2008 Can reach PL e/category 4 conforming to ISO 13849-2: 2012 Can reach SILCL 3 conforming to IEC 62061: 2005 Can reach SIL 3 conforming to IEC 61508: 2010	

Complementary

Safety reliability data	DC = 95 % conforming to ISO 13849-1
	PFHd = 5E-9 1/h conforming to IEC 61508-1 1 operation/hour DC-13 24 V DC, <4 A
	PFHd = 30E-9 1/h conforming to IEC 61508-1 60 operations/hour DC-13 24 V DC,
	MTTFd = 500 years conforming to ISO 13849-1 1 operation/hour DC-13 24 V DC, <4
	A
	MTTFd = 85 years conforming to ISO 13849-1 60 operations/hour DC-13 24 V DC,
	<1 A
	SFF = 95 % conforming to IEC 61508-1
	HFT = 1 conforming to IEC 61508-1
	Type = A conforming to IEC 61508-1

Synchronisation time between inputs

Unlimited

<u> </u>	
Connections - terminals	Captive screw clamp terminals, removable terminal block 1 x 0.21 x 2.5 mm ² flexible without cable end 13-14, 23-24, 33-34
	Captive screw clamp terminals, removable terminal block 1 x 0.21 x 2.5 mm ² solid without cable end 13-14, 23-24, 33-34
	Captive screw clamp terminals, removable terminal block 1 x 0.251 x 2.5 mm²
	flexible with cable end, with bezel 13-14, 23-24, 33-34 Captive screw clamp terminals, removable terminal block 1 x 0.251 x 2.5 mm² flexible with cable end, without bezel 13-14, 23-24, 33-34
	Captive screw clamp terminals, removable terminal block 2 x 0.22 x 1.5 mm²
	flexible without cable end 13-14, 23-24, 33-34 Captive screw clamp terminals, removable terminal block 2 x 0.22 x 1.5 mm² solid
	without cable end 13-14, 23-24, 33-34
	Captive screw clamp terminals, removable terminal block $2 \times 0.252 \times 1 \text{ mm}^2$ flexible with cable end, without bezel 13-14, 23-24, 33-34
	Captive screw clamp terminals, removable terminal block 2 x 0.52 x 1.5 mm ² flexible with cable end, with double bezel 13-14, 23-24, 33-34
	Captive screw clamp terminals, removable terminal block 1 x 0.141 x 1.5 mm²
	flexible without cable end other terminals Captive screw clamp terminals, removable terminal block 1 x 0.141 x 1.5 mm² solid
	without cable end other terminals Captive screw clamp terminals, removable terminal block 1 x 0.251 x 0.5 mm ²
	flexible with cable end, with bezel other terminals Captive screw clamp terminals, removable terminal block 1 x 0.251 x 1.5 mm ²
	flexible with cable end, without bezel other terminals
	Captive screw clamp terminals, removable terminal block 2 x 0.142 x 0.5 mm ² flexible without cable end other terminals
	Captive screw clamp terminals, removable terminal block 2 x 0.142 x 0.75 mm ²
	solid without cable end other terminals Captive screw clamp terminals, removable terminal block 2 x 0.252 x 0.34 mm ²
	flexible with cable end, without bezel other terminals Captive screw clamp terminals, removable terminal block 2 x 0.5 mm² flexible with
	cable end, with double bezel other terminals
Output type	Relay instantaneous opening, 3 NO circuit(s), potential free
Number of safety circuits	3 NO for relay instantaneous opening
Maximum switching voltage	230 V utilisation category AC-15 at 50 Hz (relay instantaneous opening) 24 V utilisation category DC-13 (relay instantaneous opening)
[Us] rated supply voltage	24 V - 1520 % DC
Power consumption in W	0.2 W at 5 V DC 3.6 W at 24 V DC
Input protection type	Internal, electronic
[Uc] control circuit voltage	24 V DC
Maximum cable distance between devices	30 m
Breaking capacity	360 VA holding AC-15 B300 relay output 3600 VA inrush AC-15 B300 relay output
Breaking capacity	4 A 24 V 50 ms DC-13 relay output
Output thermal current	6 A per relay for relay output
[lth] conventional free air thermal current	18 A
Associated fuse rating	4 A gG or gL for relay output conforming to IEC 60947-5-1 6 A fast blow for relay output conforming to IEC 60947-5-1
Minimum output current	10 mA for relay output
Output voltage	10 V relay output
Maximum response time on input open	40 ms
[Ui] rated insulation voltage	300 V (pollution degree 2) conforming to IEC 60647-5-1
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to IEC 60647-5-1
Current consumption	100 mA at 24 V DC external supply
Local signalling	8 LEDs (green/red) for user
Electrical connection	Screw terminal

Standards	ISO 13849-1:2008
	ISO 13849-2:2012
	IEC 62061:2005 IEC 61508:2010
	IEC 60347-5-1:2010
	IEC 61131-2:2007
	IEC 60204-1:2005
	IEC 60204-1:2009/A1
	IEC 61010-1:2010 EN 50581:2012
Product certifications	EAC
	CSA Haz Loc Class 1 Division 2 (pending)
	RCM TÜV
	UL 61010-2-201
	CSA 61010-2-201 (pending)
	ANSI Haz Loc Class 1 Division 2 (pending)
Marking	CE UL
	EFUP 10
	EAC
	RCM
	TÜV CSA
Electromagnetic compatibility	Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to
	IEC 61000-4-2 Electrostatic discharge immunity test - test level: 6 kV (contact discharge) conforming
	to IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80 MHz to 1 GHz)
	conforming to IEC 61000-4-3 Susceptibility to electromagnetic fields - test level: 3 V/m (1.4 GHz2 GHz)
	conforming to IEC 61000-4-3 Susceptibility to electromagnetic fields - test level: 1 V/m (2 GHz3 GHz) conforming
	to IEC 61000-4-3
	Magnetic field at power frequency - test level: 30 A/m (5060 Hz) conforming to IEC 61000-4-8
	Electrical fast transient/burst immunity test - test level: 3 kV (power lines (DC))
	conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 2 kV (I/O) conforming to IEC
	61000-4-4 1.2/50 µs shock waves immunity test - test level: 1 kV (power lines (DC)) conforming
	to IEC 61000-4-5 Conducted RF disturbances - test level: 10 V (0.1580 MHz) conforming to IEC
	61000-4-6 Radiated emission - test level: 40 dBμV/m class A (24 V) conforming to IEC 55011
	Radiated emission - test level: 47 dBµV/m class A (24 V) conforming to IEC 55011
Mounting support	Top hat type TH35-7.5 rail conforming to IEC 60715
	Top hat type TH35-15 rail conforming to IEC 60715 wall mount using attached fasteners
	94 mm
Depth	73 mm
	43.7 mm
Product weight	0.19 kg
Environment	
Standards	IEC 60947-1
	IEC 60947-5-1
	IEC 60204-1 ISO 13850
	EN 1088/ISO 14119
Resistance to electrostatic	8 kV in air conforming to IEC 61000-4-2
discharge	6 kV on contact conforming to IEC 61000-4-2
Resistance to electromagnetic fields	10 V/m 80 MHz1 GHz conforming to IEC 61000-4-3
	3 V/m 1.4 GHz2 GHz conforming to IEC 61000-4-3 1 V/m 2 GHz3 GHz conforming to IEC 61000-4-3

30 A/m 50/60 Hz conforming to IEC 61000-4-8

Resistance to magnetic fields

Resistance to fast transients	3 kV for power lines (DC) (DC) conforming to IEC 61000-4-4 2 kV for I/O lines conforming to IEC 61000-4-4	
Surge withstand	1 kV power lines (DC) differential mode conforming to IEC 61000-4-5 DC 1 kV power lines (DC) common mode conforming to IEC 61000-4-5 DC	
Resistance to conducted disturbances	10 V 0.1580 MHz conforming to IEC 61000-4-6	
Electromagnetic emission	Radiated emissions - test level: 50 dBμV/m class A (24 V DC) at 30230 Hz conforming to IEC 61131-3 Radiated emissions - test level: 57 dBμV/m class A (24 V DC) at 2301000 Hz conforming to IEC 61131-3	
Ambient air temperature for operation	-1055 °C horizontal installation	
Ambient air temperature for storage	-2570 °C	
Relative humidity	1095 %, without condensation (in operation) 1095 %, without condensation (in storage)	
IP degree of protection	IP20 (terminals) conforming to IEC 60529	
Pollution degree	2	
Operating altitude	02000 m	
Storage altitude	03000 m	
Vibration resistance	+/- 3.5 mm (f= 5150 Hz) conforming to IEC 60068-2-6	
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27	
Mechanical robustness	Bumps 6 ms 300 shocks (25 gn) conforming to IEC 60068-2-27	

Packing Units

_	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.500 cm
Package 1 Width	10.600 cm
Package 1 Length	12.500 cm
Package 1 Weight	281.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	18
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	5.461 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint

Environmental Disclosure

Product Environmental Profile

Use Better


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	99cae485-192a-4a91-bc99-8cce8f6405e4
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
PVC free	Yes

Use Again

○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

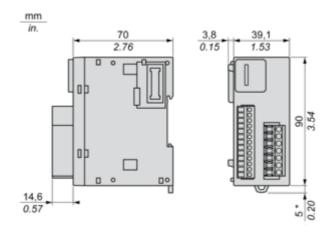


(*) 8.5 mm/0.33 in when the clamp is pulled out.


Product data sheet

TM3SAF5R


Mounting and Clearance

Spacing Requirements







Mounting on a Rail

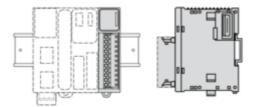

Incorrect Mounting

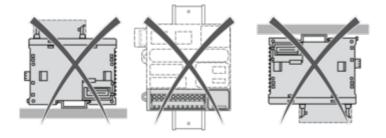


Mounting on a Panel Surface




(1) Install a mounting strip

Mounting Hole Layout

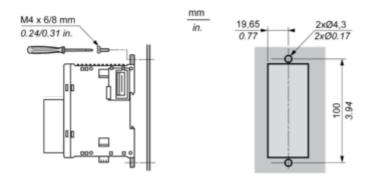


Connections and Schema

Emergency Stop Wiring Diagram

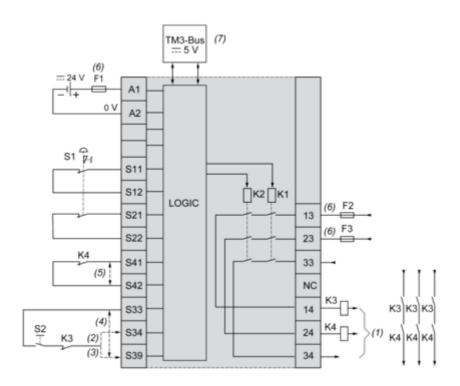

- S1: Emergency stop switch
- S2 : Start switch
- (1) Safety outputs
- (2) Monitored start
- (3) Non-monitored start
- (4) For automatic start, directly connect [S33] and [S39] terminals
- (5) Second external device monitoring channel. Connect [S41] and [S42] terminals if not used
- (6) Fuses. Refer to technical specifications for fuse values
- (7) Non-safety related TM3 Bus communication with logic controller

Protective Guard Wiring



(1) Protective guard

Image of product / Alternate images

Alternative









13

