

# SIGNAL RELAY


## 2 POLES - 2A HIGH INSULATION/WIDE GAP

### FTR-C1 Series

RoHS Compliant

#### ■ FEATURES

- 2 Poles, 2 form C
- Contact gap: More than 0.6mm
- High surge voltage: 2,500V between open contacts  
5,000V between coil & contact
- Complies with Telcordia (former Bellcore) 2nd level surge
- Dielectric strength: 1,500VAC between open contacts  
3,000VAC between coil and contact
- Dimensions of large contact gap relay  
Height: 9.4mm maximum (THT), 9.7mm maximum (SMT)  
Length: 15.2mm maximum  
Width: 7.7mm maximum
- Conforms to IEC60950/ EN60950/UL1950/CSA C 22.2 No. 950 working voltage 250V (supplementary)
- High insulation: Clearance: min 2.0mm (coil and contacts)  
Creepage: min 2.5mm (coil and contacts)
- Low power consumption 280mW (latching type 140mW)
- RoHS Compliant
- Plastic sealed



#### ■ APPLICATIONS

xDSL modems, digital multi-function printers (signal switching), STB (line switching), car navigation (audio switching)

#### ■ PART NUMBERS

[Example] FTR-C1 G A 4.5 G - B05  
(a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-C1 series
(b)	Contact configuration	C : Through hole type G : Surface mount type S : Surface mount type reduced mounting area
(c)	Coil type	A : Standard type B : Single coil latching type
(d)	Coil rated voltage	4.5 : 3....24VDC Please refer to coil rating table
(e)	Contact material	G : Gold plated silver palladium (stationary contact) Silver palladium (movable contact)
(f)	Tape/reel version	Nil : Tube packing B05 : Tape & reel packing, only available for surface mount type

Actual marking does not carry the type name : "FTR". E.g.: Ordering code: FTR-C1CA012G Actual marking: C1CA012G

## ■ SPECIFICATIONS

Item			Specifications		Remarks/Conditions
			Non-latching FTR-C1( )A	Latching FTR-C1( )B	
Contact Data	Configuration		2c (2 Form C)		
	Construction		Bifurcated		
	Material		Gold plated silver palladium (stationary contact) Silver palladium (movable contact)		
	Resistance (initial)		Max. 150mΩ		At 1A, 6VDC
	Contact rating		0.3A, 125VAC/1A, 30VDC		Resistive
	Max. switching voltage		250VAC/220VDC		
	Max. switching power		62.5VA/30W		
	Max. carrying current		2A		
	Min. switching load <sup>*1</sup>		0.01mA, 10mVDC		Reference
Coil	Rated power		280 to 300mW	140 to 180mW	
	Operate power		158 to 162mW	158 to 162mW	
	Pulse width		-	Min. 20ms	
	Operating temperature range		-40°C to +85°C		No frost
	Storage temperature / humidity		-40°C to +85°C / 5% to 85% RH		No frost
Time	Operate (at nominal voltage)		Max. 6ms		Without bounce
	Release (at nominal voltage)		Max. 6ms		Without bounce
Life	Mechanical		Min. 10 x 10 <sup>6</sup> operations		
	Electrical (resistive)		Min. 100 x 10 <sup>3</sup> operations at 0.3A, 125VAC/1A, 30VDC		
Insulation	Insulation resistance		Min. 1,000MΩ		At 500VDC
	Dielectric strength	Open contacts	1,500VAC (50/60Hz) 1min.		
		Adjacent contacts	1,500VAC (50/60Hz) 1min.		
		Contacts to coil	3,000VAC (50/60Hz) 1min.		
	Surge strength	Contacts to coil	5,000V, 2 x 10μs		
		Open contacts	0.6mm		
		Adjacent contacts	1.0mm		
	Clearance	Contacts to coil	2.0mm		
		Open contacts	0.6mm		
		Adjacent contacts	1.0mm		
	Creepage	Contacts to coil	2.5mm		
Other	Vibration resistance	Misoperation>1μs	10 to 55 to 10Hz single amplitude 1.65mm		Coil ON/OFF, 3 axis, total 6 cycles
		Endurance	10 to 55 to 10Hz single amplitude 2.5mm		Coil OFF, 3 axis, total 6 hours
	Shock resistance	Misoperation>1μs	Min. 500m/s <sup>2</sup> (11±1ms)		Coil ON/OFF, 3 axis, total 36 operations
		Endurance	Min. 1,000m/s <sup>2</sup> (6±1ms)		Coil OFF, 3 axis, total 18 operations
	Dimensions / Weight		7.5 x 15.0 x 9.3mm / Approximately 2g		
	Sealing		RT III (plastic sealed)		

\*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL DATA

### ● Standard (non-latching) type

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance ( $\Omega$ ) $\pm 10\%$	Must Operate Voltage <sup>*1</sup> (VDC)	Must Release Voltage <sup>*1</sup> (VDC)	Nominal Coil Power (mW)
003	3	32.1	2.25	0.3	280
4.5	4.5	72.3	3.38	0.45	
005	5	89.3	3.75	0.5	
012	12	514	9.0	1.2	
024	24	1,920	18.0	2.4	300

### ● Latching type

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance ( $\Omega$ ) $\pm 10\%$	Set Voltage <sup>*1</sup> (VDC)	Reset Voltage <sup>*1</sup> (VDC)	Nominal Coil Power (mW)
003	3	64	+2.25	-2.25	140
4.5	4.5	145	+3.38	-3.38	
005	5	179	+3.75	-3.75	
012	12	1,029	+9.0	-9.0	
024	24	3,200	+18.0	-18.0	180

Note: All values in the table are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please perform the confirmation test with actual conditions.

## ■ SAFETY STANDARDS

Type	Compliance	Contact Rating
UL	Flammability: UL 94-V-0 (plastics)	
	UL 508 File No. E63615	0.3A, 125 VAC (general use) (UL) 0.5A, 125VAC (CSA)
CSA	C22.2 No. 14	2A, 30VDC (general use)
	File No. LR 40304	0.3A, 110VDC (general use)


## ■ PART NUMBER LIST

Part Number	Contact configuration	Coil Type	Contact Material	Tape/Reel version	Note
FTR-C1CA( )G	Through hole	Standard	Gold plated silver palladium (stationary contact)	Tube	Tape & reel package is not available
FTR-C1CB( )G		Latching			
FTR-C1GA( )G	Surface mount	Standard		Tube	-
FTR-C1GA( )G-B05				Tape & reel	
FTR-C1GB( )G		Latching		Tube	
FTR-C1GB( )G-B05				Tape & reel	
FTR-C1SA( )G	Surface mount reduced mounting area	Standard	Silver palladium (movable contact)	Tube	-
FTR-C1SA( )G-B05				Tape & reel	
FTR-C1SB( )G		Latching		Tube	
FTR-C1SB( )G-B05				Tape & reel	


## ■ DIMENSIONS

### Through hole type


#### ●Dimensions

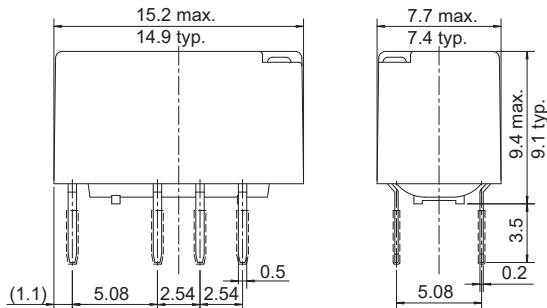

#### ●Schematics (BOTTOM VIEW)




#### ●Recommended PCB layout (BOTTOM VIEW)

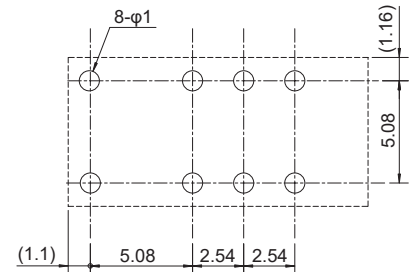


### Surface mount type


#### ●Dimensions

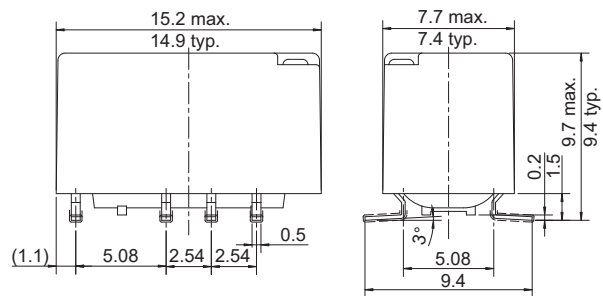

#### ●Schematics (TOP VIEW)




#### ●Recommended PCB layout (TOP VIEW)

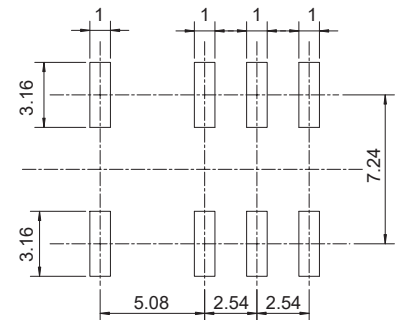


### Surface mount (space saving) type


#### ●Dimensions

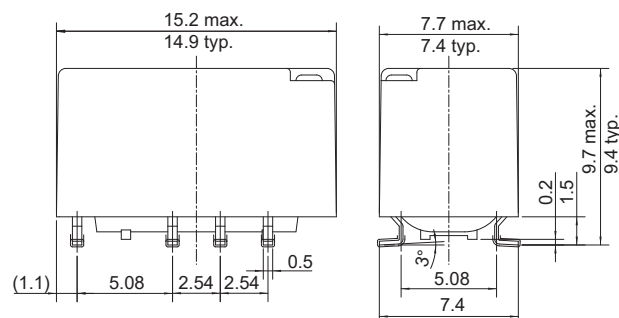

#### ●Schematics (TOP VIEW)



#### ●Recommended PCB layout (TOP VIEW)

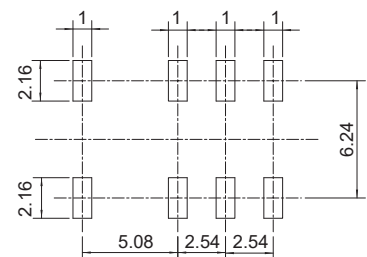

Note: (...) : dimensions are reference

Note: Dimensions of the terminals do not include thickness of pre-soldering.

Note: Dimensions do not include tolerances. Please ask specification in case you need tolerances.

Note: Tolerance of PCB layout:  $\pm 0.1$  unless otherwise specified.

Unit: mm

## ■ RECOMMENDED SOLDERING CONDITIONS FOR SURFACE MOUNT TYPE


(Temperature profile, please see page 7)

Notes:


1. Temperature profiles show the temperature of PC board surface
2. Please perform soldering test with your actual PC board before mass production, since the temperatures of PC board surfaces vary according to the size of PC board, status of parts mounting and heating method.

## ■ TAPE & REEL PACKAGING SPECIFICATION


1. Taping standards: JIS C 0806 and RC-10092B (EIAJ)
2. Tape type: TB2416 or TE2416
3. Reel type: RD24D
4. Quantity of 1 reel: 500 pieces

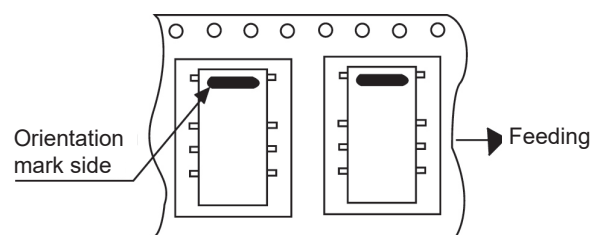

Tape Dimensions:

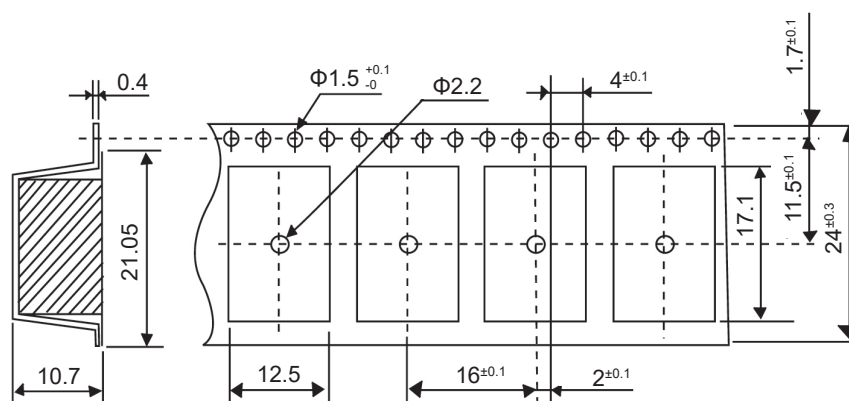

Reel Dimensions:

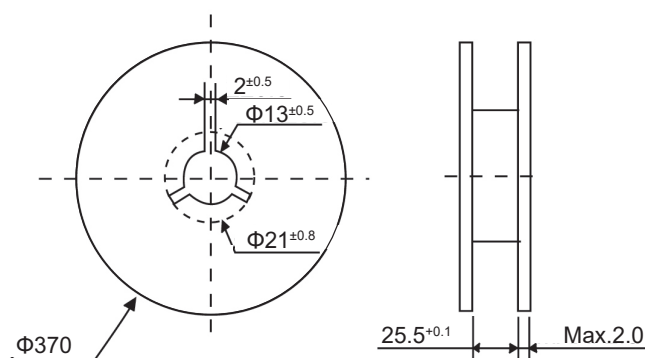


Unit: mm


## CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)


Distribution of operate/release voltage

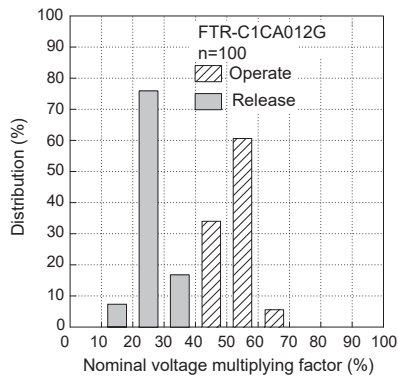


Distribution of operate time

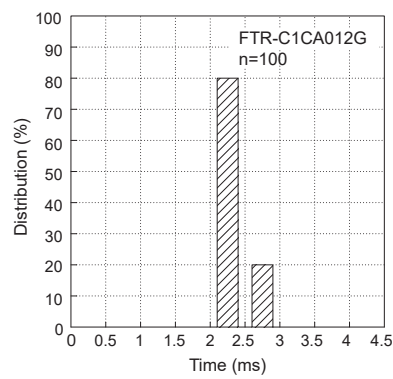


Distribution of release time

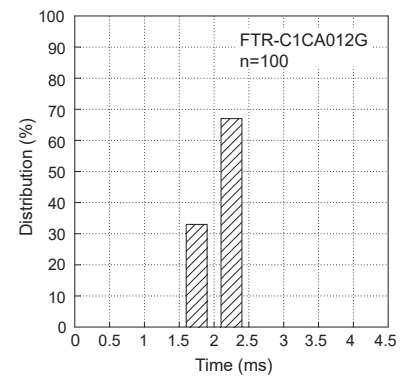


Set/reset time characteristics

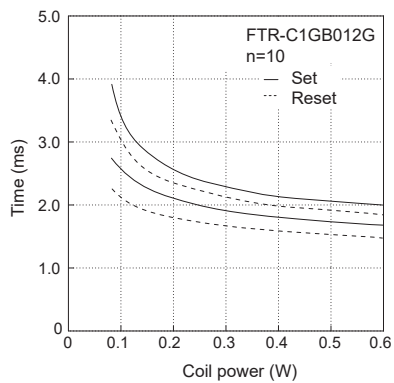


Pulse characteristics

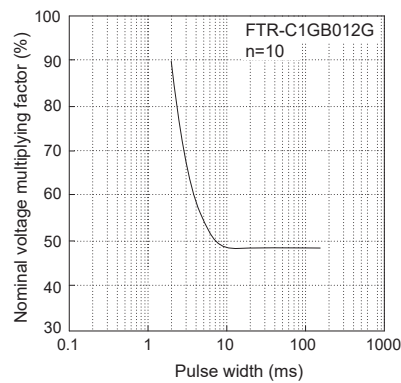


Distribution of contact resistance (Make contacts)

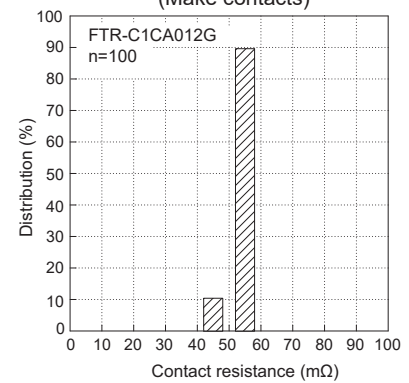


Distribution of contact resistance (Break contacts)

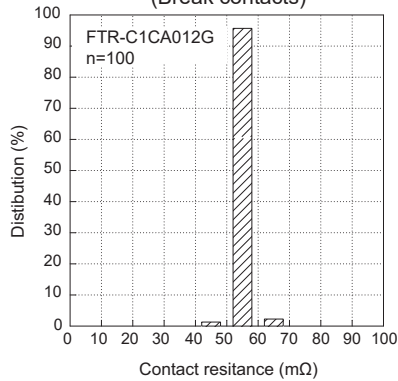


Maximum switching power

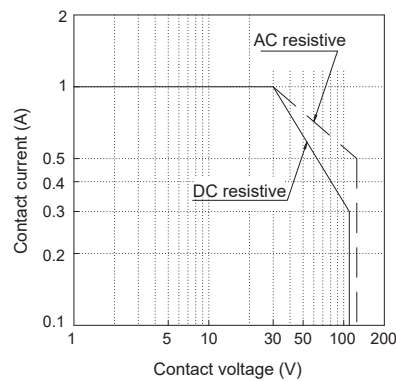


Life curve

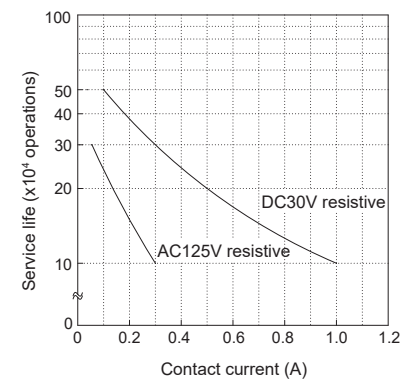


Operating range

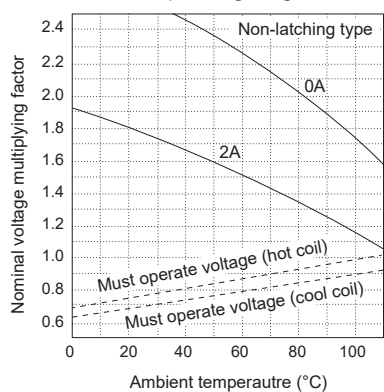

Operating range

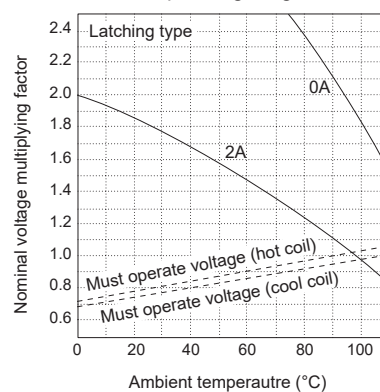

Coil temperature rise

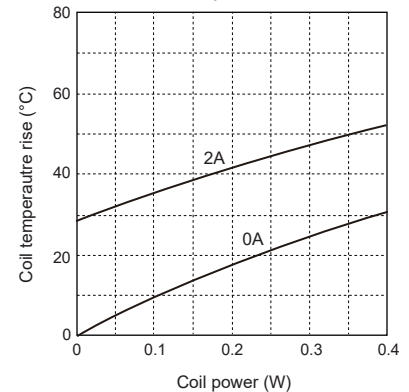

## CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is not available with standard type.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

### Notes for latching relays

- Latching relays are shipped in the state reset, but state may change due to shock during transportation or mounting.  
Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence.  
Otherwise, it will or will not operate simultaneously with power activation.
- Please connect relay coils according to specified polarity.
- Do not apply voltage to both set coil and reset coil at a time.

## GENERAL INFORMATION

### 1. RoHS Compliance

- All relays produced by FCL Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

### 2. Recommended lead free solder condition

#### Flow Solder Condition:

Pre-Heating: Maximum 120°C within 90 sec.  
Soldering: Dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering


#### Solder by Soldering Iron:

Soldering Iron: 30-60W  
Temperature: Maximum 350-360°C  
Duration: Maximum 3 sec.

#### Reflow Solder Condition:

(Applicable only for reflow capable type)

Recommended reflow soldering profile: IRS (infrared reflow soldering)

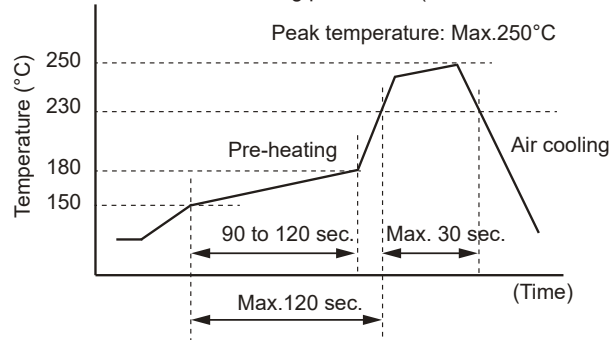

### Important notes for reflow soldering

- Temperature shall be measured at PC board upper surface.
- Temperature at PC board upper surface may be changed depending on size of PC board, components mounted on the PC board and/or heating method. Please perform the confirmation test with actual PC board.
- This reflow condition is applicable only for reflow-capable relays. Do not reflow reflow-incapable relays.
- Recommended solder for assembly: Sn-3.0 Ag -0.5 Cu.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- SMT versions of FTR-C1 relays in Tape & Reel package will be shipped in Moisture Barrier Bag (MBB).
- Moisture Sensitivity Level (MSL) of FTR-C1 relay is indicated on the packing caution label.
- Relays must be stored in the unopened MBB at storage conditions <40°C/90% RH for a maximum 1 year.
- SMT versions of FTR-C1 relays in tube packing will not be shipped in MBB. Therefore, these relays shall be dried by baking before reflow soldering process according to IPC/Jedex J-STD-033.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Contact

### Japan

FCL COMPONENTS LIMITED  
Shinagawa Seaside Park Tower  
12-4, Higashi-shinagawa 4-chome,  
Tokyo 140 0002, Japan  
Tel: +81-3-3450-1682  
Email: fcl-contact@cs.fcl-components.com

### North and South America

FCL COMPONENTS AMERICA, INC.  
2055 Gateway Place Suite 480,  
San Jose, CA 95110 USA  
Tel: +1-408-745-4900  
Email: contact@fcl-components.us

### Europe

FCL COMPONENTS EUROPE B.V.  
Diamantlaan 25  
2132 WV Hoofddorp, Netherlands  
Tel: +31-23-556-0910  
Email: info@fcl-components.eu

### Asia Pacific

FCL COMPONENTS ASIA PTE LTD.  
No. 20 Harbour Drive, #07-01B  
Singapore 117612  
Tel: +65-6375-8560  
Email: fcal@fcl-components.com

### China

FCL COMPONENTS (SHANGHAI) CO.,LTD.  
Unit 1105, Central Park - Jing An,  
No.329 Heng Feng Road, Shanghai  
200070, China  
Tel: +86-21-3253 0998  
Email: fcsh@fcl-components.com

### Hong Kong

FCL COMPONENTS HONG KONG CO.,  
LIMITED  
Unit 2313, Seapower Tower, Concordia  
Plaza, No.1 Science Museum Road,  
TST, Kowloon, Hong Kong  
Tel: +852-2881-8495  
Email: fcal@fcl-components.com

Web: [www.fcl-components.com/en/](http://www.fcl-components.com/en/)

© 2025 FCL Components Limited. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

FCL Components Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. FCL Components Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch system, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use FCL Components Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, FCL Components shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of FCL Components Products in the High Safety Required Applications.

FCL Components warrants that its Products, if properly used and services, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by FCL Components Limited as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

FCL Components has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

FCL Components Limited and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do FCL Components Limited and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January 7, 2025.