

650V N-Channel Super Junction MOSFET

Voltage	650 V	Rdson	60mΩ
Current	58.3 A	Qg	100.3nC

Feature:


- $R_{DS(ON) Max, V_{GS}@10V}$: 60mΩ
- Body diode with fast recovery characteristics
- High Speed Switching and Low $R_{DS(ON)}$
- 100% Avalanche Tested
- 100% Rg Tested
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case: TOLLK package
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.775 grams

Application

- Server Power/ Telecom Power / Industrial Power.

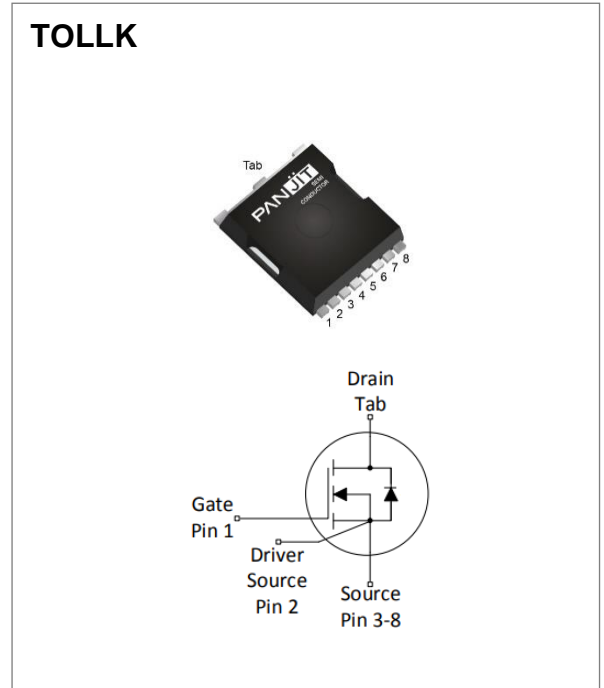

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise specified)

PARAMETER		SYMBOL	LIMIT	UNITS
Drain-Source Voltage @ T_{jmax}		V_{DS}	700	V
Drain-Source Voltage		V_{DS}	650	
Gate-Source Voltage		V_{GS}	± 30	
Continuous Drain Current	$T_C=25^\circ\text{C}$	I_D	58.3	A
	$T_C=100^\circ\text{C}$		36.9	
Pulsed Drain Current	$T_C=25^\circ\text{C}$	I_{DM}	128	A
Single Pulse Avalanche Energy (Note 6)		E_{AS}	480	mJ
MOSFET dv/dt ruggedness		dv/dt	120	V/ns
Diode dv/dt		dv/dt	70	V/ns
Power Dissipation	$T_C=25^\circ\text{C}$	Pd	500	W
	$T_C=100^\circ\text{C}$		200	
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55~150	$^\circ\text{C}$

Thermal Characteristics

PARAMETER	SYMBOL	VALUES			UNITS	
		MIN.	TYP.	MAX.		
Thermal Resistance	Junction-to-Case (Bottom)	$R_{\theta JC}$	-	0.18	0.25	$^\circ\text{C/W}$
	Junction-to-Ambient (Note 3)	$R_{\theta JA}$	-	30	50	$^\circ\text{C/W}$

Electrical Characteristics (T_A = 25 °C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250uA	650	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250uA	3.3	4.0	4.7	
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =10V, I _D =23A ^(Note 1)	-	47.4	60	mΩ
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =650V, V _{GS} =0V	-	-	10	uA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±30V, V _{DS} =0V	-	-	±100	nA
Transfer characteristics	g _{fs}	V _{DS} =20V, I _D =46A	-	50.6	-	S
Dynamic ^(Note 5)						
Total Gate Charge	Q _g	V _{DS} =400V, I _D =46A, V _{GS} =10V	-	100.3	-	nC
Gate-Source Charge	Q _{gs}		-	29.3	-	
Gate-Drain Charge	Q _{gd}		-	41.6	-	
Input Capacitance	C _{iss}	V _{DS} =400V, V _{GS} =0V, f=250kHz	-	4614	-	pF
Output Capacitance	C _{oss}		-	63.5	-	
Reverse Transfer Capacitance	C _{rss}		-	7	-	
Effective Output Capacitance Energy Related	C _{o(er)}		V _{DS} =0V to 400V, V _{GS} =0V, f=250kHz ^(Note 4)	-	123.1	
Turn-On Delay Time	t _{d(on)}	V _{DD} =400V, I _D =46A, V _{GS} =10V, R _G =10Ω ^(Note 2)	-	55.3	-	ns
Turn-On Rise Time	t _r		-	181.3	-	
Turn-Off Delay Time	t _{d(off)}		-	113	-	
Turn-Off Fall Time	t _f		-	114	-	
Gate Resistance	R _g	f=1.0MHz	-	6	12	Ω
Drain-Source Diode						
Maximum Continuous Drain-Source Diode Forward Current	I _S		-	-	58.3	A
Diode Forward Voltage	V _{SD}	I _S =23A, V _{GS} =0V	-	0.90	1.5	V
Reverse Recovery Charge	Q _{rr}	I _S =46A di/dt=100A/μs	-	2.3	-	uC
Reverse Recovery Time	T _{rr}		-	154.3	-	ns
Reverse Recovery Current	I _{rrm}		-	12	-	A

NOTES :

1. Pulse width ≤ 380us, Duty cycle ≤ 2%.
2. Essentially independent of operating temperature typical characteristics.
3. R_{θJA} is the sum of the junction-to-case and case-to-ambient thermal resistance.
4. C_{o(er)} is a capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0V to 400V.
5. Guaranteed by design, not subject to production testing.
6. E_{AS} is calculated based on the condition of L = 10 mH, I_{AS} = 9.8 A, V_{DD} = 50 V, V_{GS} = 10 V, however, PANJIT test L=10mH, I_{as}=7.8A 100% in mass production.

TYPICAL CHARACTERISTIC CURVES

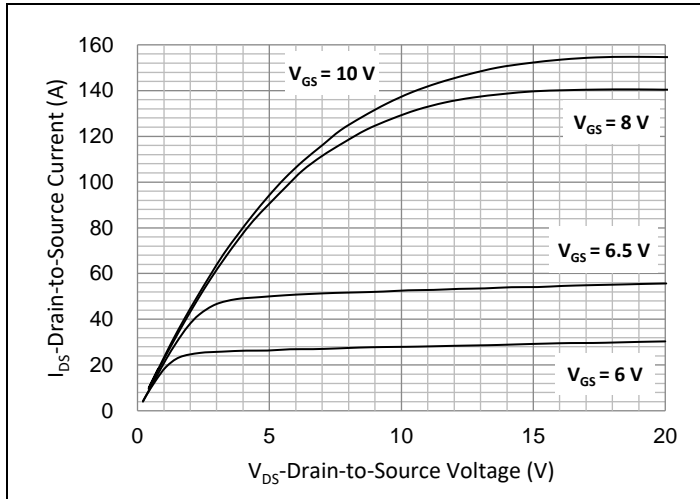


Fig.1 Output Characteristics

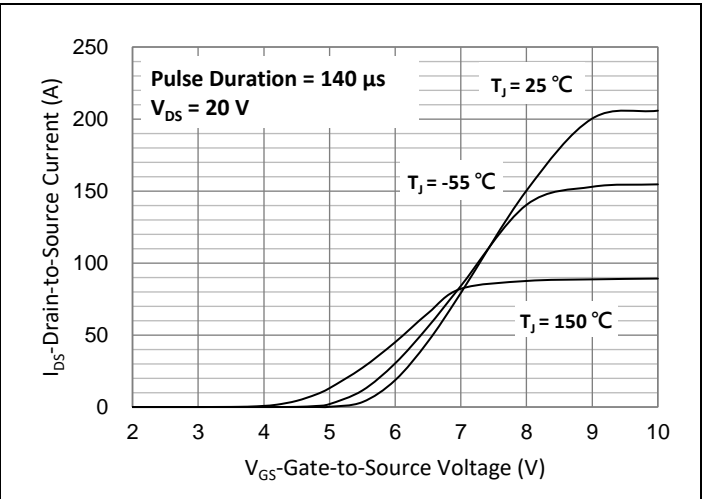


Fig.2 Transfer Characteristics

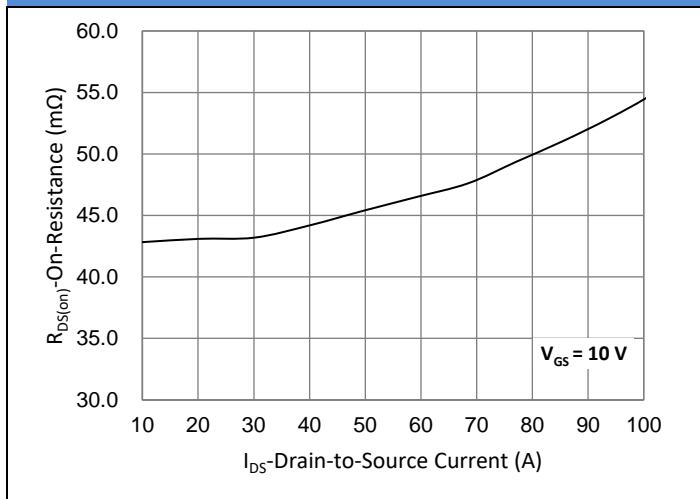


Fig.3 On-Resistance vs. Drain Current

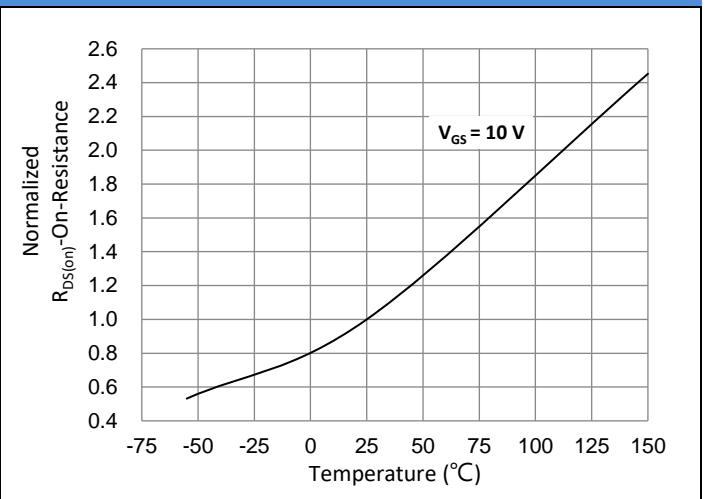


Fig.4 On-Resistance vs. Junction Temperature

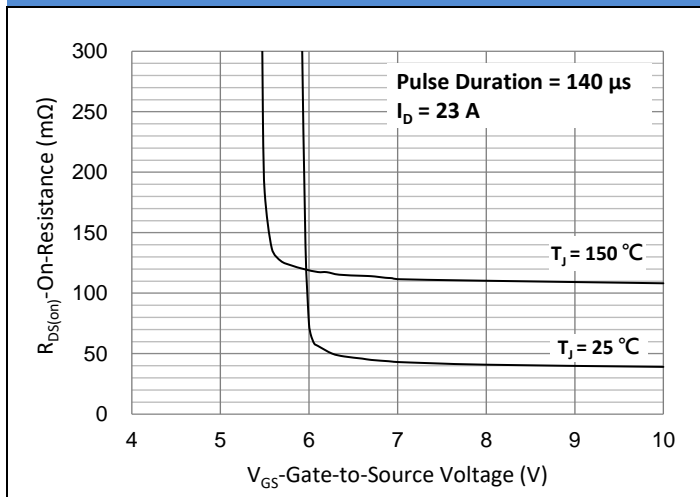


Fig.5 Capacitance vs. Drain-Source Voltage

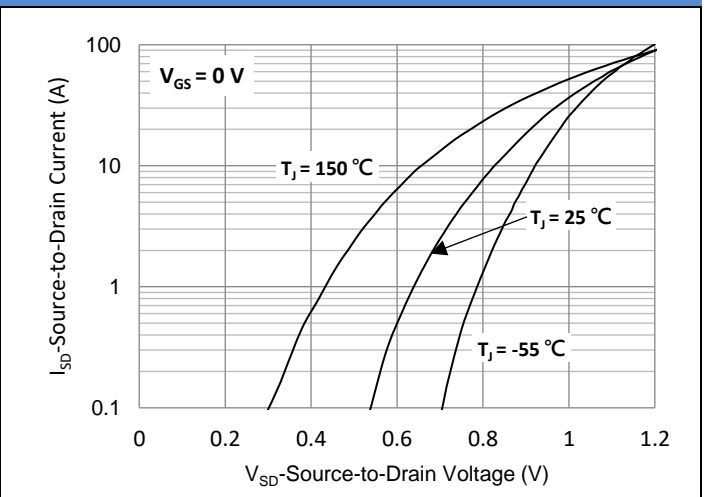


Fig.6 Source-Drain Diode Forward Voltage

TYPICAL CHARACTERISTIC CURVES

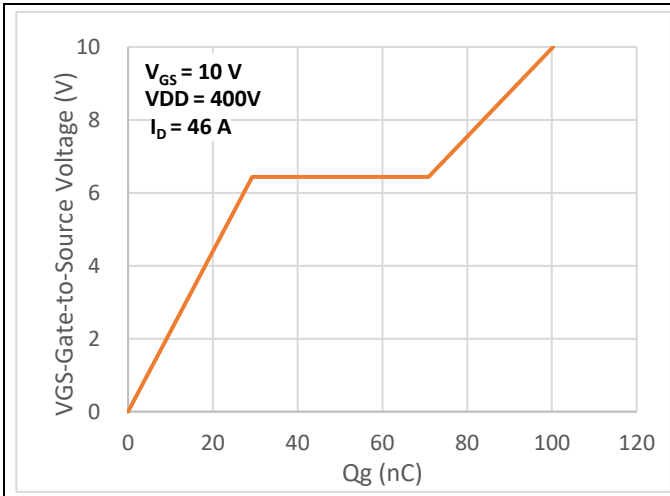


Fig.7 Gate-Charge Characteristics

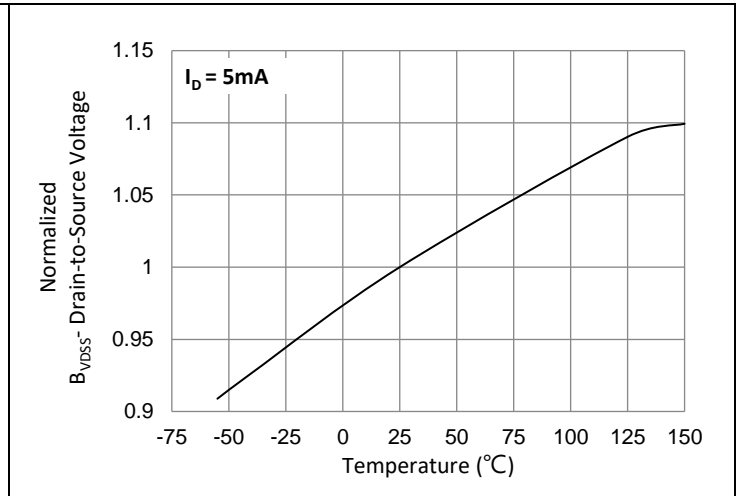


Fig.8 Breakdown Voltage Variation vs. Temperature

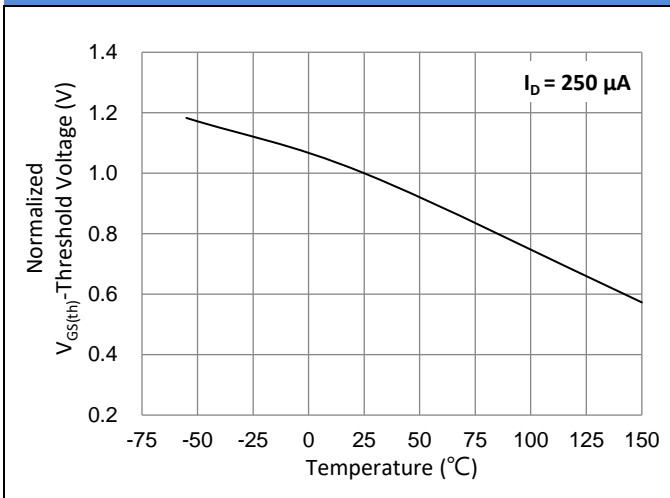


Fig.9 Threshold Voltage Variation with Temperature

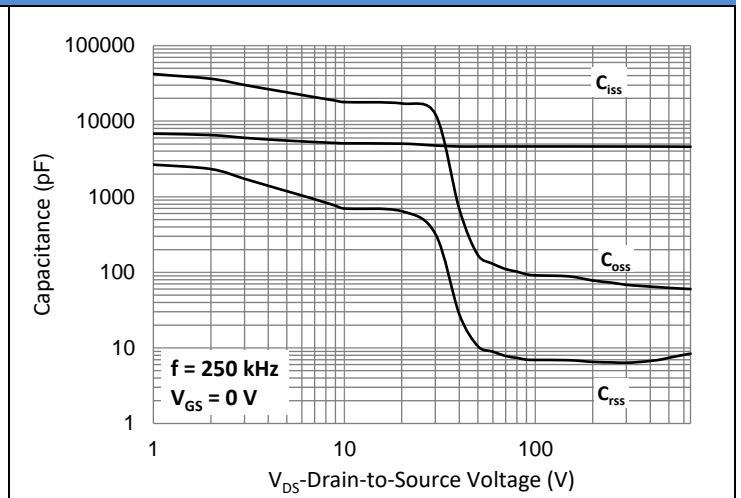


Fig.10 Drain Current vs. Case Temperature

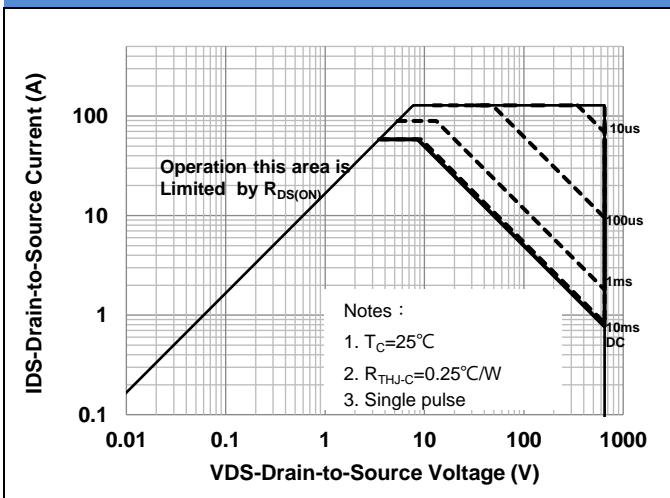


Fig.11 Maximum Safe Operating Area

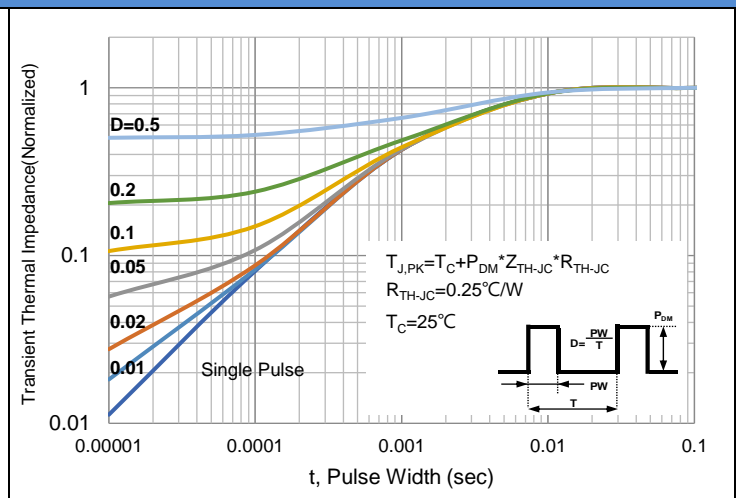


Fig.12 Normalized Transient Thermal Impedance

TYPICAL CHARACTERISTIC CURVES


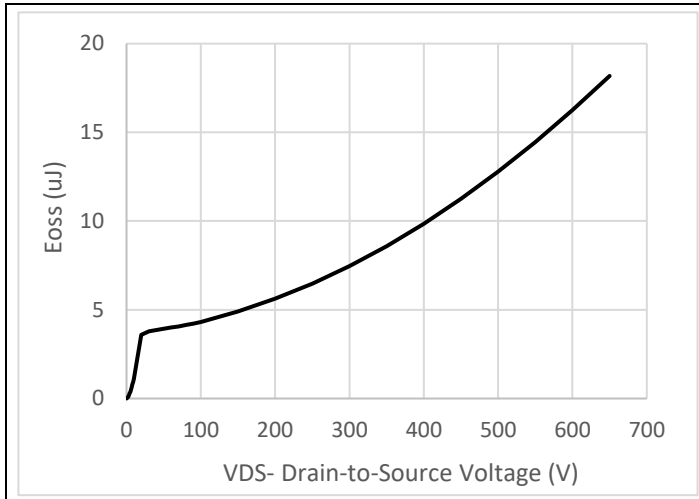


Fig.13 Typ. Coss Stored Energy


Product and Packing Information

Part No.	Package Type	Packing Type	Marking
PJMN060N65FR2	TOLLK	2000 pcs / 13" reel	060N65FR2

Packaging Information

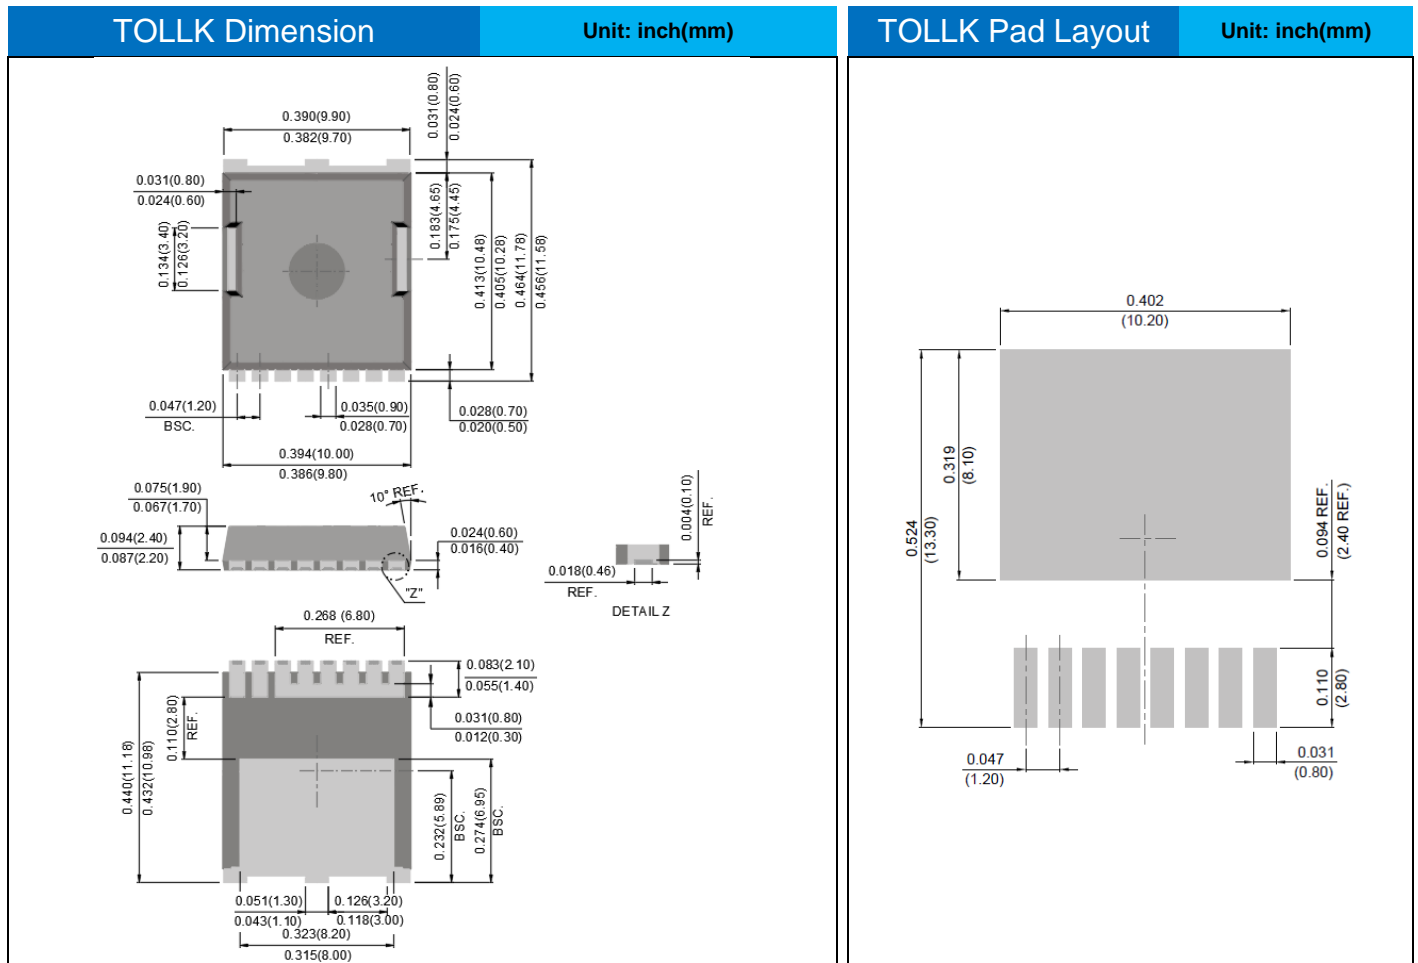

Marking Diagram

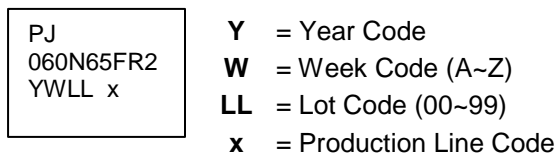

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.