

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Configurable safety relay, multi functions, up to SIL 3, Cat. 4, PL e, 2 sensor circuits, 1-/2-channel operation, automatic/manual, monitored start, 2 x 2 enabling current paths, 2 signal outputs, $U_S = 24$ V DC, plug-in Push-in terminal block

Product description

The PSR-UNI-L multifunctional safety relay is a flexible safety solution for industrial applications. It enables the monitoring of various items of safety equipment, e.g., emergency stop, safety doors, and light grids. Thanks to its configurability, it can be adapted to specific requirements.

Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- 2 independent circuits
- Locally configurable
- Configuration help via clipx ENGINEER device parameterization
- 1- and 2-channel control
- Manually monitored and automatic activation in a single device
- Low housing width of only 22.5mm

Commercial data

Item number	1487644
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN01
Product key	DNA191
GTIN	4063151932404
Weight per piece (including packing)	222.21 g
Weight per piece (excluding packing)	199.82 g
Customs tariff number	85371098
Country of origin	DE

PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays



1487644

<https://www.phoenixcontact.com/us/products/1487644>

Technical data

Product properties

Product type	Safety relays
Product family	PSRuni
Application	Emergency stop Safety door Light grid Magnetic switch Two-hand control Safety shut-off mats
Control	1 and 2 channel
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

Insulation characteristics

Overvoltage category	III (Between logic and enabling current paths)
Degree of pollution	2

Times

Typical response time	< 100 ms (Automatic/manual start) < 500 ms (Safety shut-off mat operation)
Typ. starting time with U_s	1 s (when controlled via A1; applicative control via A1/A2 is not permitted)
Typical release time	< 25 ms (on demand via the sensor circuit) < 85 ms (Safety shut-off mat operation) < 25 ms (When requested via A1; applicative deactivation via A1/A2 is not permitted)
Restart time	< 1 s (Boot time)
Recovery time	500 ms (following demand of the safety function) > 100 ms (Availability time after activating the sensor circuit during manual start) > 500 ms (Availability time after activating the sensor circuits during manual start in safety shut-off mat operation)
Start pulse length	min. 500 ms (manual start)

Electrical properties

Maximum power dissipation for nominal condition	9.15 W (At $U_S = 30$ V, $I_L^2 = 144$ A 2 , configured functions: mode 1 = 2, mode 2 = 2)
Nominal operating mode	100% operating factor
Rated insulation voltage	250 V
Rated surge voltage/insulation	See data sheet, section "Insulation coordination".

Supply

Designation	A1/A2
Rated control circuit supply voltage U_S	24 V DC -20 % / +25 %

PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays

1487644

<https://www.phoenixcontact.com/us/products/1487644>



Rated control supply current I_S	typ. 65 mA (When sensor circuit and start circuit are controlled internally) typ. 45 mA (When sensor circuit and start circuit are controlled externally)
Power consumption at U_S	typ. 1.32 W
Inrush current	typ. 35 A ($\Delta t = 25 \mu s$ at U_S)
Filter time	1 ms (logic)
Protective circuit	Serial protection against polarity reversal Suppressor diode

Input data

Digital: Logic (I1.1, I1.2, I2.1, I2.2)

Description of the input	safety-related IEC 61131-2 type 3
Number of inputs	4
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Input current range "0" signal	0 mA ... 1.5 mA
Inrush current	< 45 mA (typ. with U_S , $\Delta t < 50 \mu s$)
Filter time	max. 3 ms (Test pulse width of low test pulses) min. 50 ms (Test pulse rate for low test pulse) < 1 ms (High test pulses at >100 ms test pulse rate possible)
Concurrence	∞ (2-channel wiring), 5 s (non-equivalent wiring), 0.5 s (two-hand control)
Limit frequency	min. 0 Hz max. 0.1 Hz
Max. permissible overall conductor resistance	150 Ω
Protective circuit	Varistor
Current consumption	3.5 mA (typ. with U_S)

Digital: Start circuit (S34, S36)

Description of the input	non-safety-related IEC 61131-2 type 3
Number of inputs	2
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Input current range "0" signal	0 mA ... 1.5 mA
Inrush current	< 45 mA (typ. with U_S , $\Delta t < 50 \mu s$)
Filter time	max. 3 ms (Test pulse width of low test pulses) min. 50 ms (Test pulse rate for low test pulse)
Limit frequency	min. 0 Hz max. 0.1 Hz
Max. permissible overall conductor resistance	150 Ω
Protective circuit	Varistor
Current consumption	< 3.5 mA (typ. with U_S)

PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays

1487644

<https://www.phoenixcontact.com/us/products/1487644>



Output data

Relay: Enabling current paths (13/14, 23/24, 33/34, 43/44)

Output description	safety-related
	2 NO contacts each in series, without delay, floating
Number of outputs	4 (undelayed)
Contact switching type	4 enabling current paths
Contact material	AgCuNi +0.2 µm ... 0.4 µm Au / AgSnO ₂ +0.2 µm Au
Switching voltage	min. 10 V AC/DC
	max. 250 V AC/DC
Switching power	min. 60 mW
Inrush current	min. 3 mA
	max. 6 A
Switching capacity	5 A (DC13)
	3 A (AC15)
Limiting continuous current	6 A
Sq. Total current	144 A ² (K1 = 72 A ² , K2 = 72 A ² , observe derating)
Switching frequency	max. 0.1 Hz
Mechanical service life	10x 10 ⁶ cycles
Output fuse	6 A gL/gG
	4 A gL/gG (for low-demand applications)

Signal: M1, M2

Output description	non-safety-related
Number of outputs	2
Voltage	typ. (U _S - 2,5 V)
Current	max. 100 mA
Maximum inrush current	500 mA (Δt = 10 ms at U _s)
Ohmic load	min. 192 Ω (max. 100 mA)
Switching frequency	max. 0.1 Hz
Protective circuit	Reverse polarity protection
	Suppressor diode
Short-circuit protection	Yes
Discharging circuit	no

Clock: T1, T2

Output description	non-safety-related
Number of outputs	2
Voltage	typ. (U _S - 2,5 V)
Current	max. 100 mA
Maximum inrush current	500 mA (Δt = 10 ms at U _s)
Protective circuit	Reverse polarity protection
	Suppressor diode
Short-circuit protection	Yes

PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays



1487644

<https://www.phoenixcontact.com/us/products/1487644>

Cable length	See inputs
Discharging circuit	no

Connection data

Connection technology	
pluggable	yes

Conductor connection	
Connection method	Push-in connection
Conductor cross-section rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 14
Stripping length	10 mm

Signaling

Status display	4 x LED (green, yellow, red)
Operating voltage display	1 x LED (green, yellow, red)
Error indication	1 x LED (red)

Dimensions

Width	22.5 mm
Height	107.9 mm
Depth	111.7 mm

Material specifications

Color	yellow (RAL 1018)
Housing material	PA

Characteristics

Safety data	
Stop category	0

Safety data: EN ISO 13849	
Category	4 (5 A DC13; 3 A AC15; 8760 cycles/year)
Performance level (PL)	e

Safety data: IEC 61508 - High demand	
Safety Integrity Level (SIL)	3

Safety data: IEC 61508 - Low demand	
Safety Integrity Level (SIL)	3

Safety data: EN IEC 62061	
Safety Integrity Level (SIL)	3

Environmental and real-life conditions

PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays

1487644

<https://www.phoenixcontact.com/us/products/1487644>



Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-25 °C ... 60 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	15g
Vibration (operation)	10 Hz ... 150 Hz, 2g

Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays


1487644

<https://www.phoenixcontact.com/us/products/1487644>

PHÖNIX CONTACT


Drawings

Circuit diagram

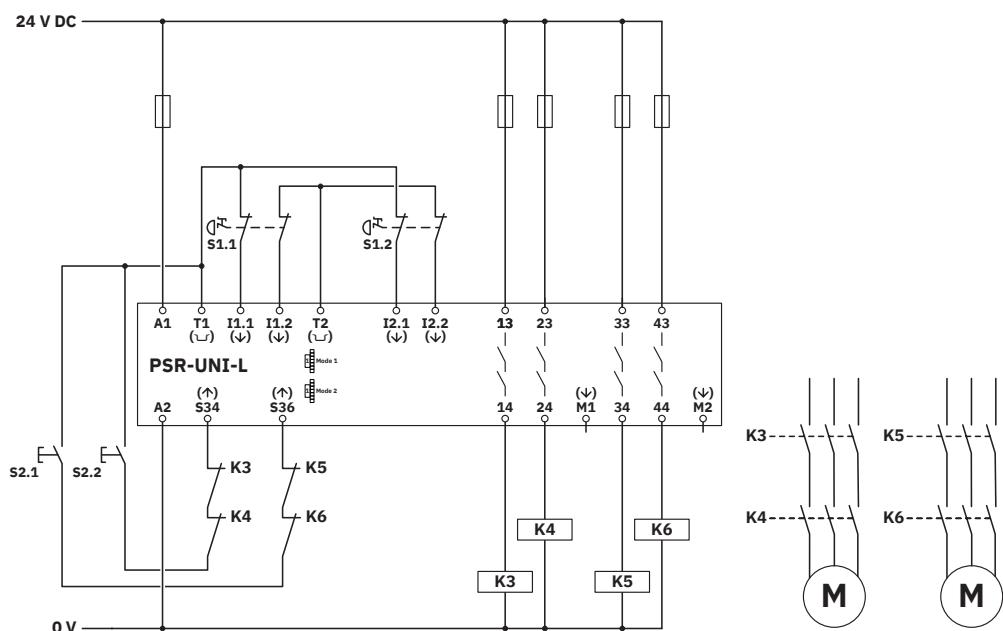

2-channel emergency stop monitoring

Circuit diagram

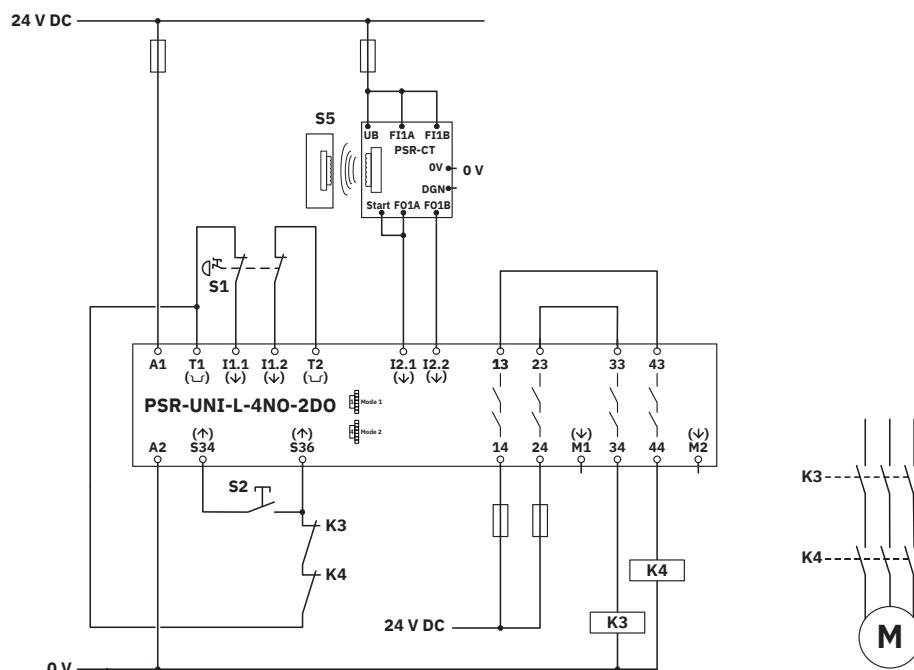

Emergency stop monitoring and transponder monitoring with common load


PSR-UNI-L-2X2NO-2DO-24DC-PI - Safety relays



1487644

<https://www.phoenixcontact.com/us/products/1487644>

Block diagram

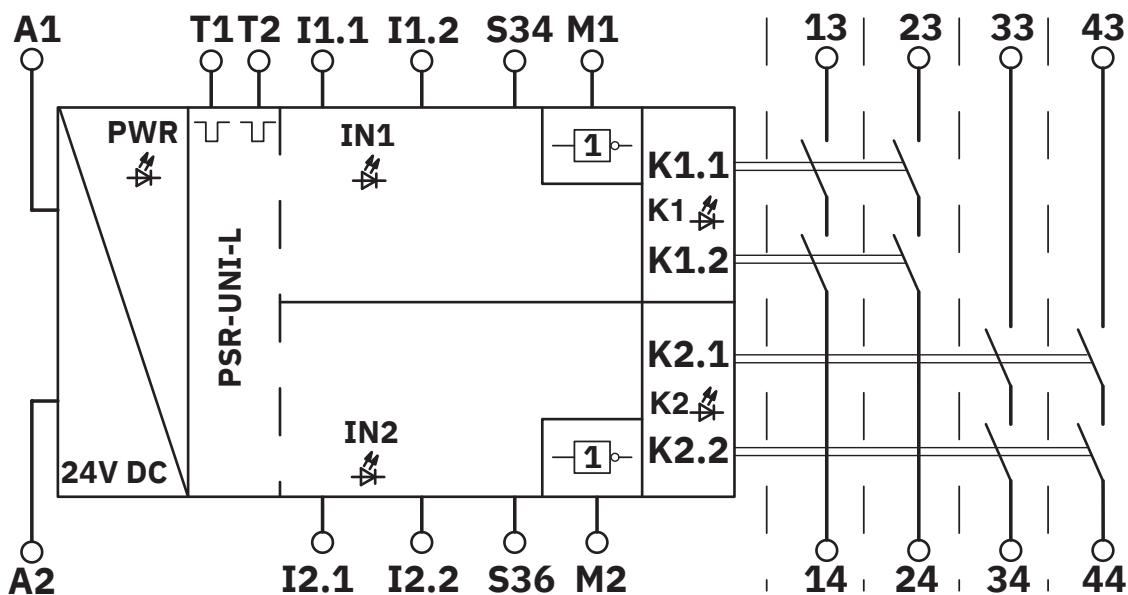

Block diagram

1487644

<https://www.phoenixcontact.com/us/products/1487644>

Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1487644>



cULus Listed

Approval ID: E140324



Functional Safety

Approval ID: 01/205/6009.00/24

Classifications

ECLASS

ECLASS-13.0	27371819
ECLASS-15.0	27371819
ECLASS-15.0 ASSET	27250101

ETIM

ETIM 9.0	EC001449
----------	----------

UNSPSC

UNSPSC 21.0	39122200
-------------	----------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com