

https://www.phoenixcontact.com/us/products/1679333



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 4+8+2PE, size: B24, power contacts: 4, control contacts: 8, Pin, Screw connection, 400 V, 80 A, 1.5 mm<sup>2</sup> ... 16 mm<sup>2</sup>

### Your advantages

• Shock and vibration-resistant in accordance with DIN EN 61373

#### Commercial data

Item number	1679333
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	AF7ABA
GTIN	4017918163570
Weight per piece (including packing)	147.3 g
Weight per piece (excluding packing)	147.3 g
Customs tariff number	85366990
Country of origin	CN



https://www.phoenixcontact.com/us/products/1679333



### Technical data

#### Notes

General	For housing HC-B24
General	Connectors may be operated only when there is no load/voltage.

### Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required	
	Use wire end protection (screw connections do not have wire protection)	

### Product properties

Product type	Contact insert with a fixed no. of positions
Series	HC-K
Туре	B24
	B48
Number of positions	12
Connection profile	4+8+2PE
Contact numbering	1 - 4 (power contacts)
	1 - 8 (control contacts)
No. of power contacts	4
No. of control contacts	8
Contact material type	turned
Screwdriver blade	0.8 x 4.5 mm (power contacts)

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Dimensions

Dimensional drawing	111 104 27 21 21 21 21 21 21 21 21 21 21 21 21 21
Width	34 mm
Height	42 mm
Length	111 mm
Drill hole distance, horizontal	104 mm
Mechanical characteristics	
Contact diameter	6 mm

### Connection data



https://www.phoenixcontact.com/us/products/1679333



#### Connection technology

Connection technology	Screw connection (power contacts)
	Screw connection (control contacts)
Conductor connection	
Conductor cross section	1.5 mm <sup>2</sup> 16 mm <sup>2</sup> (power contacts)
	0.5 mm <sup>2</sup> 2.5 mm <sup>2</sup> (control contacts)
Connection cross section AWG	16 6 (power contacts)
	20 14 (control contacts)
Tightening torque	0.8 Nm 1.2 Nm (PE connection)
	0.5 Nm 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
	2 Nm (Power contact, 2.5 mm²)
	3 Nm (Power contact, 4 16 mm²)
	0.5 Nm (control contacts)
	1.2 Nm (Power contact, 1.5 mm²)
Stripping length of the individual wire	14 mm (Power)
	7 mm (Signal)

### Electrical properties

Rated voltage (III/3)	400 V (power contacts)
	400 V (control contacts)
Rated surge voltage	6 kV (power contacts)
	6 kV (control contacts)
Rated current	80 A (power contacts)
	16 A (control contacts)

### Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 500
· · · · · · · · · · · · · · · · · · ·	

### Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA
Material of contact surface, power contact	Ag
Material of contact surface, control contact	Ag
Standards/regulations	PC
	PC

#### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C
---------------------------------	---------------



https://www.phoenixcontact.com/us/products/1679333



### Standards and regulations

_			
ь.	est	ın	2

resumg			
Standards/regulations	PC: Fire protection in rail vehicles - requirement set R22 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)		
	PC: Fire protection in rail vehicles - requirement set R23 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)		


1679333


https://www.phoenixcontact.com/us/products/1679333



### Drawings


### Dimensional drawing

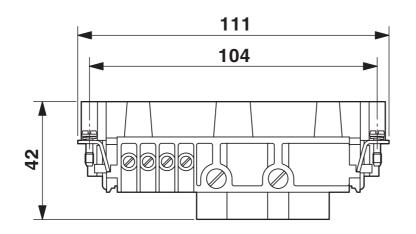



Male insert

### Dimensional drawing

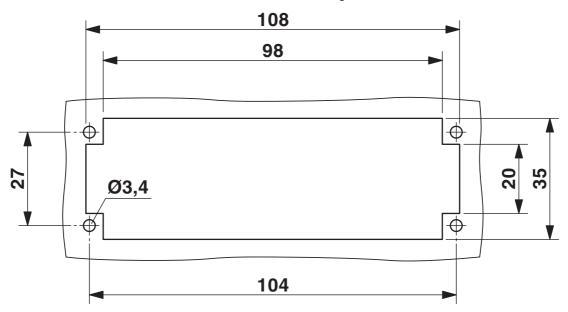


Mounting cutout when used without housing



https://www.phoenixcontact.com/us/products/1679333



### Schematic diagram

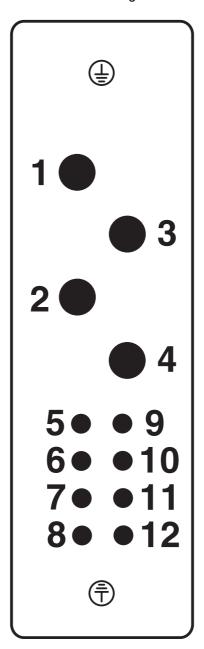


Connector pin assignment, connection side



1679333

https://www.phoenixcontact.com/us/products/1679333

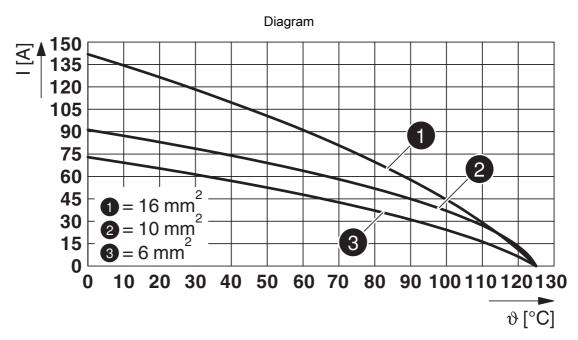

Derating diagram



https://www.phoenixcontact.com/us/products/1679333



### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1679333

SU UL Reco	SUL Recognized Approval ID: E118976			
	Nominal voltage $\mathbf{U}_{\mathbf{N}}$	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine				
Power	600 V	80 A	- 6	-
Control	600 V	16 A	14	-



1679333

https://www.phoenixcontact.com/us/products/1679333

### Classifications

#### **ECLASS**

	ECLASS-13.0	27440205				
	ECLASS-15.0	27440205				
ETIM						
	ETIM 9.0	EC000438				
UNSPSC						
	UNSPSC 21.0	39121500				



https://www.phoenixcontact.com/us/products/1679333



### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	88d69e56-bf70-41ab-b808-0e686d240ba9
EF3.0 Climate Change	
CO2e kg	15.319 kg CO2e

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com