

1341925

https://www.phoenixcontact.com/us/products/1341925

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Device connector front mounting, series: M23 PRO Signal, angled rotatable, shielded: yes, for standard and ONECLICK fast locking system, No. of pos.: 6, Direction of rotation: Standard, contact connection type: Pin, Crimp connection, flange dimensions: 26 mm x 26 mm, coding: N, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

#### Your advantages

- · Solutions with cross-manufacturer compatibility for standard and fast locking systems
- · Modern, consistent design for highly convenient operation
- · Crimping connection: vibration- and temperature-resistant assembly
- · All housing can be fitted with pin or socket contacts
- · Safe use in the field, thanks to high degree of protection

#### Commercial data

Item number	1341925
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB30
Product key	ABRABM
GTIN	4063151651817
Weight per piece (including packing)	117.6 g
Weight per piece (excluding packing)	101.031 g
Customs tariff number	85366990
Country of origin	DE



1341925

https://www.phoenixcontact.com/us/products/1341925

#### Technical data

#### Notes

Order information:	Order crimp contacts 6 x Ø 2 mm separately		
Notes on operation	Please observe the derating curve.		
Safety note			
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.		
	<ul> <li>WARNING: Commission properly functioning products only.</li> <li>The products must be regularly inspected for damage.</li> <li>Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> </ul>		
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.		
	<ul> <li>The products are suitable for applications in plant, controller, and electrical device engineering.</li> </ul>		
	When operating the connectors in outdoor applications, they must be separately protected against environmental influences.		
	<ul> <li>Assembled products may not be manipulated or improperly opened.</li> </ul>		
	<ul> <li>Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).</li> </ul>		
	<ul> <li>When using the product in direct connection with third-party manufacturers, the user is responsible.</li> </ul>		
	<ul> <li>For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>		
	<ul> <li>Ensure that the protective or functional ground has been properly connected.</li> </ul>		
	<ul> <li>VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector</li> </ul>		
	Only use tools recommended by Phoenix Contact		
	<ul> <li>The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.</li> </ul>		
	<ul> <li>Operate the connector only when it is fully plugged in and interlocked.</li> </ul>		
	<ul> <li>Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>		
	<ul> <li>Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li> </ul>		
	The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to		



1341925

https://www.phoenixcontact.com/us/products/1341925

	warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
duct properties	
Product type	Circular connectors (device side)
erial specifications	
·	
Flammability rating according to UL 94	V0
nnector	
nsulating body	Order information Order minus contests (2.2 mm constatute
Note	Order information: Order crimp contacts Ø 2 mm separately
Coding  Meterial (Insulating hady)	N DA 6 6
Material (Insulating body)	PA 6.6 V0
Flammability rating according to UL 94  Connection method	Crimp connection
Contact switching type	Pin
	Signal
Application  Number of positions	6
Direction of rotation	Standard
	6
Connection profile	6
Number Contact (Contact group 1)	
Diameter Contact (Contact group 1)	2 mm
Rated current Contact (Contact group 1)	20 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC 74 V DC
Detect comes welfers	
Rated surge voltage	1.5 kV
Overvoltage category	
Degree of pollution	3
lousing	
Туре	Flange housing
Thread type	M23
Design	angled rotatable
Type of locking	for standard and ONECLICK fast locking system
Pg screw connection	none
Mounting type	Front mounting/square flange (4x Ø 3.1 mm)
Flange dimensions	26 mm x 26 mm
Housing material	GD-Zn
Degree of protection (plugged in)	IP66/IP68 (2 m / 24 h)

#### Environmental and real-life conditions

Ambient	conditions

Degree of protection	IP68



1341925

https://www.phoenixcontact.com/us/products/1341925

Ambient temperature (operation)	-40 °C 105 °C (see to derating)	
Altitude	2000 m	
Permanent temperature	125 °C (DIN EN 60512-9-2 / 1000 h)	





1341925

https://www.phoenixcontact.com/us/products/1341925

### Drawings

Dimensional drawing

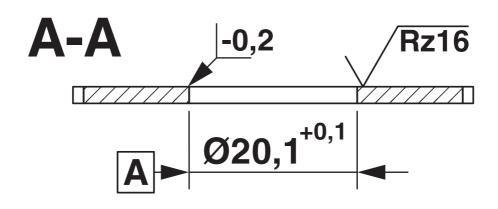

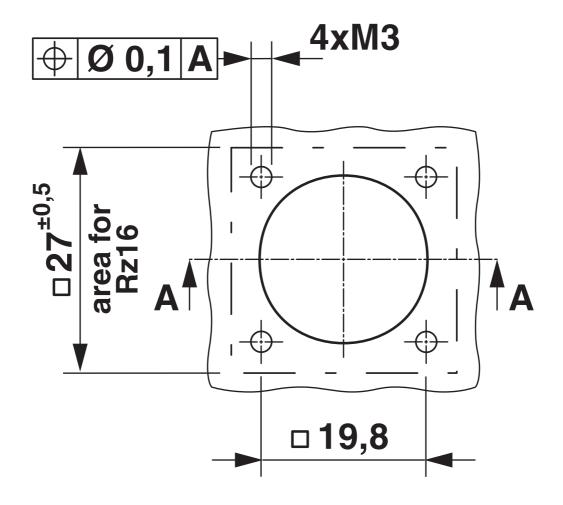


Installation dimensions



1341925

https://www.phoenixcontact.com/us/products/1341925

Schematic diagram

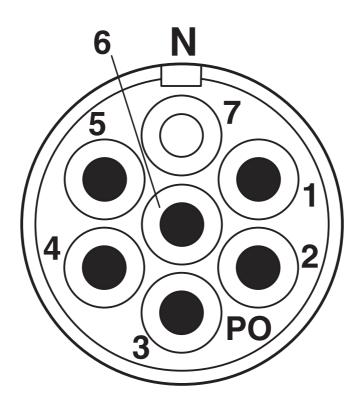


Connector pin assignment



1341925

https://www.phoenixcontact.com/us/products/1341925

Schematic diagram

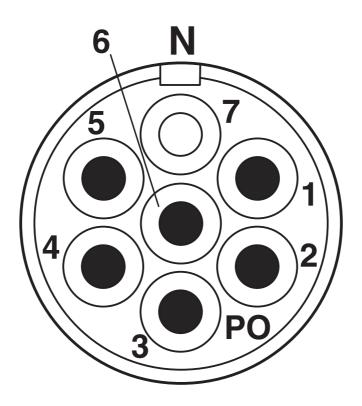


Connector pin assignment



1341925

https://www.phoenixcontact.com/us/products/1341925

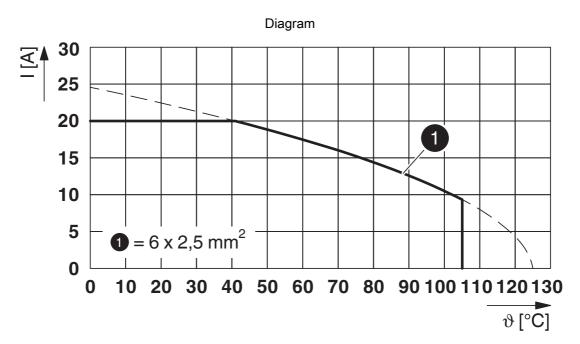

I = current strength,  $\vartheta$  = ambient temperature, 6x 20 A



1341925

https://www.phoenixcontact.com/us/products/1341925

#### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1341925

cUL Recognized Approval ID: E335019-20141210					
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
		300 V	10 A	- 14	-

<b>7.1</b>	UL Recognized Approval ID: E335019-20141210				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
		300 V	17 A	- 14	-



1341925

https://www.phoenixcontact.com/us/products/1341925

### Classifications

#### **ECLASS**

	ECLASS-13.0	27440109				
	ECLASS-15.0	27440109				
ΕT	ETIM					
	ETIM 9.0	EC003569				
UNSPSC						
	UNSPSC 21.0	39121400				



1341925

https://www.phoenixcontact.com/us/products/1341925

#### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions			
China RoHS				
Environment friendly use period (EFUP)	EFUP-E			
	No hazardous substances above the limits			
EU REACH SVHC				
REACH candidate substance (CAS No.)	No substance above 0.1 wt%			

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com