

1417392

https://www.phoenixcontact.com/us/products/1417392

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 2, power contacts: 2, control contacts: 0, Pin, Axial screw connection, 1000 V, 100 A, 10 mm² ... 35 mm², application: Power

Commercial data

Item number	1417392
Packing unit	2 pc
Minimum order quantity	2 pc
Sales key	BF62
Product key	AF7ACE
GTIN	4055626112718
Weight per piece (including packing)	67.5 g
Weight per piece (excluding packing)	66.83 g
Customs tariff number	85366990
Country of origin	PL



https://www.phoenixcontact.com/us/products/1417392



Technical data

Notes

General	For HEAVYCON HC-B6 to B48 housing, snap-in module frame required, axial connection for 4 mm Allen key
General	Connectors may be operated only when there is no load/voltage.
General	The axial screw connection must be established using a 4 mm Allen key (for stranded conductors only)

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection
Assembly note	or better is required
	Note regarding axial connection technology: Only for stranded wires. The specified conductor cross-sections refer to the geometric cross section of the cable used. Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be
	checked before use. The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use.
	Assembly instructions Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque.
Hexagonal socket	SW 4

Product properties

Product type	Modular contact insert
Series	HC-M-HS
Application	Power
Number of positions	2
Connection profile	2
Contact numbering	1 - 2
Number of module slots	2
No. of power contacts	2
No. of control contacts	0
Contact material type	turned



1417392

https://www.phoenixcontact.com/us/products/1417392

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data

Connection technology

<u> </u>	
Connection technology	Axial screw connection
conductor connection	
Conductor cross section	10 mm² 35 mm² (The cross section specification refers to the geometric cross section of the cable used)
Connection cross section AWG	8 2
Tightening torque	6 Nm (10 mm² 16 mm²)
	7 Nm (25 mm²)
	8 Nm (35 mm²)
Stripping length of the individual wire	14 mm (with an outside conductor diameter up to 9 mm)
	16 mm (with an outside conductor diameter up to 11.5 mm)

Dimensions

Width 34.2 mm Height 49 mm	Dimensional drawing	53,3
Height 49 mm	Width	34.2 mm
10 11111	Height	49 mm
Length 29.4 mm	Length	29.4 mm

Mechanical characteristics

Minimum housing height	72 mm
Contact diameter	8 mm

Electrical properties

Rated voltage (III/3)	1000 V
Rated surge voltage (III/2)	8 kV
Rated surge voltage (III/3)	8 kV
Rated surge voltage	8 kV
Rated current	100 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0



1417392

https://www.phoenixcontact.com/us/products/1417392

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC
Standards/regulations	PC

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C

Standards and regulations

Testing


Standards/regulations	PC: Fire protection in rail vehicles - requirement sets R22, R23,
	and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)




1417392

https://www.phoenixcontact.com/us/products/1417392

Drawings

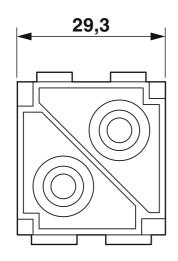

Dimensional drawing

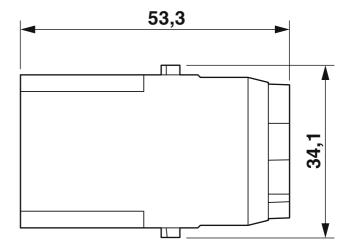


Male insert



1417392

https://www.phoenixcontact.com/us/products/1417392

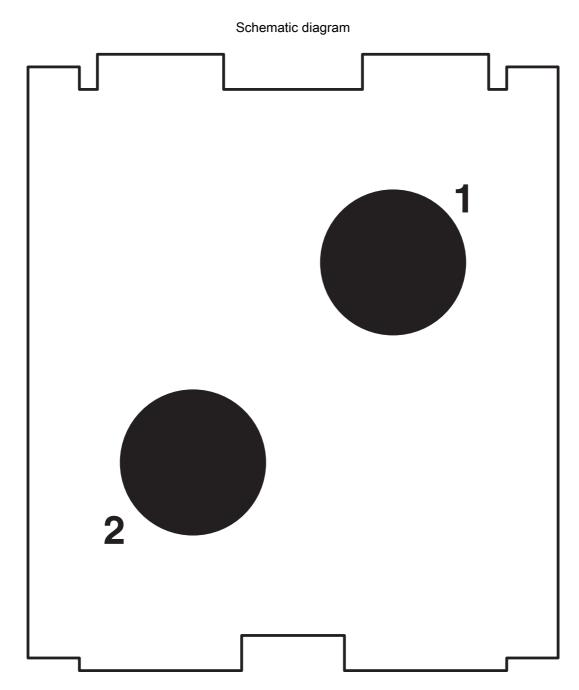


Connector pin assignment




1417392

https://www.phoenixcontact.com/us/products/1417392

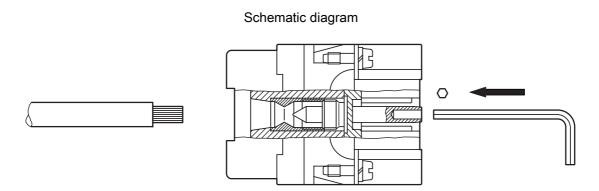

Axial connection

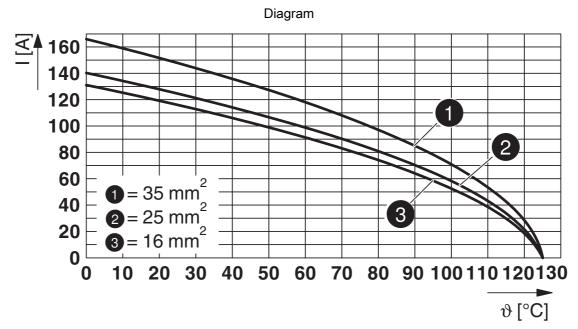

Derating diagram



1417392

https://www.phoenixcontact.com/us/products/1417392

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1417392

DNV
Approval ID: TAE0000379

•	CSA Approval ID: 13631				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		600 V	100 A	- 2	-

7.	UL Recognized Approval ID: E118976				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		600 V	127 A	- 2	-

c FL vs	cULus Recognized Approval ID: E468743				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		1000 V	100 A	- 2	-



1417392

https://www.phoenixcontact.com/us/products/1417392

Classifications

ECLASS

	ECLASS-13.0	27440217	
	ECLASS-15.0	27440217	
ETIM			
	ETIM 9.0	EC000438	
	ICDCC		
Uľ	NSPSC		
	UNSPSC 21.0	39121400	



1417392

https://www.phoenixcontact.com/us/products/1417392

Environmental product compliance

EU RoHS

20 1010	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%
EF3.0 Climate Change	
CO2e kg	0.343 kg CO2e

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com