

SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting



1420808
<https://www.phoenixcontact.com/us/products/1420808>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, Socket, straight-Standard, A-coding, on free cable end, Individual wires, cable length: 0.085 m, 0.34 mm², potted

Commercial data

Item number	1420808
Packing unit	1 pc
Minimum order quantity	50 pc
Product key	ABQCXE
GTIN	4055626243979
Weight per piece (including packing)	17.1 g
Weight per piece (excluding packing)	16.848 g
Country of origin	DE

SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting



1420808

<https://www.phoenixcontact.com/us/products/1420808>

Technical data

Notes

Order information:	Lock nut is included in the scope of delivery
Safety note	
Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.• The products are suitable for applications in plant, controller, and electrical device engineering.• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.• Assembled products may not be manipulated or improperly opened.• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).• When using the product in direct connection with third-party manufacturers, the user is responsible.• For operating voltages > 50 V AC, conductive connector housings must be grounded• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none">o On the producto On the packing labelo In the supplied documentationo Online at phoenixcontact.com/products under the product• Only use tools recommended by Phoenix Contact• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products• Ensure that the protective or functional ground has been properly connected.• VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting



1420808

<https://www.phoenixcontact.com/us/products/1420808>

- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Mounting

Mounting type	Rear mounting (Pg9)
Tightening torque	2 Nm ... 3 Nm

Product properties

Product type	Circular connectors (device side)
Application	Signal
Number of positions	5
Coding	A
Thread type	M12

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Material Molding compound	PUR (potted)
---------------------------	--------------

Electrical properties

Rated surge voltage	1.5 kV AC
Nominal voltage U_N	60 V
Nominal current I_N	4 A

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross-section	0.34 mm ²
Tightening torque	2 Nm ... 3 Nm

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head locking type	Standard
Coding	A

Connection 2

Head design	free cable end
-------------	----------------

SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting



1420808

<https://www.phoenixcontact.com/us/products/1420808>

Cable/line

Cable length	0.085 m
Cable cross section	0.34 mm²

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65/IP67/IP69/IP69K
	IP65/IP67/IP69K
Ambient temperature (operation)	-25 °C ... 85 °C
UL Type Rating	Type 4 (indoor use only)

Standards and regulations

Standard designation	M12 circular connector
Standards/specifications	according to IEC 61076-2-101


SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting

1420808

<https://www.phoenixcontact.com/us/products/1420808>

Drawings

Schematic diagram

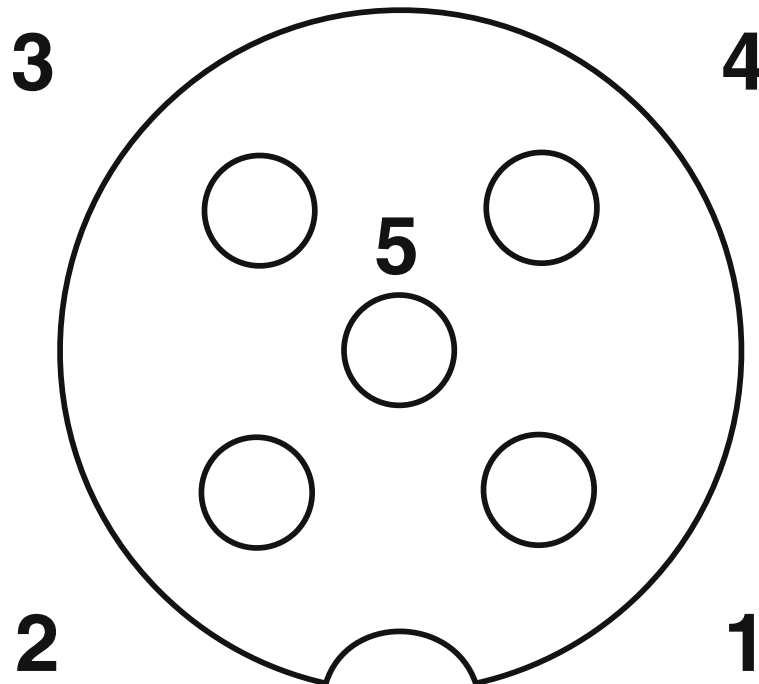

Pin assignment M12 socket, 5-pos., A-coded, socket side view

SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting



1420808

<https://www.phoenixcontact.com/us/products/1420808>

Classifications

ECLASS

ECLASS-13.0	27440103
ECLASS-15.0	27440103

ETIM

ETIM 9.0	EC003570
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACC-DSI-FS-5P-PG9/0,085VA TIN - Device connector rear mounting



1420808
<https://www.phoenixcontact.com/us/products/1420808>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com