

https://www.phoenixcontact.com/us/products/1636350



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 6+12+PE, size: B16, power contacts: 6, control contacts: 12, Pin, Axial screw connection, 690 V, 40 A, 2.5 mm<sup>2</sup> ... 10 mm<sup>2</sup>, application: Power/signal

## Your advantages

• Shock and vibration-resistant in accordance with DIN EN 61373

#### Commercial data

Item number	1636350
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	AF7ABA
GTIN	4046356011495
Weight per piece (including packing)	150.8 g
Weight per piece (excluding packing)	146.5 g
Customs tariff number	85366990
Country of origin	DE

1636350

https://www.phoenixcontact.com/us/products/1636350



### Technical data

#### Notes

General	For HEAVYCON ADVANCE and HEAVYCON housing of type B16/B32, axial connection for 2 mm Allen wrench
General	Connectors may be operated only when there is no load/voltage.
General	The axial screw connection must be established using a 2 mm Allen key (for stranded conductors only)

### Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
	Note regarding axial connection
	technology:
	Only for stranded wires. The specified conductor cross-sections refer to the geometric cross section of the cable used.  Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use.  The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating
	cable structures (e.g., Class 6 cables) must be checked before use.
	Assembly instructions
	Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off

before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be

must be tightened with maximum torque.

mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections

### Product properties

Product type	Contact insert with a fixed no. of positions	
Series	HC-K	
Application	Power/signal	
Туре	B16	
	B32	
Number of positions	18	
Connection profile	6+12+PE	
Contact numbering	1 - 6 (power contacts)	
	11 - 22 (control contacts)	
No. of power contacts	6	
No. of control contacts	12	
Contact material type	turned	



https://www.phoenixcontact.com/us/products/1636350



Screwdriver blade	0.5 x 3.5 mm (control contacts)
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

#### **Dimensions**

Dimensional drawing	77.5 84.5		
Width	34 mm		
Height	47.2 mm		
Length	84.5 mm		
Drill hole distance, horizontal	77.5 mm		
Mechanical characteristics			
Contact diameter	4 mm		

### Connection data

### Connection technology

Connection technology	Axial screw connection (power contacts)			
	Screw connection (control contacts)			
Conductor connection				
Conductor cross section	2.5 mm² 10 mm² (power contacts)			
	0.2 mm <sup>2</sup> 2.5 mm <sup>2</sup> (control contact)			
Connection cross section AWG	12 8 (power contacts)			
	24 14 (control contacts)			
Tightening torque	2 Nm 2.5 Nm (PE connection)			
	0.5 Nm 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)			
	0.5 Nm 0.8 Nm (control contacts)			
	1.5 Nm (Power 2.5 mm² 4 mm²)			
	2 Nm (Power 6 mm² 10 mm²)			
Stripping length of the individual wire	8 mm +1 mm (Power 6 mm² 10 mm²)			
	10 mm (Signal)			
	5 mm +1 mm (Power 2.5 mm <sup>2</sup> 4 mm <sup>2</sup> )			

## Electrical properties

Rated voltage (III/3)	690 V
	230 V (Conductor-PE)
	400 V (Signal contacts, conductor-conductor)
Rated voltage for power contacts	230/400 V



1636350

https://www.phoenixcontact.com/us/products/1636350

Ambient conditions

Ambient temperature (operation) (Operation)

Rated surge voltage	8 kV (power contacts)		
	4 kV (control contacts)		
Rated current	40 A (power contacts)		
	10 A (control contacts)		
Mechanical properties			
Mechanical data			
Insertion/withdrawal cycles	≥ 500		
Material specifications			
Flammability rating according to UL 94	V0		
Contact material	Cu alloy		
Contact carrier material	PC		
Material of contact surface, power contact	Ag		
Material of contact surface, control contact	Ag		
Environmental and real-life conditions			

-40 °C ... 125 °C


1636350


https://www.phoenixcontact.com/us/products/1636350



## Drawings


### Dimensional drawing

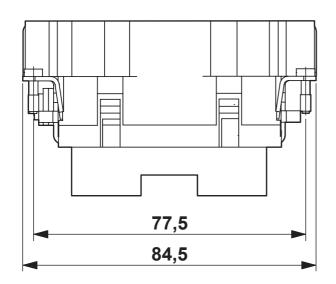

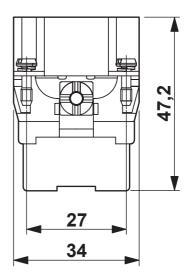

Dimensional drawing

### Dimensional drawing

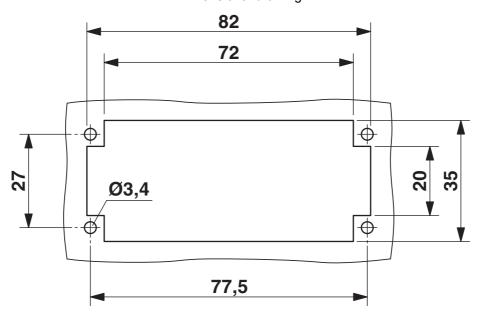


Mounting cutout when used without housing



https://www.phoenixcontact.com/us/products/1636350



### Schematic diagram

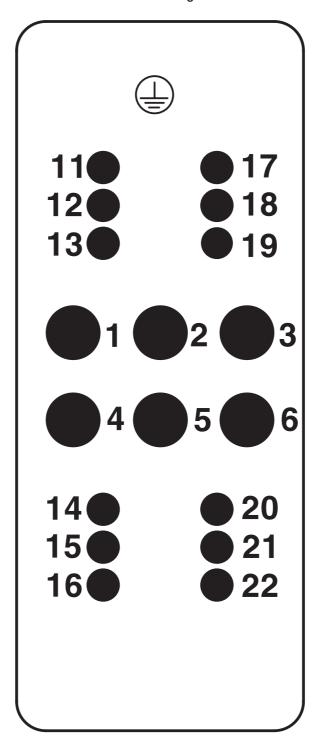


Connector pin assignment, connection side




1636350

https://www.phoenixcontact.com/us/products/1636350

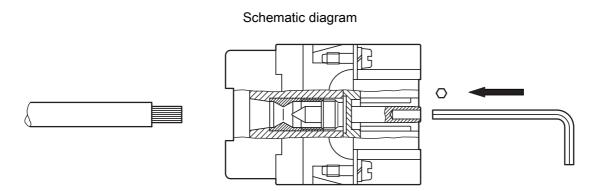

Axial connection

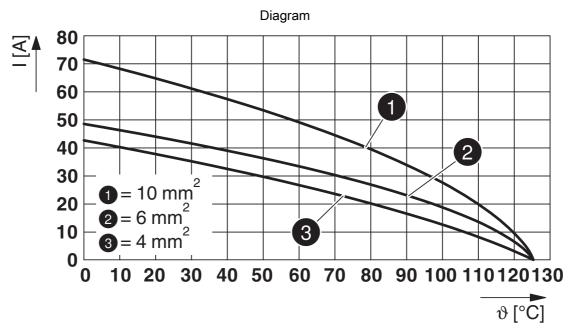

Derating curve



https://www.phoenixcontact.com/us/products/1636350



## **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1636350

. <b>91</b>	<b>cUL Recognized</b> Approval ID: E118976				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
		690 V	40 A	14 - 8	-

<b>7.1</b>	<b>UL Recognized</b> Approval ID: E118976				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
		690 V	40 A	14 - 8	-



1636350

https://www.phoenixcontact.com/us/products/1636350

## Classifications

### **ECLASS**

	ECLASS-13.0	27440205
	ECLASS-15.0	27440205
	TIM	
_ I	IIVI	
	ETIM 9.0	EC000438
U	NSPSC	
	UNSPSC 21.0	39121500



https://www.phoenixcontact.com/us/products/1636350



## Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	74fcb622-4f5d-4480-af09-547ca54c4943
EF3.0 Climate Change	
CO2e kg	9.632 kg CO2e

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com