

1607154

https://www.phoenixcontact.com/us/products/1607154

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert set, Range of articles: VARIOCON, design: VC2, number of positions: 6, rated voltage: 400, rated current: 20~A

Your advantages

- Proven COMBICON technology
- · Universal connection
- Can be keyed to prevent incorrect connection

Commercial data

Item number	1607154
Packing unit	5 pc
Minimum order quantity	1 pc
Sales key	AB01
Product key	ABLADA
GTIN	4017918940935
Weight per piece (including packing)	43.32 g
Weight per piece (excluding packing)	38.365 g
Customs tariff number	85366990
Country of origin	PL



1607154

https://www.phoenixcontact.com/us/products/1607154

Technical data

Notes

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
 The products must be regularly inspected for damage.
 Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that the protective or functional ground has been properly connected.
- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
- Operate the connector only when it is fully plugged in.
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the



1607154

Width

https://www.phoenixcontact.com/us/products/1607154

	standards.
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
roduct properties	
Product type	Contact insert
Product family	VARIOCON
Series	VC-D
Туре	VC2
Number of positions	6
Connection profile	5+PE
Number of module slots	3
Insulation characteristics	
Degree of pollution	3
ectrical properties	
Rated voltage (II/2)	250 V
Rated voltage (III/2)	160 V
Rated voltage (III/3)	400 V
	400 V
Nominal voltage ATD	400
Rated surge voltage	6 kV
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage	6 kV
Rated current	20 A
	20 A
	20 A
Nominal voltage U _N	400 V
onnection data	
Tightening torque	0.5 0.6 Nm
Conductor cross-section flexible	0.2 mm² 1.5 mm²
Conductor cross-section rigid	0.2 mm² 2.5 mm²
imensions	
Dimensional drawing	65,2

65.2 mm



1607154

https://www.phoenixcontact.com/us/products/1607154

Height	27.5 mm
Length	50 mm
laterial specifications	
Color of the housing part	black
Material Housing	PA 6.6
Material	Polyamide (Sleeve frame)
Material Contact carrier	PA 6.6
Material Contact	SF-Cu
Flammability rating according to UL 94	V0
Insulating material group	I
Contact surface material	tin-plated
able/line	
Stripping length of the individual wire	7 mm
Stripping length of the individual wife	7 111111
lechanical properties	
F. 5F 51 1155	
Mechanical data	
Insertion/withdrawal cycles	≥ 100
nvironmental and real-life conditions	
Ambient conditions	




1607154


https://www.phoenixcontact.com/us/products/1607154

Drawings

Dimensional drawing

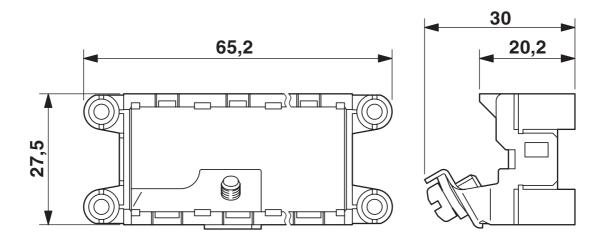

Functional drawing

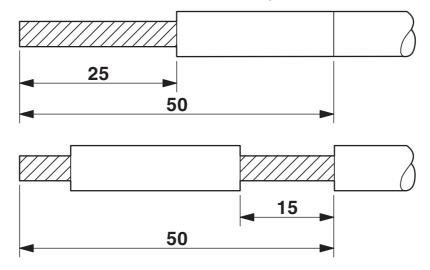



1607154

https://www.phoenixcontact.com/us/products/1607154

Classifications

ECLASS

	ECLASS-13.0	27440192			
	ECLASS-15.0	27440192			
ETIM					
	ETIM 9.0	EC002943			
UNSPSC					
	UNSPSC 21.0	39121400			



1607154

https://www.phoenixcontact.com/us/products/1607154

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions			
China RoHS				
Environment friendly use period (EFUP)	EFUP-E			
	No hazardous substances above the limits			
EU REACH SVHC				
REACH candidate substance (CAS No.)	No substance above 0.1 wt%			

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com