

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229
<https://www.phoenixcontact.com/us/products/1627229>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect, Type 2, Infrastructure charging socket, 32 A , 480 V AC, Single wires, length: 1.5 m, Front and rear mounting, for charging electric vehicles (EV) with alternating current (AC), PHOENIX CONTACT logo, IEC 62196-2, NOTE This product version does not include a locking actuator.

Product description

Infrastructure charging socket for charging electric vehicles (EV) with alternating current (AC), compatible with type 2 Infrastructure Plugs, for installation at charging stations for E-Mobility (EVSE)

Your advantages

- Complete product range
- Uniform, space-saving installation space
- Available with your logo on request - for consistent branding of your charging station
- Integrated interlock during charging
- Manual emergency release of the locking actuator
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001

Commercial data

Item number	1627229
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	XWBADC
GTIN	4055626313061
Weight per piece (including packing)	845 g
Weight per piece (excluding packing)	774 g
Country of origin	PL

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket



1627229

<https://www.phoenixcontact.com/us/products/1627229>

Technical data

Notes

General	NOTE This product version does not include a locking actuator.
General	Make sure that the Infrastructure Plug is locked into the Infrastructure Socket Outlet during the charging process according to IEC 61851-1. We recommend using our locking actuators (1624129, 1622317). If another type of locking is selected, we recommend sealing the mounting surface (1621465), see also accessories.

Product properties

Product type	Infrastructure charging socket
Product family	CHARX connect
Application	for charging electric vehicles (EV) with alternating current (AC) compatible with infrastructure charging plugs
Charging standard	Type 2
Charging mode	Mode 3, Case B
Affixed logo	PHOENIX CONTACT logo
Customer variations	On request

Electrical properties

Type of signal transmission	Pulse width modulation
Note on the connection method	Crimp connection, cannot be disconnected

Charging power and current (AC charging (3-phase))

Type of charging current	AC 3-phase
Charging current	32 A AC (3-phase)
Charging power	26.6 kW (3-phase)
Charging power rating	22 kW (32 A, 3-phase)
Rated voltage	480 V

Pin assignment (Leistungskontakte)

Number	5 (L1, L2, L3, N, PE)
Rated voltage	480 V AC
Rated current	32 A

Pin assignment (Signalkontakte)

Number	2 (CP, PP)
Rated voltage	30 V AC
Rated current	2 A

Locking actuator

Locking actuator	without locking actuator
------------------	--------------------------


EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket



1627229

<https://www.phoenixcontact.com/us/products/1627229>

Dimensions

Dimensional drawing	
Max. wall thickness	max. 50.00 mm (Rear panel mounting, normative maximum specification for infrastructure plug) max. 28.00 mm (Rear mounting, normative maximum specification for infrastructure plug when using protective cover 1405217) max. 10.00 mm (Front mounting, when using the locking mechanism)
Bore dimensions	60 mm x 60 mm

Cable/line

Cable length	1.5 m
Cable type	Single wires
Cable structure	5x 6.0 mm ² + 2x 0.5 mm ²

Mechanical properties

Mechanical data	
Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N

Environmental and real-life conditions

Ambient conditions	
Degree of protection (Infrastructure charging socket)	IP44 (plugged in)
Degree of protection (Protective cover)	IP54 (see accessories)
Ambient temperature (operation)	-30 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	5000 m (above sea level)

Standards and regulations

Standards	
Standards/regulations	IEC 62196-2

Mounting

Mounting type Infrastructure charging socket	Front and rear mounting (0 to 90 degree frontal inclination possible)
--	---

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket



1627229
<https://www.phoenixcontact.com/us/products/1627229>

Mounting type Protective cover	front (available separately)
Mounting hole diameter	7.00 mm (ø)

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket




1627229

<https://www.phoenixcontact.com/us/products/1627229>

Drawings

Dimensional drawing

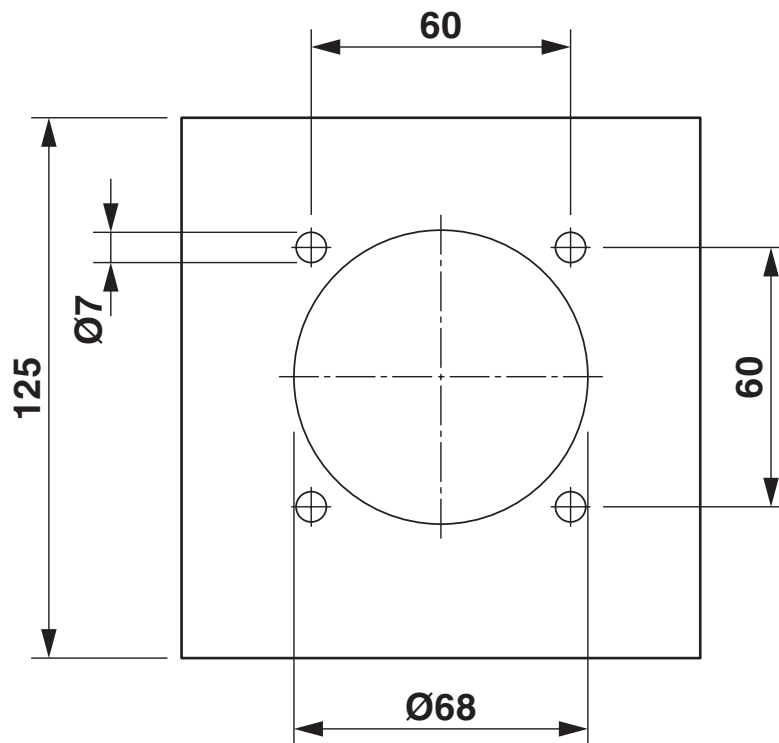


Hole image

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229


<https://www.phoenixcontact.com/us/products/1627229>

Dimensional drawing

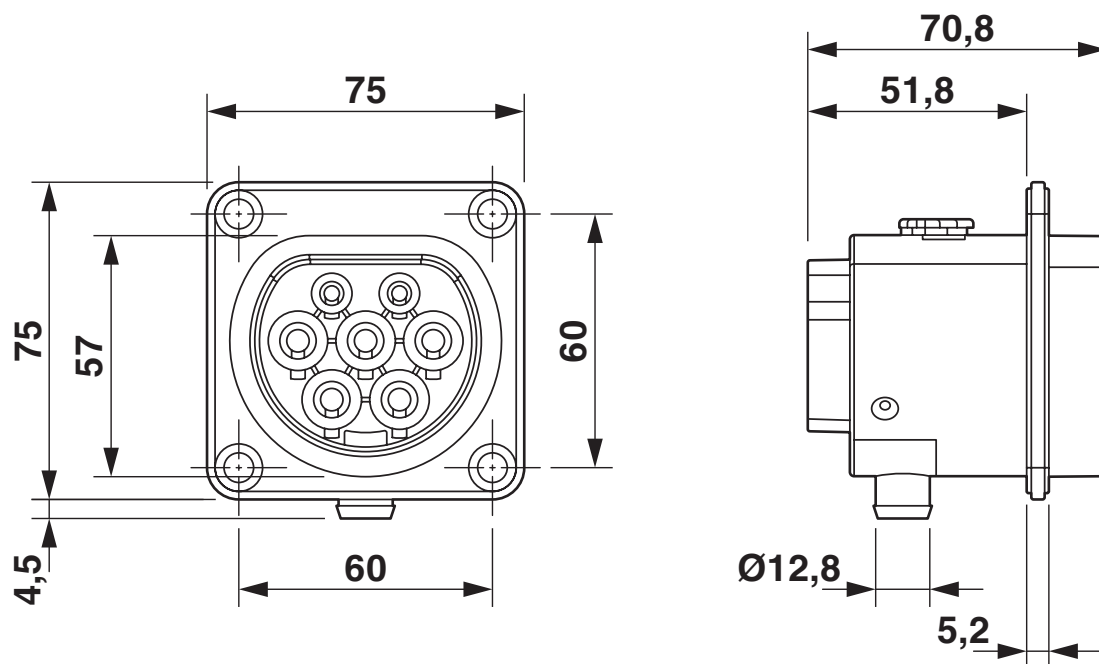

Dimensional drawing

Connection diagram

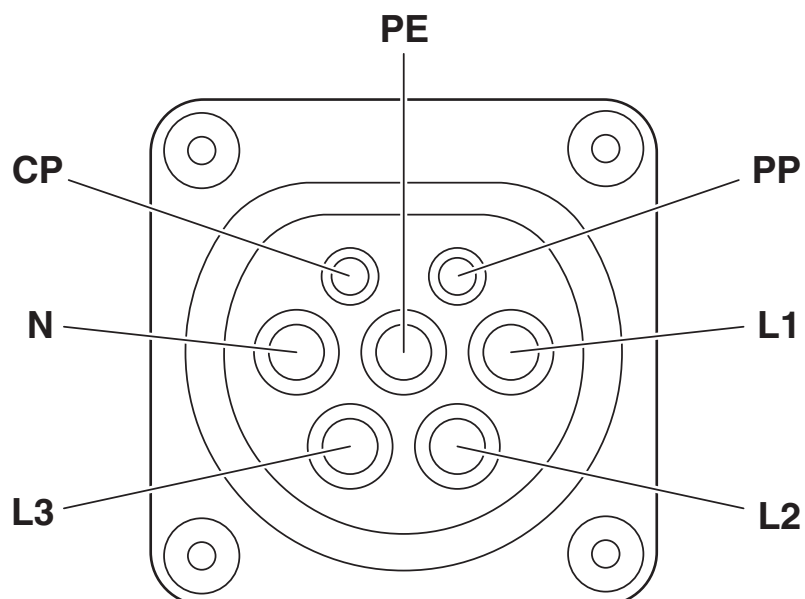


Pin assignment of infrastructure charging socket

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229

<https://www.phoenixcontact.com/us/products/1627229>

Schematic diagram

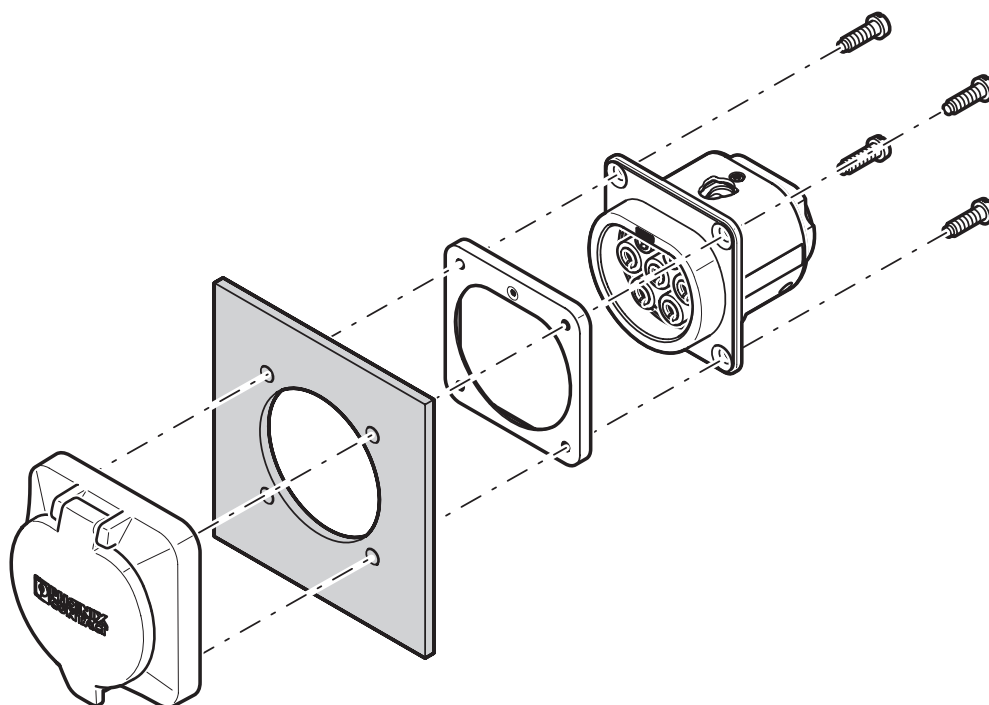

Rear mounting with rear protective cover screw connection


The screw connection for a protective cover from the accessories range (EV-T2SC) only supports rear mounting. The panel thickness must not exceed 5 mm. The sealing frame that is slid on from the rear must contact the housing panel flush with the flat side and must completely surround the infrastructure socket outlet.

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229

<https://www.phoenixcontact.com/us/products/1627229>

Schematic diagram

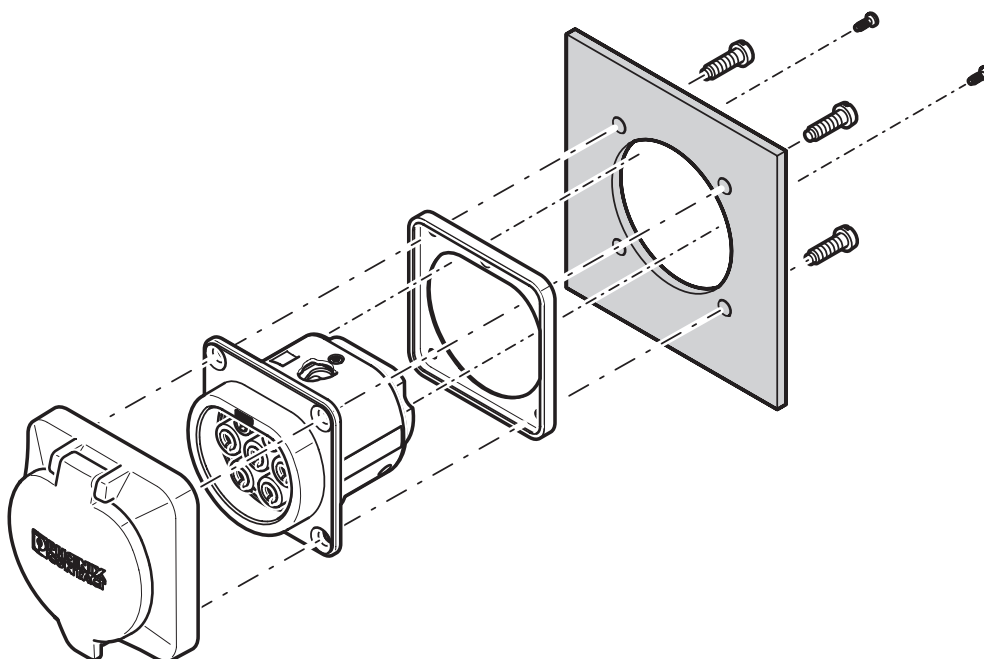

Front mounting with rear protective cover screw connection

Front mounting is only possible when the locking actuator is removed.


The screw connection for a protective cover from the accessories range (EV-T2SC) only supports rear mounting. The panel thickness must not exceed 10 mm. The sealing frame that is slid on from the front must contact the housing panel flush with the flat side and must completely surround the infrastructure socket outlet.

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229

<https://www.phoenixcontact.com/us/products/1627229>

Schematic diagram

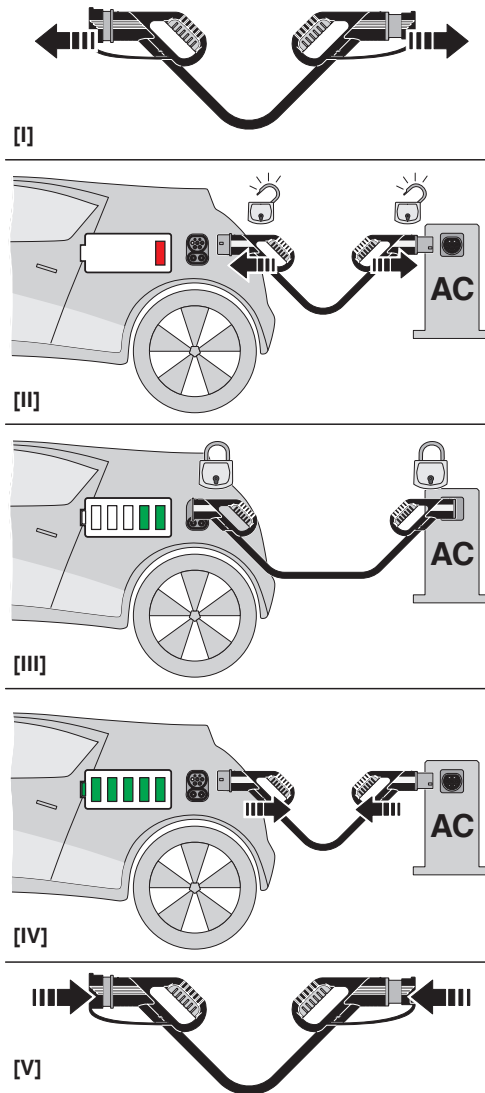


Operating instructions

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229


<https://www.phoenixcontact.com/us/products/1627229>

Schematic diagram

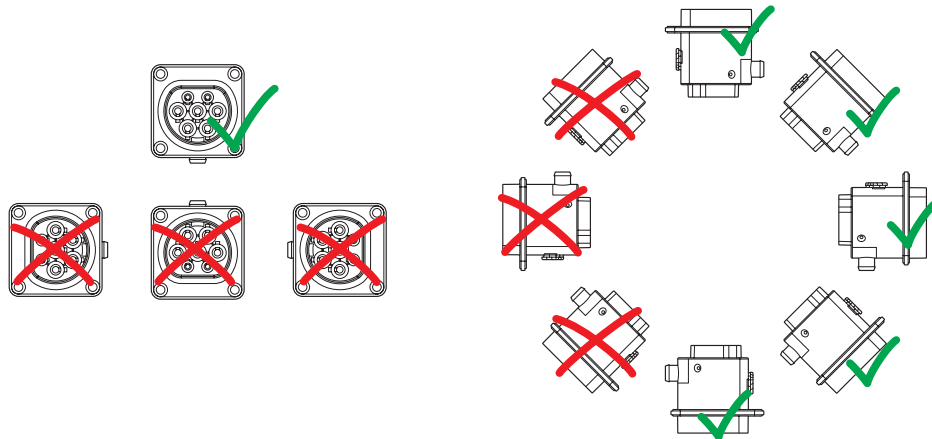

Installation positions

Schematic diagram

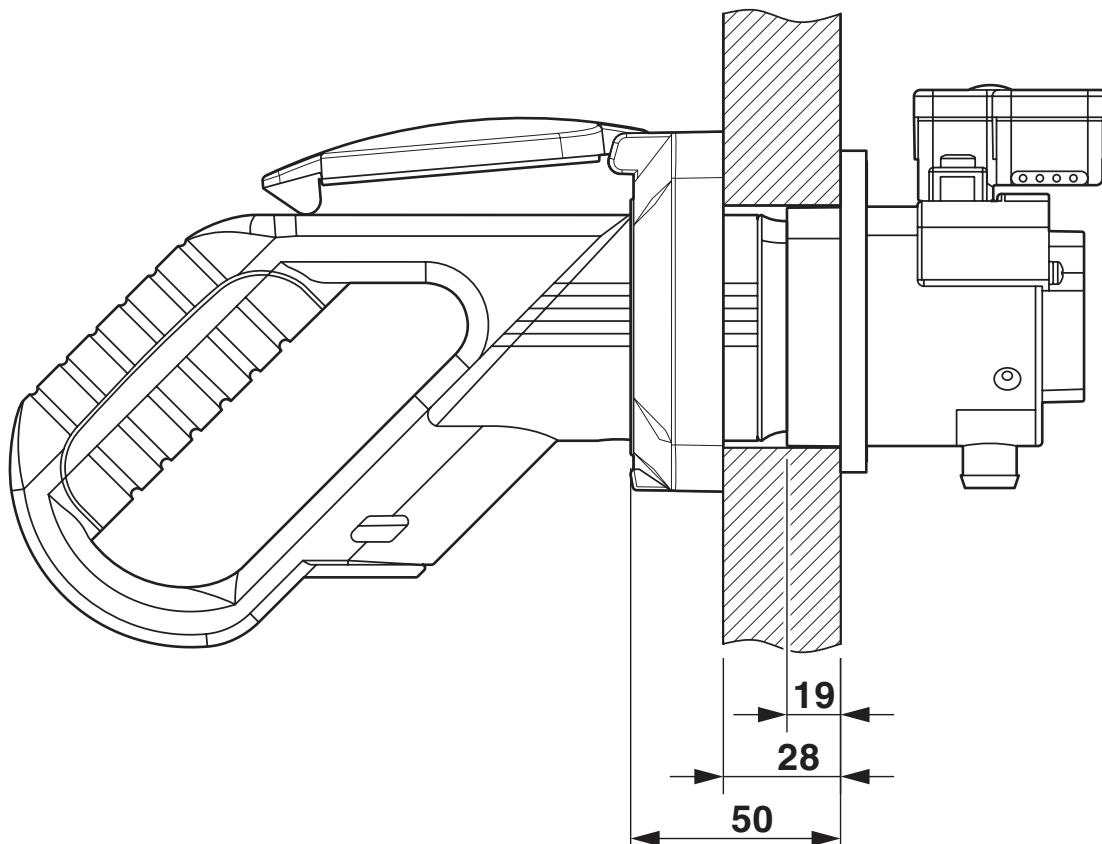


Panel thickness for rear mounting (max. 50 mm, with Phoenix Contact protective cover, max. 22 mm)

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket

1627229

<https://www.phoenixcontact.com/us/products/1627229>

Schematic diagram

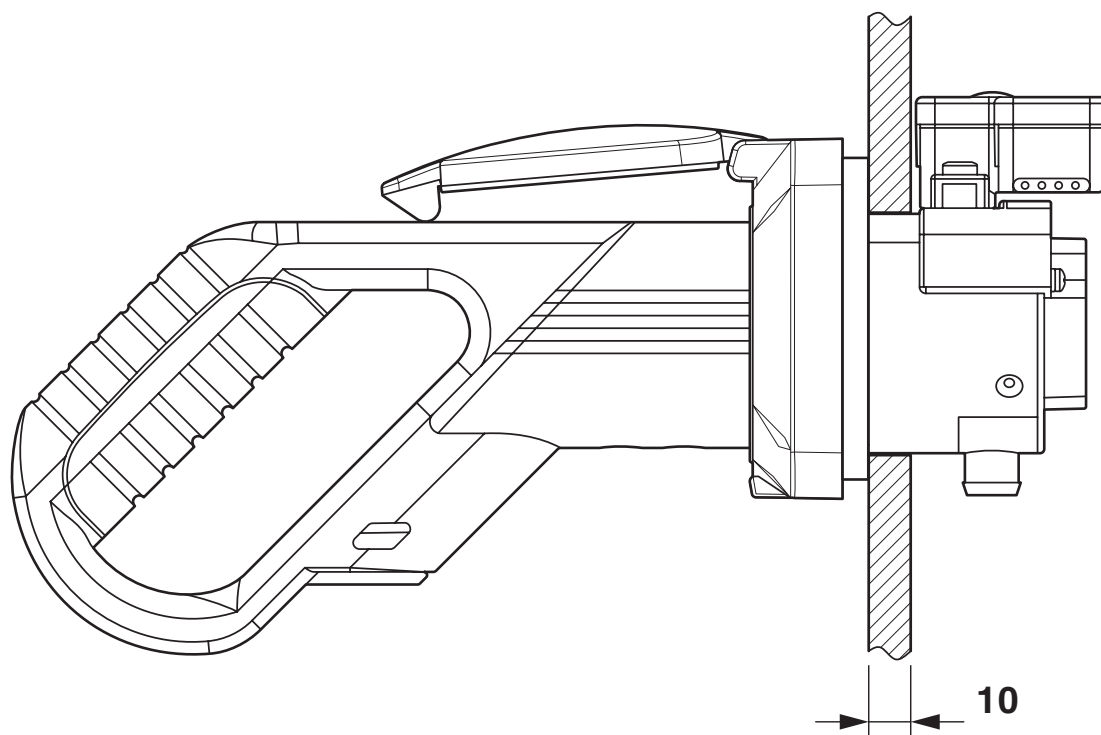

Panel thickness for front mounting (in mm)

EV-T2M3S-3AC32A-1,5M6,0E00 - Infrastructure charging socket



1627229
<https://www.phoenixcontact.com/us/products/1627229>

Classifications

UNSPSC

UNSPSC 21.0	39121522
-------------	----------

1627229
<https://www.phoenixcontact.com/us/products/1627229>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Not applicable, No electrical and electronic equipment (EEE), cannot be used in EEE
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com