

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Hybrid motor starter; functions: Start motor, Reverse motor, Motor protection (class 10A), Emergency stop, Higher resistance to transient voltages, ATEX; input: 24 V DC; output: 3~, 500 V AC, 600 mA; Push-in connection

## Your advantages

- 22.5 mm wide
- Safety level in accordance with IEC 61508-1: SIL 3, ISO 13849: PL e
- Reduction in wiring
- Space saving
- Long service life
- 3-phase loop bridges
- Adjustable current for bimetal function
- Low-wear switching

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2906058       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | C470          |
| Product key                          | DK7412        |
| GTIN                                 | 4055626024615 |
| Weight per piece (including packing) | 300.49 g      |
| Weight per piece (excluding packing) | 269.6 g       |
| Customs tariff number                | 85371098      |
| Country of origin                    | DE            |

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

## Technical data

### Product properties

|                |                       |
|----------------|-----------------------|
| Product type   | Hybrid motor starters |
| Product family | CONTACTRON            |
| Operating mode | 100% operating factor |

### Electrical properties

|                                                 |                         |
|-------------------------------------------------|-------------------------|
| Number of phases                                | 3                       |
| Motor starter type                              | Reversing starter       |
| Switching frequency                             | ≤ 2 Hz (Load-dependent) |
| Maximum power dissipation for nominal condition | 0.4 W                   |
| Switching frequency                             | ≤ 2 Hz (Load-dependent) |
| Maximum power dissipation                       | 1.5 W                   |
| Minimum power dissipation                       | 1.1 W                   |
| Coordination type                               | 1                       |

### Supply

|                                            |                             |
|--------------------------------------------|-----------------------------|
| Rated control circuit supply voltage $U_S$ | 24 V DC                     |
| Control supply voltage range               | 19.2 V DC ... 30 V DC       |
| Rated control supply current $I_S$         | 40 mA                       |
| Protective circuit                         | Surge protection            |
|                                            | Reverse polarity protection |

### Insulation characteristics

|                                                                                                                            |                                                                           |
|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Rated insulation voltage                                                                                                   | 500 V                                                                     |
| Rated surge voltage                                                                                                        | 6 kV                                                                      |
| Overvoltage category                                                                                                       | III                                                                       |
| Degree of pollution                                                                                                        | 2                                                                         |
| Insulation characteristics between the control input and control supply voltage, and auxiliary circuit to the main circuit | Safe isolation (IEC 60947-1/EN 50178) at operating voltage ≤ 300 V AC     |
|                                                                                                                            | Basic insulation (IEC 60947-1) at operating voltage 300 V AC ... 500 V AC |
|                                                                                                                            | Safe isolation (EN 50178) at operating voltage 300 ... 500 V AC           |
| Isolation characteristics between the control input and control supply voltage to auxiliary circuit                        | Safe isolation (IEC 60947-1) in the auxiliary circuit ≤ 300 V AC          |
|                                                                                                                            | Safe isolation (EN 50178) in the auxiliary circuit ≤ 300 V AC             |

## Input data

### Control

|                               |                          |
|-------------------------------|--------------------------|
| Input name                    | Control input right/left |
| Rated actuating voltage $U_C$ | 24 V DC                  |
| Triggering voltage range      | 19.2 V DC ... 30 V DC    |
| Rated actuating current $I_C$ | 5 mA                     |
| Switching threshold           | 9.6 V ("0" signal)       |

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

|                       |                               |
|-----------------------|-------------------------------|
|                       | 19.2 V ("1" signal)           |
| Switching level       | < 5 V DC (For EMERGENCY STOP) |
| Typical turn-off time | < 30 ms                       |
| Protective circuit    | Reverse polarity protection   |

## Output data

### AC output

|                                                   |                                    |
|---------------------------------------------------|------------------------------------|
| Rated operating voltage $U_e$                     | 500 V AC                           |
| Operating voltage range                           | 42 V AC ... 550 V AC               |
| Rated operating current $I_e$                     | 0.6 A (AC-51)<br>0.6 A (AC-53a)    |
| Mains frequency                                   | 50/60 Hz                           |
| Load current range                                | 75 mA ... 600 mA (see to derating) |
| Trigger characteristic in acc. with IEC 60947-4-2 | Class 10A                          |
| Cooling time                                      | 20 min                             |
| Leakage current                                   | 0 mA                               |
| Protective circuit                                | Surge protection                   |

### Acknowledge output

|                                                     |                                                            |
|-----------------------------------------------------|------------------------------------------------------------|
| Note                                                | Confirmation: floating change-over contact, signal contact |
| Contact switching type                              | 1 changeover contact                                       |
| Switching capacity in accordance with IEC 60947-5-1 | 3 A (230 V, AC15)<br>2 A (24 V (DC13))                     |

## Connection data

### Control circuits

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Push-in connection                          |
| Stripping length                 | 10 mm                                       |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 14                                   |

### Load circuit

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Connection method                | Push-in connection                          |
| Stripping length                 | 10 mm                                       |
| Conductor cross-section rigid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross-section AWG      | 24 ... 14                                   |

## Signaling

|                           |              |
|---------------------------|--------------|
| Status display            | LED (yellow) |
| Operating voltage display | Green LED    |
| Error indication          | Red LED      |

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

## Dimensions

|        |          |
|--------|----------|
| Width  | 22.5 mm  |
| Height | 107.5 mm |
| Depth  | 114 mm   |

## Material specifications

|                                                  |              |
|--------------------------------------------------|--------------|
| Flammability rating according to UL 94 (Housing) | V0 (Housing) |
|--------------------------------------------------|--------------|

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                   |
|-----------------------------------------|-----------------------------------|
| Degree of protection                    | IP20                              |
| Ambient temperature (operation)         | 5 °C ... 70 °C (observe derating) |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C                  |
| Altitude                                | ≤ 2000 m                          |

## Approvals

### ATEX

|                |                                  |
|----------------|----------------------------------|
| Identification | ⚡ II (2) G [Ex e] [Ex d] [Ex px] |
|                | ⚡ II (2) D [Ex t] [Ex p]         |
| Certificate    | PTB 07 ATEX 3145                 |

### UL approval

|             |              |
|-------------|--------------|
| Certificate | NLDX.E228652 |
|-------------|--------------|

### Safety Integrity Level (SIL, IEC 61508)

|                |               |
|----------------|---------------|
| Identification | ≤ 3           |
| Note           | Safe shutdown |

### Safety Integrity Level (SIL, IEC 61508)

|                |                  |
|----------------|------------------|
| Identification | 2                |
| Note           | Motor protection |

### Performance Level (ISO 13849)

|                |               |
|----------------|---------------|
| Identification | ≤ e           |
| Note           | Safe shutdown |

### Category (ISO 13849)

|                |               |
|----------------|---------------|
| Identification | ≤ 3           |
| Note           | Safe shutdown |

### UL data

|                    |                                                                   |
|--------------------|-------------------------------------------------------------------|
| SCCR               | 100 kA (500 V AC (fuse: 30 A class CC/30 A class J (high fault))) |
|                    | 5 kA (500 V AC (fuse: 20 A RK5 (standard fault)))                 |
| FLA                | 0.6 A (500 V AC)                                                  |
| Group installation | 20 A (class RK5, SCCR 5kA, #24 - 14 AWG max. solid and stranded)  |

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

|               |                                                                        |
|---------------|------------------------------------------------------------------------|
|               | 30 A (class CC or J, SCCR 100kA, #24 - 14 AWG max, solid and stranded) |
| Category code | NLDX / NRNT                                                            |

## Standards and regulations

### Standards/regulations

|                       |              |
|-----------------------|--------------|
| Standards/regulations | IEC 60947-1  |
|                       | EN 60947-4-2 |
|                       | IEC 61508    |
|                       | ISO 13849    |

## Mounting

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Mounting type     | DIN rail mounting                                  |
| Assembly note     | alignable, for spacing see derating                |
| Mounting position | vertical (horizontal DIN rail, motor output below) |

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter




2906058

<https://www.phoenixcontact.com/us/products/2906058>

## Drawings

Diagram

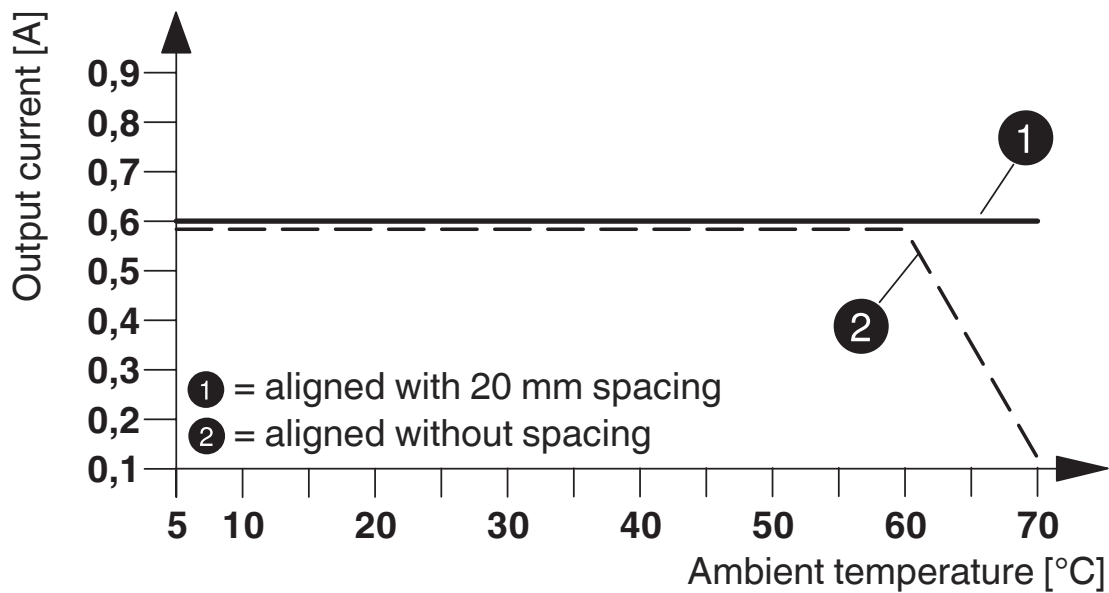

Derating curve

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2906058>



**EAC**

Approval ID: RU\*C-DE.\*08.B.00520\*



**UL Listed**

Approval ID: E228652



**CCC**

Approval ID: 2016010304871315



**cUL Listed**

Approval ID: E228652



**ATEX**

Approval ID: PTB 07 ATEX 3145

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058  
<https://www.phoenixcontact.com/us/products/2906058>

## Classifications

### ECLASS

|                   |          |
|-------------------|----------|
| ECLASS-13.0       | 27370905 |
| ECLASS-15.0       | 27370905 |
| ECLASS-15.0 ASSET | 27250101 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001037 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 25173900 |
|-------------|----------|

# ELR H5-IES-PT-24DC/500AC-06-T - Hybrid motor starter



2906058

<https://www.phoenixcontact.com/us/products/2906058>

## Environmental product compliance

### EU RoHS

|                                         |              |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 27f1b932-4fcd-480c-8a87-a51dbefeadee |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)