3RT2035-3AK64-3MA0

Data sheet



power contactor, AC-3e/AC-3, 41 A, 18.5 kW / 400 V, 3-pole, 110 V AC, 50 Hz / 120 V, 60 Hz, auxiliary contacts: 2 NO + 2 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal, size: S2, captive auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
 function module for communication 	No
auxiliary switch	No
power loss [W] for rated value of the current	
 at AC in hot operating state 	6.6 W
 at AC in hot operating state per pole 	2.2 W
 without load current share typical 	6.5 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	690 V
 of auxiliary circuit with degree of pollution 3 rated value 	690 V
surge voltage resistance	
of main circuit rated value	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	9.8g / 5 ms, 6.5g / 10 ms
shock resistance with sine pulse	
• at AC	15.3g / 5 ms, 10.1g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Weight	1.08 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

ain circuit		
number of poles for main current circuit	3	
number of NO contacts for main contacts	3	
operating voltage		
 at AC-3 rated value maximum 	690 V	
 at AC-3e rated value maximum 	690 V	
operational current		
 at AC-1 at 400 V at ambient temperature 40 °C rated value 	60 A	
• at AC-1		
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	60 A	
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	55 A	
• at AC-3		
— at 400 V rated value	41 A	
— at 500 V rated value	41 A	
— at 690 V rated value	24 A	
• at AC-3e		
— at 400 V rated value	41 A	
— at 500 V rated value	41 A	
— at 690 V rated value	24 A	
• at AC-4 at 400 V rated value	35 A	
• at AC-5a up to 690 V rated value	52.8 A	
• at AC-5b up to 400 V rated value	33.2 A	
• at AC-6a		
 up to 230 V for current peak value n=20 rated value 	36.5 A	
up to 400 V for current peak value n=20 rated value	36.5 A	
 up to 500 V for current peak value n=20 rated value 	36.5 A	
 up to 690 V for current peak value n=20 rated value 	24 A	
• at AC-6a		
 up to 230 V for current peak value n=30 rated value 	24.2 A	
 up to 400 V for current peak value n=30 rated value 	24.2 A	
 up to 500 V for current peak value n=30 rated value 	24.2 A	
— up to 690 V for current peak value n=30 rated value	24 A	
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm²	
operational current for approx. 200000 operating cycles at AC-4		
• at 400 V rated value	22 A	
at 690 V rated value	18.5 A	
operational current		
at 1 current path at DC-1		
— at 24 V rated value	55 A	
— at 60 V rated value	23 A	
— at 110 V rated value	4.5 A	
— at 220 V rated value	1 A	
— at 440 V rated value	0.4 A	
— at 600 V rated value	0.25 A	
 with 2 current paths in series at DC-1 		
— at 24 V rated value	55 A	
— at 60 V rated value	45 A	
— at 110 V rated value	45 A	
— at 220 V rated value	5 A	
— at 440 V rated value	1 A	
— at 600 V rated value	0.8 A	
 with 3 current paths in series at DC-1 		
— at 24 V rated value	55 A	
— at 60 V rated value	55 A	
— at 110 V rated value	55 A	
— at 220 V rated value	45 A	
— at 440 V rated value	2.9 A	

.4 A
5 A
S A
A
).1 A
0.06 A
5 A
5 A
5 A
5 A
0.27 A
1.16 A
55 A
55 A
55 A
55 A
1.6 A
0.35 A
8.5 kW
1 kW
8.5 kW
22 kW
2 kW
- ····
1 kW
8.5 kW
22 kW
2 kW
LIVY
1.6 kW
6.8 kW
4.5 kVA
25.2 kVA
1.6 kVA
8.6 kVA
0.6 kVA
6.8 kVA
1 kVA
28.6 kVA
43 A; Use minimum cross-section acc. to AC-1 rated value
96 A; Use minimum cross-section acc. to AC-1 rated value
00 A; Use minimum cross-section acc. to AC-1 rated value
241 A; Use minimum cross-section acc. to AC-1 rated value
96 A; Use minimum cross-section acc. to AC-1 rated value
96 A; Use minimum cross-section acc. to AC-1 rated value
96 A; Use minimum cross-section acc. to AC-1 rated value 5 000 1/h
5 000 1/h
000 1/h 200 1/h

at AC-4 maximum	300 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	110 V
at 60 Hz rated value	120 V
operating range factor control supply voltage rated value of	
magnet coil at AC	0.0 4.4
• at 50 Hz • at 60 Hz	0.8 1.1 0.8 1.1
apparent pick-up power of magnet coil at AC	0.0 1.1
• at 50 Hz	212 VA
• at 60 Hz	188 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.69
• at 60 Hz	0.65
apparent holding power of magnet coil at AC	
● at 50 Hz	18.5 VA
• at 60 Hz	16.5 VA
inductive power factor with the holding power of the coil	
● at 50 Hz	0.36
• at 60 Hz	0.39
closing delay	
• at AC	10 80 ms
opening delay	10 19 mg
• at AC	10 18 ms 10 20 ms
arcing time control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	Control of the Contro
design of the auxiliary switch	on the front, non-detachable
number of NC contacts for auxiliary contacts instantaneous	2
contact	
	2
contact number of NO contacts for auxiliary contacts instantaneous	
contact number of NO contacts for auxiliary contacts instantaneous contact	2
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum	2
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	2 10 A
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value	2 10 A 6 A
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value	2 10 A 6 A 3 A
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12	2 10 A 6 A 3 A 2 A 1 A
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value	2 10 A 6 A 3 A 2 A 1 A
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A
contact number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 115 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 115 V rated value • at 125 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 6 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7 A 7
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 220 V rated value • at 24 V rated value • at 300 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value operational current at DC-13 • at 24 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 120 V rated value • at 220 V rated value • at 220 V rated value • at 48 V rated value • at 48 V rated value • at 600 V rated value • at 48 V rated value • at 48 V rated value • at 48 V rated value • at 600 V rated value • at 600 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 24 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 110 V rated value • at 48 V rated value • at 400 V rated value • at 410 V rated value • at 410 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 20 V rated value • at 20 V rated value • at 220 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 120 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 70 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 120 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value operational current at DC-12 • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 26 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value • at 70 V rated value • at 110 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A 1 faulty switching per 100 million (17 V, 1 mA)
number of NO contacts for auxiliary contacts instantaneous contact operational current at AC-12 maximum operational current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value • at 600 V rated value • at 125 V rated value • at 125 V rated value • at 120 V rated value • at 220 V rated value • at 220 V rated value • at 24 V rated value • at 25 V rated value • at 25 V rated value • at 25 V rated value • at 27 V rated value • at 28 V rated value • at 29 V rated value • at 20 V rated value • at 30 V rated value • at 60 V rated value • at 60 V rated value • at 60 V rated value • at 70 V rated value • at 110 V rated value • at 125 V rated value • at 125 V rated value • at 120 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A 2 A 1 A 0.15 A 6 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A

yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	3 hp
— at 230 V rated value	7.5 hp
• for 3-phase AC motor	
 at 200/208 V rated value 	10 hp
 at 220/230 V rated value 	15 hp
 at 460/480 V rated value 	30 hp
— at 575/600 V rated value	40 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
design of the fuse link	
 for short-circuit protection of the main circuit 	
— with type of coordination 1 required	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	114 mm
width	55 mm
depth	178 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
 for grounded parts 	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	spring-loaded terminals
at contactor for auxiliary contacts	Spring-type terminals
of magnet coil	Spring-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
finely stranded with core end processing	2x (1 25 mm²), 1x (1 35 mm²)
for AWG cables for main contacts	2x (18 2), 1x (18 1)
connectable conductor cross-section for main contacts	(· ··-// ··· (· · · · · /
finely stranded with core end processing	1 35 mm²
connectable conductor cross-section for auxiliary contacts	33 11111
solid or stranded	0.5 2.5 mm²
	0.5 2.5 mm²
finely stranded with core end processing finely stranded without core and processing	
finely stranded without core end processing tune of compactable conductor error sections	0.5 2.5 mm ²
type of connectable conductor cross-sections	
 for auxiliary contacts 	

 — solid or stranded 	2x (0.5 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²)
 finely stranded without core end processing 	2x (0.5 2.5 mm²)
 for AWG cables for auxiliary contacts 	2x (20 14)
AWG number as coded connectable conductor cross section	
• for main contacts	18 1
 for auxiliary contacts 	20 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
suitable for safety function	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
 with low demand rate according to SN 31920 	40 %
 with high demand rate according to SN 31920 	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	
other	
Other	

Confirmation

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2035-3AK64-3MA0

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2035-3AK64-3MA0}\\$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AK64-3MA0

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2035-3AK64-3MA0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2035-3AK64-3MA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

 $\underline{\text{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RT2035-3AK64-3MA0\&objecttype=14\&gridview=view1}$







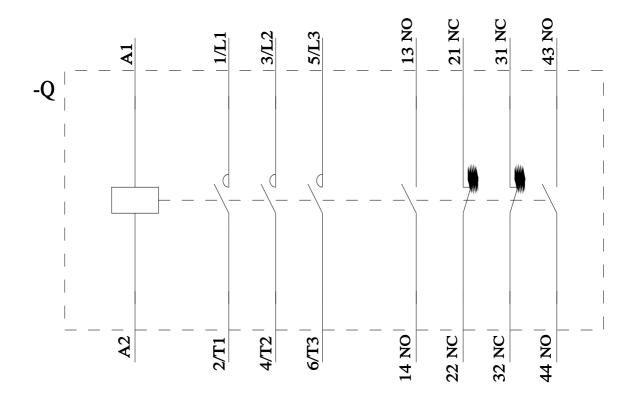

last modified:

4/17/2025

