## **SIEMENS**

Data sheet 3RV2811-1FD10





circuit breaker frame size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 no. 5-02 thermal overload release 5 A short-circuit release 104 A screw terminal standard switching capacity



product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For transformer protection according to UL 489/CSA C22.2 No.5
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	7.25 W
at AC in hot operating state per pole	2.4 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
of auxiliary contacts typical	100 000
electrical endurance (operating cycles) typical	100 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Weight	0.493 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	74.698 kg
global warming potential [CO2 eq] during manufacturing	1.98 kg
global warming potential [CO2 eq] during sales	0.134 kg
global warming potential [CO2 eq] during operation	72.7 kg
global warming potential [CO2 eq] after end of life	-0.116 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
Main circuit	
number of poles for main current circuit	3

Anna afairth an farmai	40
type of voltage for main current circuit	AC
operating voltage	20 000 1/
• rated value	20 690 V
at AC-3 rated value maximum	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	5 A
operational current	
• at AC-3 at 400 V rated value	5 A
at AC-3e at 400 V rated value	5 A
operating power	
• at AC-3	
— at 230 V rated value	1.1 kW
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	4 kW
• at AC-3e	
— at 230 V rated value	1.1 kW
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	4 kW
operating frequency	
• at AC-3 maximum	15 1/h
at AC-3e maximum	15 1/h
Auxiliary circuit	
type of voltage for auxiliary and control circuit	AC/DC
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
ground fault detection	No
phase failure detection	No
design of the overload release	thermal
maximum short-circuit current breaking capacity (lcu)	
at AC at 240 V rated value	100 kA
at AC at 400 V rated value	100 kA
at AC at 500 V rated value	100 kA
at AC at 690 V rated value	6 kA
at 480 AC Y/277 V according to UL 489 rated value	65 kA
operating short-circuit current breaking capacity (Ics) at AC	400 1.0
at 240 V rated value	100 kA
at 400 V rated value	100 kA
at 500 V rated value	100 kA
at 690 V rated value	4 kA
response value current of instantaneous short-circuit trip unit	104 A
Short-circuit protection	
	Vaa
product function short circuit protection	Yes
design of the short-circuit trip	Yes magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	magnetic gG 32 A
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	magnetic  gG 32 A gG 32 A
design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V	magnetic gG 32 A
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions	magnetic  gG 32 A gG 32 A gG 25 A
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position	magnetic  gG 32 A gG 32 A gG 25 A  any
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method	magnetic  gG 32 A gG 32 A gG 25 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height	magnetic  gG 32 A gG 32 A gG 25 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	magnetic  gG 32 A gG 32 A gG 25 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm 45 mm
design of the short-circuit trip  design of the fuse link for IT network for short-circuit protection of the main circuit  • at 400 V  • at 500 V  • at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height	magnetic  gG 32 A gG 32 A gG 25 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 144 mm

<ul> <li>for grounded parts at 400 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	30 mm
• for live parts at 400 V	30 11111
— downwards	30 mm
— upwards	30 mm
— at the side	30 mm
• for grounded parts at 500 V	30 11111
— downwards	30 mm
— upwards	30 mm
— at the side	30 mm
• for live parts at 500 V	00 11111
— downwards	30 mm
— upwards	30 mm
— at the side	30 mm
• for grounded parts at 690 V	33 11111
— downwards	70 mm
— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	70 mm
— upwards	70 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
• 101 Main current circuit	coron type terminale
arrangement of electrical connectors for main current	Top and bottom
arrangement of electrical connectors for main current circuit	
arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts	Top and bottom
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded	Top and bottom  1 10 mm², max. 2x 10 mm²
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm²
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts	Top and bottom  1 10 mm², max. 2x 10 mm²
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  of for main contacts  solid or stranded  finely stranded with core end processing  for AWG cables for main contacts  tightening torque	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals	Top and bottom  1 10 mm², max. 2x 10 mm²  1 16 mm², max. 6 + 16 mm²  2x (14 10)  2.5 3 N·m
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip	Top and bottom  1 10 mm², max. 2x 10 mm²  1 16 mm², max. 6 + 16 mm²  2x (14 10)  2.5 3 N·m
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes 10 a
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes 10 a
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes  40 %
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes  40 % 50 %
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes  40 % 50 % 5 000
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920  • with high demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes  40 % 50 % 5 000
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes  40 % 50 % 5 000 50 FIT
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  1 10 mm², max. 2x 10 mm² 1 16 mm², max. 6 + 16 mm² 2x (14 10)  2.5 3 N·m Diameter 5 to 6 mm Pozidriv size 2  M4  Yes  No Yes  10 a Yes  40 % 50 % 5 000 50 FIT

safety device type according to IEC 61508-2	Type A
T1 value	
<ul> <li>for proof test interval or service life according to IEC 61508</li> </ul>	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Handle
Approvals Certificates	

## **General Product Approval**









<u>KC</u>



**BIS CRS** 

Type Test Certificates/Test Report

**Special Test Certific-**



**Miscellaneous** 

Environment other Railway

Confirmation



Special Test Certific-<u>ate</u>



Siemens **EcoTech** 



**Environmental Con**firmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

all.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-1FD10

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2811-1FD10}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1FD10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1FD10/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-1FD10&objecttype=14&gridview=view1

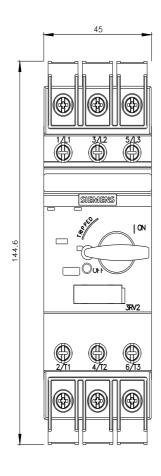

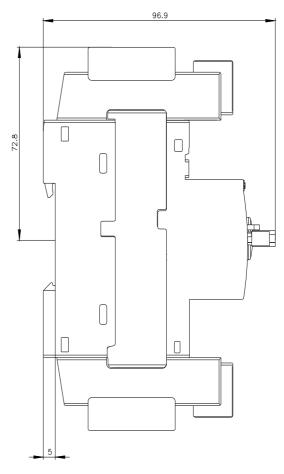

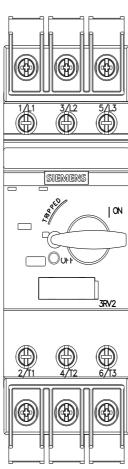

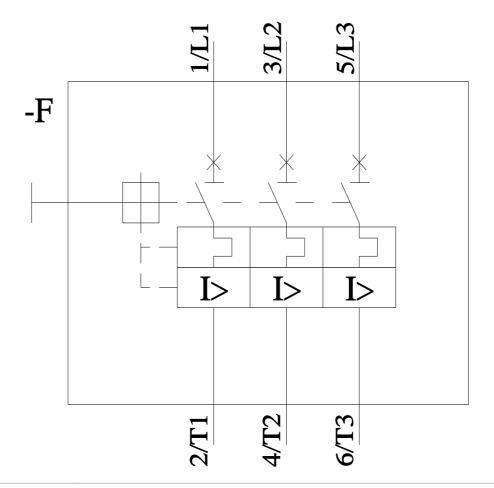

last modified: 5/1/2025 🖸