

Article No.: 6SL3220-2YC22-1UF0

Client order no. : Order no. : Offer no. : Remarks :

Rated data			
Input			
	Number of phases	3 AC	
	Line voltage	200 240 V +10 % -20 %	
	Line frequency	47 63 Hz	
	Rated voltage	200V IEC	240V NEC
	Rated current (LO)	20.80 A	20.80 A
	Rated current (HO)	16.30 A	16.30 A
Output			
	Number of phases	3 AC	
	Rated voltage	200V IEC	240V NEC 1)
	Rated power (LO)	5.50 kW	7.50 hp
	Rated power (HO)	4.00 kW	5.00 hp
	Rated current (LO)	22.00 A	22.00 A
	Rated current (HO)	17.50 A	17.50 A
	Rated current (IN)	22.80 A	
	Max. output current	29.70 A	
Pulse frequency		4 kHz	
Output frequency for vector control		0 200 Hz	
Output frequency for V/f control 0		0 550 Hz	
0	Overload capability		
Law Overland (LO)			

Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)

150% x base load current IH for 60 s within a 600 s cycle time

General tech. specifications		
Power factor λ	0.70 0.85	
Offset factor cos φ	0.96	
Efficiency η	0.96	
Sound pressure level (1m)	67 dB	
Power loss 3)	0.269 kW	
Filter class (integrated)	Unfiltered	
EMC category (with accessories)	without	
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7- 1500F)	

_		
Commi	ınica	tion

Communication PROFINET, EtherNet/IP



Item no. : Consignment no. : Project :

Inputs / outputs		
Standard digital inputs		
Number	6	
Switching level: $0 \rightarrow 1$	11 V	
Switching level: $1 \rightarrow 0$	5 V	
Max. inrush current	15 mA	
Fail-safe digital inputs		
Number	1	
Digital outputs		
Number as relay changeover contact	2	
Output (resistive load)	DC 30 V, 5.0 A	
Number as transistor	0	
Analog / digital inputs		
Number	2 (Differential input)	
Resolution	10 bit	
Switching threshold as digital input		
0 → 1	4 V	
1 → 0	1.6 V	
Analog outputs		
Number	1 (Non-isolated output)	

### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy  $\pm 5\,^{\circ}\text{C}$ 

Closed-loop control techniques		
V/f linear / square-law / parameterizable	Yes	
V/f with flux current control (FCC)	Yes	
V/f ECO linear / square-law	Yes	
Sensorless vector control	Yes	
Vector control, with sensor	No	
Encoderless torque control	No	
Torque control, with encoder	No	




Article No.: 6SL3220-2YC22-1UF0

Ambient conditions		
Standard board coating type	Class 3C2, according to IEC 60721-3-3: 2002	
Cooling	Air cooling using an integrated fan	
Cooling air requirement	0.018 m³/s (0.653 ft³/s)	
Installation altitude	1,000 m (3,280.84 ft)	
Ambient temperature		
Operation	-20 45 °C (-4 113 °F)	
Transport	-40 70 °C (-40 158 °F)	
Storage	-25 55 °C (-13 131 °F)	
Relative humidity		
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible	
Conn	ections	
Signal cable		
Conductor cross-section	0.15 1.50 mm <sup>2</sup> (AWG 24 AWG 16)	
Line side		
Version	screw-type terminal	
Conductor cross-section	1.50 16.00 mm <sup>2</sup> (AWG 16 AWG 6)	
Motor end		
Version	Screw-type terminals	
Conductor cross-section	1.50 16.00 mm <sup>2</sup> (AWG 16 AWG 6)	
DC link (for braking resistor)		
PE connection	On housing with M4 screw	
· · · · · · · · · · · · · · · · · · ·	On housing with M4 screw	
PE connection	On housing with M4 screw  150 m (492.13 ft)	

Mechanical data			
Degree of protection	IP20 / UL open type		
Frame size	FSC		
Net weight	7.1 kg (15.65 lb)		
Dimensions			
Width	140 mm (5.51 in)		
Height	295 mm (11.61 in)		
Depth	218 mm (8.58 in)		
Standards			
Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH		
CE marking	EMC Directive 2004/108/EC, Low- Voltage Directive 2006/95/EC		

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	50.4 %

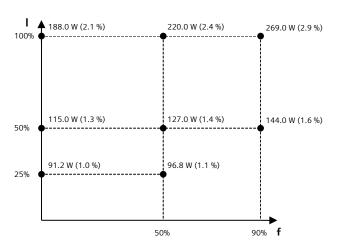

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*calculated values

 $<sup>^{1)}\</sup>mbox{The}$  output current and HP ratings are valid for the voltage range 220V-240V

<sup>&</sup>lt;sup>3)</sup> Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.



Article No.: 6SL3220-2YC22-1UF0

	Operator pane	el: Basic Operator Panel (BOP-2)	
Screen			
Display design	LCD, monochrome	Ambient temperature	
	Mechanical data		
Degree of protection	IP55 / UL type 12	Storage	
Net weight	0.140 kg (0.31 lb)	Transport	
Dimensions		Relative humidity at 25	
Width	70.00 mm (2.76 in)	Max. operation	
Height	106.85 mm (4.21 in)		
Depth	19.60 mm (0.77 in)	Certificate of suitability	

Ambient conditions		
Ambient temperature		
Operation	0 50 °C (32 122 °F)	
Storage	-40 70 °C (-40 158 °F)	
Transport	-40 70 °C (-40 158 °F)	
Relative humidity at 25°C during		
Max. operation	95 %	
Approvals		
Certificate of suitability CE, cULus, EAC, KCC, RCM		



Current

**Analog outputs** 

Output voltage

Output current

Number of analog outputs

Type of analog outputs 4)

Conductor cross-section

Article No.: 6SL3220-2YC22-1UF0

#### Inputs / outputs Digital inputs Number of digital inputs 1) 0.5 ... 1.5 mm<sup>2</sup> (AWG 21 ... AWG 16) Conductor cross-section Alternatively 2 x 0.5 mm<sup>2</sup> Input voltage $(0 \rightarrow 1)$ 11 V Input voltage (1→0) 5 V Input voltage, max. 30 V Digital outputs $^{4)}$ Switchable between voltage (0 ... 10 V) and current (0 ... 20 mA) using a parameter Number of digital outputs 4 1.5 mm<sup>2</sup> (AWG 16) Conductor cross-section Output current 2) 2 A **Analog inputs** Number of analog inputs 3) Conductor cross-section 0.5 ... 1.5 mm<sup>2</sup> (AWG 21 ... AWG 16) alternatively 2\*0.5 mm<sup>2</sup>

0 ... 20 mA

0 ... 10 V 0 ... 20 mA

Non-isolated output

Alternatively 2 x 0.5 mm<sup>2</sup>

0.5 ... 1.5 mm<sup>2</sup> (AWG 21 ... AWG 16)

2

I/O Extension Module

Mechanical data		
Dimensions		
Width	71 mm (2.80 in)	
Height	117 mm (4.61 in)	
Depth	27 mm (1.06 in)	

<sup>&</sup>lt;sup>1)</sup>DI 6: digital input; DI 7: P or M switch; DI COM: Input for Control Unit interface (24 V out, max. 250 mA)

 $<sup>^{2)}</sup> The\ max.$  current depends on the temperature and the size of the connected converted. It varies between 2 A and 3 A at 30 V DC.

 $<sup>^{3)}2</sup>$  analog inputs for the connection of Pt1000/Ni1000 temperature sensors. One of which can be optionally used as analog input.