SIEMENS

Data sheet 3LD2154-0TK51



SENTRON, Switch disconnector 3LD, main switch, 3-pole, lu: 25 A, Operating power / at AC-23 A at 400 V: 9.5 kW, front-mounted, rotary operating mechanism, black, central mounting 22.5 mm of the handle

Model	
product brand name	SENTRON
product designation	Switch disconnector
design of the product	Main switch
display version for switch position indicator manual operation	1 ON - 0 OFF
type of switch	front mounted
design of the actuating element	Short rotary knob
color of the actuating element	black
design of handle	rotary operating mechanism, black
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
size of switch disconnector	2
mechanical service life (operating cycles) typical	100 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
operating frequency maximum	50 1/h
degree of pollution	3
Voltage	
insulation voltage rated value	690 V
surge voltage resistance rated value	6 kV
operating voltage	
at AC rated value	690 V
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
Protection class	
protection class IP	IP65
degree of protection NEMA rating	1, 3R, 4X, 12
protection class IP on the front	IP65
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.1 W
Main circuit	
operational current	
• at AC-21 at 690 V rated value	25 A
• at AC-21 A at 240 V rated value	25 A
• at AC-21 A at 400 V rated value	25 A
• at AC-21 A at 440 V rated value	25 A

operating power • at AC-23 At 250 V rated value • at AC-23 At 450 V rated value • at AC-33 at 450 V rated value • at AC-3 at 250 V rated value • at 250 V rat	at AC-23 A at 400 V rated value	20 A
at A.C.23 A at 400 V rinder value 10 kW 4 A.C.23 A at 400 V rinder value 9.5 kW 4 A.C.23 A at 400 V rinder value 9.5 kW 4 A.C.23 A at 400 V rinder value 9.5 kW 4 A.C.23 A at 400 V rander value 4 kW 4 A.C.23 A at 600 V rander value 4 kW 4 A.C.23 A at 600 V rander value 8 kW 4 A.C.23 A at 600 V rander value 8 kW 4 A.C.23 A at 600 V rander value 9.5 kW 4 A.C.23 A at 600 V rander value 9.5 kW 4 A.C.23 A at 600 V rander value 9.5 kW 4 A.C.23 A at 600 V rander value 9.5 kW 4 A.C.23 A at 600 V rander value 9.5 kW 4 A.C.23 At 600 V rander value 9.5 kW 6 kW 4 A.C.23 At 600 V rander value 9.5 kW 6 kW		2071
a AL AC 23 A at 400 V rade value at AC 23 A at 400 V rade value b AL AC 34 A to 400 V rade value c AL AC 34 A to 400 V rade value b AL AC 34 A to 400 V rade value c AL AC 34 A to 400 V rade value b AL AC 34 A to 400 V rade value c		5 KW
* at AC-23 A at 440 V rated value		
at IAC-30 at 300 V rated value but AC-3 at 300 V rated value at AC-3 at 300 V rated value but AC-3 at 300 V rated value at AC-3 at 300 V rated value at AC-3 at 300 V rated value voorting value at auxiliary contacts o operating value of auxiliary contacts o o operating value of auxiliary contacts at AC maximum continuous current of the auxiliary contact at act value solv value continuous current of the auxiliary switch rated value solv value suitability for use an switch disconnector ves autiability for use an since which according to walue value at according to the auxiliary switch rated value value at according to the auxiliary contact state value suitability for use an strop switch ves autiability for use an strop switch value value to the auxiliary contact value value at value value to the auxiliary contact value value value value to the auxiliary contact value value value to the auxiliary contact value valu		
a + IAC-3 at 240 V rated value b + IAC-3 at 560 V rated value c - IAC-3 at 560 V rated value		
* at AC3 at 480 V rated value 7.5 kW Auditiny circuit number of CO contacts for auxiliary contacts 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		
- ACC 3 tt 690 V roled value - Number of CO contacts for auxiliary contacts - number of CO contacts for auxiliary contacts - O - number of NC contacts for auxiliary contacts - O - Operating voltage of auxiliary contacts at C maximum - S00 V - Continuous current of the auxiliary contact at AC maximum - S00 V - Continuous current of the auxiliary contact at S00 V - South Insulation voltage of the auxiliary switch relevable - S00 V - South Insulation voltage of the auxiliary switch relevable - S00 V - South Insulation voltage of the auxiliary switch relevable - S00 V - South Insulation voltage of the auxiliary switch relevable - S00 V - South Insulation voltage of the auxiliary switch relevable - S00 V - South Insulation voltage of the auxiliary switch - Ves - suitability for use main switch - Ves - suitability for use maintenance/repair switch - Ves - suitability for use maintenance/repair switch - Ves - voltage trigger - S00 V y -		
Austilary circuit number of ICO contacts for auxiliary contacts 0 number of NC contacts for auxiliary contacts 0 number of NC contacts for auxiliary contacts 0 porating voltage of auxiliary contacts at AC maximum continuous current of the auxiliary contact rated value 10 A misulation voltage of the auxiliary contact rated value 10 A misulation voltage of the auxiliary contact rated value 10 A misulation voltage of the auxiliary contact rated value 10 A misulation voltage of the auxiliary contact rated value 10 A misulation voltage of the auxiliary contact rated value 10 A misulation voltage of the auxiliary contact value 10 A misulation voltage of the auxiliary contact value 10 A misulation voltage of the auxiliary contact value 10 A misulation voltage of the auxiliary contact value 10 A misulation voltage of the auxiliary contact value 10 A misulation voltage of value 10 A misulation voltage of value 10 A misulation voltage of the auxiliary contact value 10 A misulation voltage of value 11 A misulation voltage of value 12 A misulation volt		
number of NC contacts for auxiliary contacts on unmber of NC contacts for auxiliary contacts on unmber of NC contacts for auxiliary contacts and to make a continuous current of the auxiliary contact and AC maximum 500 V continuous current of the auxiliary contact and V continuous current of the Contin		7.5 KW
number of NC contacts for auxillary contacts 0 poperating voltage of auxillary contacts at AC machinum 500 V continuous current of the auxillary contact rated value insulation voltage of the auxillary contact rated value 500 V Sitra-fility suitability for use main switch suitability for use switch disconnector vas suitability for use main switch vas suitability for use maintenance/repair switch vas suitability for use maintenance/repair switch vas product feature and be locked into OFF position Ves Accessories Product detains product connectable NC contacts for auxillary contacts attachable maximum number of connectable NC contacts for auxillary contacts attachable maximum number of breakte locks maximum 3 hasp thickness of the bracket locks 48 mm Short circuit conditional short-circuit current with line-side fuse protection at 800 V by gG fuse rated value 2 Is 800 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse maximum at 840 V for combination switch + gG fuse max		0
number of NO contacts for auxiliary contacts at A cmaximum Continuous current of the auxiliary contact rated value Insulation voltage of the auxiliary switch rated value Soo V Statishity Surbability for use main switch Surbability for use main switch Surbability for use switch disconnector Surbability for use switch disconnector Surbability for use switch disconnector Surbability for use safety switch Subtability for use safety switch subtablit		
operating voltage of auxiliary contacts at AC maximum Continuous current of the auxiliary contact rated value Signary Solitability Suitability for use main switch Suitability for use switch disconnector Suitability for use safety switch Suitability for use switch switch Suitability for use safety switch Suitability for use safety switch Suitability for use switch switch switch Suitability for use switch switch switch switch Suitability for use switch switch switch Suitability for use switch switch switch Suitability for use switch switch switch switch Suitability for use switch switch switch switch Suitability for use switch switch switch Suitability for use switch switch Suitability for use switch switch switch Suitability for use switch switch Suitability for use switch switch S		
continuous current of the auxiliary contact rated value insulation voltage of the auxiliary switch rated value SD0 V suitability for use main switch Suitability for use switch disconnector Yes Suitability for use switch disconnector Yes Suitability for use switch disconnector Suitability for use safety switch Ves Suitability for use maintenance/repair switch Ves Product details Product feature can be locked into OFF position Accessories Product extension optional Sundor of connectable NC contacts for auxiliary contacts Suitability for use safety switch Ves Suitability for use safety switch No		
Insulation voltage of the auxiliary switch rated value Suitability for use main switch Suitability for use switch disconnector Ves Suitability for use switch disconnector Ves Suitability for use safety switch Yes Accessories Product deature No No No No No No No No No N		
Suitability for use switch disconnector Yes suitability for use SMERGENCY OFF switch No suitability for use SMERGENCY OFF switch Yes suitability for use SMERGENCY OFF switch Yes suitability for use SMERGENCY OFF switch Yes suitability for use maintenance/repair switch Yes suitability for use maintenance/repair switch Yes Product detains Product detains Product detains Product detains Product detains Product oxtension optional • motor drive • voltage trigger No number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of bracket locks number of br	-	
suitability for use switch disconnoctor Yes suitability for use SWERCENCY OFF switch No suitability for use SEMERCENCY OFF switch Yes suitability for use safety switch Yes Product details product feature can be locked into OFF position Yes Accessorias Product extension optional • motor drive No • voltage trigger No number of connectable NC contacts for auxiliary contacts statchable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of the tracket locks in auxiliary contacts attachable maximum number of the tracket locks maximum 3 hasp thickness of the bracket locks A 8 mm Short circuit Conditional short-circuit current with line-side fuse protection • at 600 V by Gr fuse rated value • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse maximum • at 600 V for combination switch + gG fuse fuse guide. • at 600 V for combination switch + gG fuse fuse guide. • at 600 V for combination switch + gG fus	,	500 V
suitability for use SMERGENCY OFF switch Suitability for use Safety switch Ves suitability for use safety switch Ves suitability for use safety switch Yes Product feature can be locked into OFF position Accessories product extension optional • motor drive • voltage trigger No number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of bracket locks number of bracket locks number of bracket locks number of bracket locks		V
suitability for use Safety switch ves suitability for use safety switch ves suitability for use maintenance/repair switch ves Product details product details product details product extension optional • motor drive • voltage trigger number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of bracket locks maximum number of bracket locks maximum number of bracket locks maximum attachable maximum number of bracket locks maximum at 800 V by gS fuse rated value let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 690 V by Groundination switch + gG fuse maximum • at 440 V for combination switch + gG fuse fuse fuse fuse fuse fuse fuse gLugo: 25 A good fuse fuse fuse gLugo: 25 A good fuse fuse gLugo: 25 A good fuse fuse gLugo: 25 A good fu	·	
suitability for use safety switch Yes Troduct details product teature can be locked into OFF position Accessories Product extension optional motor drive No voltage trigger number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable CC contacts for auxiliary contacts attachable maximum number of bracket locks maximum at 880 V by gG fuse rated value let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 480 V for combination	•	
suitability for use maintenance/repair switch Product feature can be locked into OFF position Accessories product extension optional motor drive voltage trigger No number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of pracket locks maximum 3 nasp thickness of the bracket locks 848 mm Short circuit conditional short-circuit current with line-side fuse protection at 800 V by GG fuse rated value 50 kA let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum 4 kA2.s 4 design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the maximum at 440 V for combination switch + gG fuse maximum 4 kA2.s 4 design of the fuse link for short-circuit protection of the main circuit required for short-circuit protection of the maximum at a fuse gLyG: 25 A fuse gLyG: 25 A fuse gLyG: 25 A fuse gLyG: 25 A fuse gLyG: 10 A operational current of upstream fuse rated value 25 A coording UL operational current at AC according to UL 508/UL 60947-4-1 rated value active power (hp) at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power (hp) at AC at 480 V according to UL 508/UL 60947-4-1 rated value		
Product feature can be locked into OFF position Yes Accessories product extension optional • motor drive No • voltage trigger No number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of bronnectable CO contacts for auxiliary contacts attachable maximum a number of bracket locks maximum 3 hasp thickness of the bracket locks maximum 4 hasp thickness of the bracket locks maximum • at 680 V by gG fuse rated value • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V fo		1.55
product feature can be locked into OFF position Accessories product extension optional	· ·	168
product extension optional motor drive voltage trigger number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum number of bracket locks maximum a hasp thickness of the bracket locks savinum a hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection at 690 V by GG fuse rated value 1et-through current with closed switch at 440 V for combination switch + gG fuse maximum at 480 V for combination switch + gG fuse maximum at 480 V for combination switch + gG fuse maximum at 480 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum bernissible at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum bernissible at 690 V for combination switch + gG fuse maximum bernissible at 690 V for combination switch + gG fuse maximum bernissible at 690 V for combination switch + gG fuse maximum bernissible bernissib		Voc
product extension optional	· ·	100
woltage trigger No number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum namber of bracket locks maximum namber of bracket locks saximum sate of 600 Vb gG fuse rated value solve from ship of suse rated value solve from ship of suse maximum at 600 V for combination switch + gG fuse maximum at 600 V for combination switch + gG fuse maximum be 600 V for combination switch + gG fuse fuse fuse fuse fuse fuse fuse fuse		
• voltage trigger number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts of attachable maximum number of tracket locks maximum 3 hasp thickness of the bracket locks 4 8 mm Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value 10 the through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fu	·	No
number of connectable NC contacts for auxiliary contacts attachable maximum number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks 4 8 mm Short circuit conditional short-circuit current with line-side fuse protection at 690 V by gG fuse rated value 50 kA let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch at 440 V for com		
number of connectable NO contacts for auxiliary contacts attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum number of bracket locks maximum namber of bracket locks 48 mm Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by g fuse rated value 1et-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combina		
attachable maximum number of connectable CO contacts for auxiliary contacts attachable maximum 3 has pthickness of the bracket locks Maximum 4 8 mm Short circuit conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value [let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 490 V for combination switch + gG fuse maximum • at 490 V for combination switch + gG fuse maximum • at 490 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combina	attachable maximum	
attachable maximum number of bracket locks maximum 1	attachable maximum	
hasp thickness of the bracket locks Short circuit conditional short-circuit current with line-side fuse protection at 690 V by gG fuse rated value at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum for short-circuit protection of the main circuit required for short-circuit protection of the auxiliary switch required for short-circuit protection of the auxiliary switch required perational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	attachable maximum	
Conditional short-circuit current with line-side fuse protection at 690 V by gG fuse rated value 50 kA let-through current with closed switch at 240 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum be at 690 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum be for short-circuit protection of the main circuit required fuse gL/gG: 25 A for short-circuit protection of the auxiliary switch required porational current of upstream fuse rated value 25 A according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value		
conditional short-circuit current with line-side fuse protection • at 690 V by gG fuse rated value 10t-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum • for short-circuit protection of the main circuit required • for short-circuit protection of the main circuit required • for short-circuit protection of the maxillary switch required operational current of upstream fuse rated value 25 A according UL operational current at AC according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	·	4 8 mm
protection		
let-through current with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • at 240 V for combination switch + gG fuse maximum permissible Izt value with closed switch • at 240 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 440 V for combination switch + gG fuse maximum • at 690 V for combination switch + gG fuse maximum • for short-circuit protection of the main circuit required • for short-circuit protection of the auxiliary switch required • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value 25 A according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value		
at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum permissible 12t value with closed switch at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 442 s design of the fuse link after 6 for short-circuit protection of the main circuit required fuse gL/gG: 25 A for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	at 690 V by gG fuse rated value	50 kA
at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum permissible 12t value with closed switch at 240 V for combination switch + gG fuse maximum at 4 kA2.s at 690 V for combination switch + gG fuse maximum at 4 kA2.s at 690 V for combination switch + gG fuse maximum at 4 kA2.s design of the fuse link at 600 V for combination of the main circuit required for short-circuit protection of the auxiliary switch required for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	let-through current with closed switch	
at 690 V for combination switch + gG fuse maximum permissible 12t value with closed switch at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse gL/gG: 25 A fuse gL/gG: 25 A fuse gL/gG: 25 A according UL operational current at AC according to UL 508/UL 60947-4-1 according UL operational current at AC according to UL 508/UL 60947-4-1 according UL operational curr	 at 240 V for combination switch + gG fuse maximum 	3.5 kA
permissible I2t value with closed switch	 at 440 V for combination switch + gG fuse maximum 	3.5 kA
at 240 V for combination switch + gG fuse maximum at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum before short-circuit protection of the main circuit required fuse gL/gG: 25 A befor short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	•	4 kA
at 440 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum at 690 V for combination switch + gG fuse maximum 4 kA2.s design of the fuse link at 690 V for short-circuit protection of the main circuit required af fuse gL/gG: 25 A fuse gL/gG: 10 A operational current of upstream fuse rated value 25 A according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	I2t value with closed switch	
at 690 V for combination switch + gG fuse maximum design of the fuse link for short-circuit protection of the main circuit required fuse gL/gG: 25 A for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	 at 240 V for combination switch + gG fuse maximum 	4 kA2.s
design of the fuse link • for short-circuit protection of the main circuit required • for short-circuit protection of the auxiliary switch required fuse gL/gG: 25 A • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value 25 A according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	 at 440 V for combination switch + gG fuse maximum 	4 kA2.s
• for short-circuit protection of the main circuit required • for short-circuit protection of the auxiliary switch required • for short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	• at 690 V for combination switch + gG fuse maximum	4 kA2.s
of r short-circuit protection of the auxiliary switch required operational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	design of the fuse link	
operational current of upstream fuse rated value according UL operational current at AC according to UL 508/UL 60947-4-1 25 A rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 15		
operational current at AC according to UL 508/UL 60947-4-1 25 A rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15		
operational current at AC according to UL 508/UL 60947-4-1 rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	<u> </u>	25 A
rated value operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15		
active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15		25 A
active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value 15	60947-4-1 rated value	600 V
60947-4-1 rated value		10
short-time withstand current (SCCR) at 600 V according to 5 kA	60947-4-1 rated value	15
	short-time withstand current (SCCR) at 600 V according to	5 kA

UL 508/UL 60947-4-1	
continuous current of upstream fuse according to UL rated value	50 A
type of fuse according to UL	RK5
Connections	
AWG number as coded connectable conductor cross section solid maximum	
•	8
•	14
type of connectable conductor cross-sections for copper conductor	
• solid	1x (1,516mm²)
 finely stranded with core end processing 	1x (1,510mm²)
• stranded	1x (1,516mm²)
type of connectable conductor cross-sections for auxiliary contacts	
• solid	2x (0.75 2.5 mm²), 1x 4 mm²
 finely stranded with core end processing 	2x (0.75 1.5 mm²), 1x 2.5 mm²
stranded	2x (0.75 2.5 mm²), 1x 4 mm²
type of electrical connection	
for main current circuit	box terminal
for auxiliary contacts	connection terminals
Mechanical Design	
height	84 mm
width	67 mm
depth	116.5 mm
type of device	fixed mounting
fastening method	Built-in unit fixed-mounted version
fastening method	
 4-hole front mounting 	No
 front mounting with central attachment 	Yes
rail mounting	No
Net Weight	207 g
Environmental conditions	
ambient temperature during operation	
• minimum	-25 °C
maximum	55 °C
ambient temperature during storage	
• minimum	-25 °C
maximum	55 °C
Approvals Certificates	

General Product Approval











Miscellaneous

General Product Approval

Maritime application

other











Confirmation

Environment

Environmental Confirmations Environmental Confirmations

Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD2154-0TK51

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3LD2154-0TK51

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD2154-0TK51


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications


http://www.siemens.com/specifications










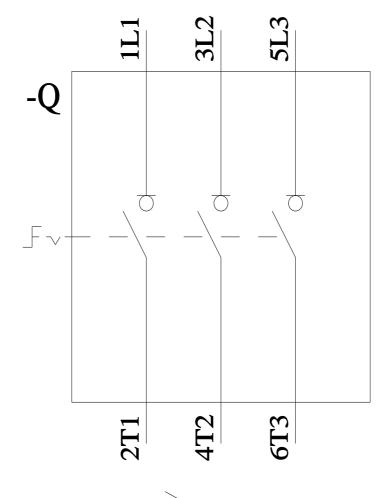

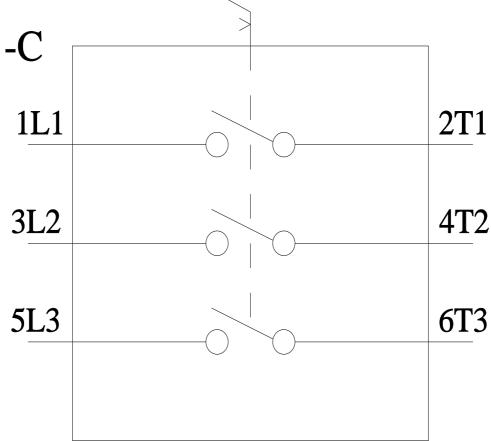

last modified: 5/24/2025 🖸