## **SIEMENS**

Data sheet 3RH2122-1BB40



contactor relay, 2 NO + 2 NC, 24 V DC, screw terminal, frame size S00

| product brand name  | SIRIUS                 |
|---|------------------------|
| product designation   | Auxiliary contactor    |
| product type designation  | 3RH2                   |
| General technical data  |                        |
| size of contactor   | S00                    |
| product extension auxiliary switch  | Yes                    |
| power loss [W] for rated value of the current without load current share typical                            | 4 W                    |
| insulation voltage with degree of pollution 3 at AC rated value   | 690 V                  |
| degree of pollution   | 3                      |
| surge voltage resistance rated value  | 6 kV                   |
| shock resistance at rectangular impulse   |                        |
| • at DC   | 10g / 5 ms, 5g / 10 ms |
| shock resistance with sine pulse  |                        |
| • at DC   | 15g / 5 ms, 8g / 10 ms |
| mechanical service life (operating cycles)  |                        |
| <ul> <li>of contactor typical</li> </ul>  | 30 000 000             |
| <ul> <li>of the contactor with added electronically optimized<br/>auxiliary switch block typical</li> </ul> | 5 000 000              |
| <ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>                              | 10 000 000             |
| reference code according to IEC 81346-2   | K                      |
| Substance Prohibitance (Date)   | 10/01/2009             |
| Weight  | 270.5 g                |
| Ambient conditions  |                        |
| installation altitude at height above sea level maximum   | 2 000 m                |
| ambient temperature   |                        |
| during operation  | -25 +60 °C             |
| during storage  | -55 +80 °C             |
| relative humidity minimum   | 10 %                   |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum  | 95 %                   |
| Environmental footprint   |                        |
| Environmental Product Declaration(EPD)  | Yes                    |
| global warming potential [CO2 eq] total   | 133 kg                 |
| global warming potential [CO2 eq] during manufacturing  | 1.3 kg                 |
| global warming potential [CO2 eq] during operation  | 132 kg                 |
| global warming potential [CO2 eq] after end of life   | -0.227 kg              |
| Main circuit  |                        |
| no-load switching frequency   |                        |
| • at AC   | 10 000 1/h             |
| • at DC   | 10 000 1/h             |

| type of voltage of the control supply voltage control supply voltage at DC rated value 24 V  operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • full-scale value  closing power of magnet coil at DC  holding power of magnet coil at DC  closing delay  • at DC  opening delay  • at DC  opening delay  • at DC  range factor control supply voltage rated value of magnet coil at DC  toloing power of magnet coil at DC  4 W  closing power of magnet coil at DC  4 W  closing delay  • at DC  opening delay  • at DC  opening delay  • at DC  range factor contacts for auxiliary contacts  • instantaneous contact  10 15 ms  Auxiliary circuit  number of NC contacts for auxiliary contacts  • instantaneous contact  2 instantaneous contact  2 instantaneous contact  2 identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  • at 24 V rated value  • at 24 V rated value  • at 250 V rated value   |  |
|--|--|
| control supply voltage at DC rated value  operating range factor control supply voltage rated value of magnet coil at DC  initial value  of ull-scale value  closing power of magnet coil at DC  holding power of magnet coil at DC  closing delay  ot DC  opening delay  ot DC  opening delay  ot DC  range to Contacts for auxiliary contacts  instantaneous contact  number of NC contacts for auxiliary contacts  oinstantaneous contact  lidentification number and letter for switching elements  operational current at AC-15  ot at 230 V rated value  ot at 690 V rated value  ot at 24 V rated value  ot at 24 V rated value  ot at 220 V rated value  ot at 220 V rated value  ot at 240 V rated value  ot at 220 V rated value  ot at 240 V rated value  ot 3A  ot 3 |  |
| operating range factor control supply voltage rated value of magnet coil at DC  • initial value  • full-scale value  closing power of magnet coil at DC  holding power of magnet coil at DC  value  • at DC  opening delay  • at DC  arcing time  10 15 ms  Auxiliary circuit  number of NC contacts for auxiliary contacts  • instantaneous contact  number of NO contacts for auxiliary contacts  • instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 690 V rated value  • at 220 V rated value  • at 24 V rated value  • at 21 V rated value  • at 220 V rated value  • at 220 V rated value  • at 24 V rated value  • at 220 V rated value  • at 220 V rated value  • at 240 V rated value  • at 440 V rated value  • at 690 V rated value  • at 690 V rated value  • at 600 V rated value  |  |
| e full-scale value  closing power of magnet coil at DC  holding power of magnet coil at DC  closing delay  e at DC  opening delay  e at DC  opening delay  10 13 ms  arcing time  number of NC contacts for auxiliary contacts  instantaneous contact  instantaneous contact  instantaneous contact  operational current at AC-12 maximum  operational current at AC-15  e at 230 V rated value  e at 690 V rated value  at 400 V rated value  at 24 V rated value  e at 220 V rated value  e at 220 V rated value  e at 220 V rated value  e at 440 V rated value  e 440 V rated       |  |
| closing power of magnet coil at DC holding power of magnet coil at DC  closing delay   |  |
| holding power of magnet coil at DC  closing delay  |  |
| closing delay  |  |
| at DC opening delay at DC roughling delay at DC roughling delay at DC roughling delay roughli  |  |
| opening delay  • at DC  arcing time  Auxiliary circuit  number of NC contacts for auxiliary contacts  • instantaneous contact  12  number of NO contacts for auxiliary contacts  • instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 690 V rated value  • at 690 V rated value  • at 220 V rated value  • at 440 V rated value  • at 6600 V rated value   |  |
| arcing time  10 15 ms  Auxiliary circuit  number of NC contacts for auxiliary contacts  instantaneous contact  instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  at 230 V rated value  at 400 V rated value  at 690 V rated value  at 690 V rated value  at 24 V rated value  at 220 V rated value  at 24 V rated value  at 24 V rated value  at 220 V rated value  at 220 V rated value  at 240 V rated value  at       |  |
| arcing time  Auxiliary circuit  number of NC contacts for auxiliary contacts  • instantaneous contact  number of NO contacts for auxiliary contacts  • instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 690 V rated value  • at 690 V rated value  • at 110 V rated value  • at 220 V rated value  • at 220 V rated value  • at 440 V rated value  • at 690 V rated value  • at 690 V rated value  • at 110 V rated value  • at 110 V rated value  • at 220 V rated value  • at 440 V rated value  • at 440 V rated value  • at 690 V rated value  |  |
| Auxiliary circuit  number of NC contacts for auxiliary contacts  instantaneous contact  instantaneous contact  instantaneous contact  instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  at 230 V rated value  at 400 V rated value  at 690 V rated value  at 690 V rated value  at 690 V rated value  at 10 A  operational current at 1 current path at DC-12  at 24 V rated value  at 110 V rated value  at 120 V rated value  at 24 V rated value  at 25 O V rated value  at 26 O V rated value  at 27 O V rated value  at 28 O V rated value  at 29 O V rated value  at 440 V rated value  at 600 V rated value   |  |
| number of NC contacts for auxiliary contacts  instantaneous contact  instantaneous contact  instantaneous contact  instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  at 230 V rated value  at 400 V rated value  at 500 V rated value  at 690 V rated value  at 690 V rated value  at 10 A  operational current at 1 current path at DC-12  at 24 V rated value  at 110 V rated value  at 220 V rated value  at 240 V ra |  |
| <ul> <li>instantaneous contact</li> <li>number of NO contacts for auxiliary contacts</li> <li>instantaneous contact</li> <li>identification number and letter for switching elements</li> <li>operational current at AC-12 maximum</li> <li>operational current at AC-15</li> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 210 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 210 V rated value</li> <li>at 210 V rated value</li> <li>at 210 V rated value</li> <li>at 24 V rated value</li> <li>at 250 V rated value</li> <li>at 260 V rated value</li> <li>at 270 V rated value</li> <li>at 280 V rated value</li> <li>at 3 A</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul>  |  |
| number of NO contacts for auxiliary contacts  • instantaneous contact  identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  • at 24 V rated value  • at 110 V rated value  • at 220 V rated value  • at 220 V rated value  • at 440 V rated value  • at 440 V rated value  • at 440 V rated value  • at 460 V rated value  • at 600 V rated value  |  |
| <ul> <li>instantaneous contact</li> <li>identification number and letter for switching elements</li> <li>operational current at AC-12 maximum</li> <li>operational current at AC-15</li> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 240 V rated value</li> <li>at 250 V rated value</li> <li>at 260 V rated value</li> <li>at 600 V rated value</li> </ul>   |  |
| identification number and letter for switching elements  operational current at AC-12 maximum  operational current at AC-15  • at 230 V rated value  • at 400 V rated value  • at 500 V rated value  • at 690 V rated value  • at 690 V rated value  • at 24 V rated value  • at 24 V rated value  • at 210 V rated value  • at 24 V rated value  • at 24 V rated value  • at 440 V rated value  • at 440 V rated value  • at 440 V rated value  • at 600 V rated value  |  |
| operational current at AC-12 maximum         10 A           operational current at AC-15         10 A           • at 230 V rated value         3 A           • at 400 V rated value         2 A           • at 690 V rated value         1 A           operational current at 1 current path at DC-12         10 A           • at 24 V rated value         3 A           • at 110 V rated value         3 A           • at 220 V rated value         1 A           • at 440 V rated value         0.3 A           • at 600 V rated value         0.15 A  |  |
| operational current at AC-15   |  |
| <ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> </ul>   |  |
| <ul> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>1 A</li> <li>operational current at 1 current path at DC-12</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>0.15 A</li> </ul>   |  |
| <ul> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>1 A</li> <li>operational current at 1 current path at DC-12</li> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> </ul>   |  |
| operational current at 1 current path at DC-12         • at 24 V rated value       10 A         • at 110 V rated value       3 A         • at 220 V rated value       1 A         • at 440 V rated value       0.3 A         • at 600 V rated value       0.15 A   |  |
| <ul> <li>at 24 V rated value</li> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>0.15 A</li> </ul>  |  |
| <ul> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>0.15 A</li> </ul>   |  |
| <ul> <li>at 220 V rated value</li> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>0.15 A</li> </ul>   |  |
| <ul> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>0.3 A</li> <li>0.15 A</li> </ul>  |  |
| at 600 V rated value     0.15 A  |  |
|  |  |
|  |  |
| operational current with 2 current paths in series at DC-12  |  |
| • at 24 V rated value 10 A   |  |
| • at 60 V rated value 10 A   |  |
| at 110 V rated value     4 A  A A  A A  A A  A A  A A  A A   |  |
| at 220 V rated value     2 A      at 440 V rated value   |  |
| <ul> <li>at 440 V rated value</li> <li>at 600 V rated value</li> <li>0.65 A</li> </ul>   |  |
| operational current with 3 current paths in series at DC-12  |  |
| • at 24 V rated value  10 A  |  |
| • at 60 V rated value 10 A   |  |
| • at 110 V rated value 10 A  |  |
| • at 220 V rated value 3.6 A   |  |
| • at 440 V rated value 2.5 A   |  |
| at 600 V rated value     1.8 A   |  |
| operating frequency at DC-12 maximum 1 000 1/h   |  |
| operational current at 1 current path at DC-13   |  |
| • at 24 V rated value 10 A   |  |
| • at 110 V rated value 1 A   |  |
| • at 220 V rated value 0.3 A   |  |
| • at 440 V rated value 0.14 A  |  |
| at 600 V rated value     0.1 A   |  |
| operational current with 2 current paths in series at DC-13  |  |
| at 24 V rated value     10 A  2 5 A  |  |
| at 60 V rated value     3.5 A      at 110 V rated value  |  |
| <ul> <li>at 110 V rated value</li> <li>at 220 V rated value</li> <li>0.9 A</li> </ul>  |  |
| • at 440 V rated value 0.9 A   |  |
| • at 600 V rated value 0.1 A   |  |
| operational current with 3 current paths in series at DC-13  |  |

| at 24 V rated value   | 10 A   |
|---|--|
| <ul><li>at 60 V rated value</li></ul>   | 4.7 A  |
| <ul> <li>at 110 V rated value</li> </ul>  | 3 A  |
| <ul> <li>at 220 V rated value</li> </ul>  | 1.2 A  |
| <ul> <li>at 440 V rated value</li> </ul>  | 0.5 A  |
| <ul> <li>at 600 V rated value</li> </ul>  | 0.26 A   |
| operating frequency at DC-13 maximum  | 1 000 1/h  |
| contact reliability of auxiliary contacts   | 1 faulty switching per 100 million (17 V, 1 mA)  |
| UL/CSA ratings  |  |
| contact rating of auxiliary contacts according to UL  | A600 / Q600  |
| Short-circuit protection  |  |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V | C characteristic: 10 A; 0.4 kA   |
| design of the fuse link for short-circuit protection of the auxiliary switch required                     | gG: 10 A (690 V, 1 kA)   |
| Installation/ mounting/ dimensions  |  |
| mounting position   | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method  | screw and snap-on mounting onto 35 mm DIN rail   |
| height  | 57.5 mm  |
| width   | 45 mm  |
| depth   | 73 mm  |
| required spacing  |  |
| with side-by-side mounting  |  |
| — forwards  | 10 mm  |
| — upwards   | 10 mm  |
| — downwards   | 10 mm  |
| — at the side   | 0 mm   |
| • for grounded parts  |  |
| — forwards  | 10 mm  |
| — upwards   | 10 mm  |
| — upwards<br>— at the side  | 6 mm   |
|   | * · · · · ·  |
| — downwards   | 10 mm  |
| • for live parts  | 10   |
| — forwards  | 10 mm  |
| — upwards   | 10 mm  |
| — downwards   | 10 mm  |
| — at the side   | 6 mm   |
| Connections/ Terminals  |  |
| type of electrical connection for auxiliary and control circuit   | screw-type terminals   |
| type of connectable conductor cross-sections  |  |
| • for auxiliary contacts  |  |
| — solid or stranded   | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²  |
| <ul> <li>finely stranded with core end processing</li> </ul>  | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)  |
| for AWG cables for auxiliary contacts   | 2x (20 16), 2x (18 14), 2x 12  |
| Safety related data   |  |
| product function  |  |
| <ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>                                | Yes  |
| suitable for safety function  | Yes  |
| suitability for use safety-related switching OFF  | Yes  |
| service life maximum  | 20 a   |
| proportion of dangerous failures  |  |
| with low demand rate according to SN 31920  | 40 %   |
| with high demand rate according to SN 31920   | 73 %   |
| B10 value with high demand rate according to SN 31920   | 1 000 000; With 0.3 x le   |
| failure rate [FIT] with low demand rate according to SN 31920   | 100 FIT  |
| ISO 13849   |  |
| device type according to ISO 13849-1  | 3  |
| overdimensioning according to ISO 13849-2 necessary   | Yes  |
| IEC 61508   |  |
| safety device type according to IEC 61508-2   | Type A   |
|   |  |

**Electrical Safety** 

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front

IP20

Approvals Certificates

**General Product Approval** 









<u>KC</u>



**EMV** 

**Functional Saftey** 

**Test Certificates** 

Maritime application



Type Examination Certificate

Special Test Certificate

Type Test Certificates/Test Report

**Miscellaneous** 



Maritime application













other

Railway **Dangerous goods** 



Confirmation

**Miscellaneous** 

Special Test Certific-<u>ate</u>

**Transport Information** 



**Environment** 

**Environment** 

**Environmental Confirmations** 

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RH2122-1BB40

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH2122-1BB40

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-1BB4


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RH2122-1BB40&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RH2122-1BB40/char


Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2122-1BB40&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RH2122-1BB40&objecttype=14&gridview=view1</a>







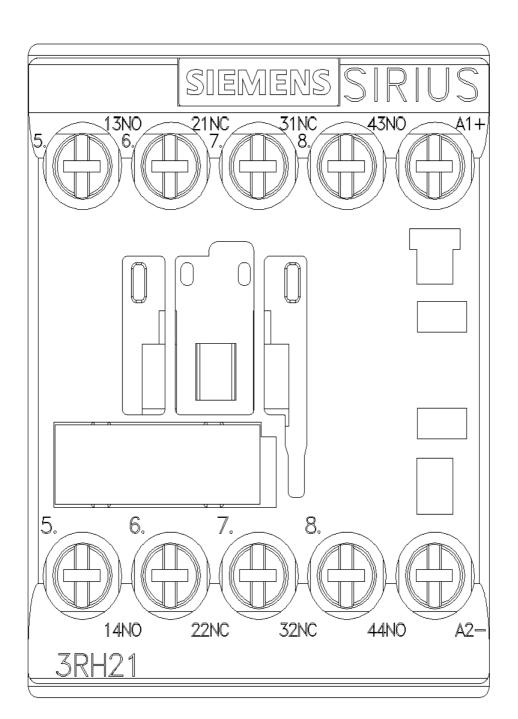

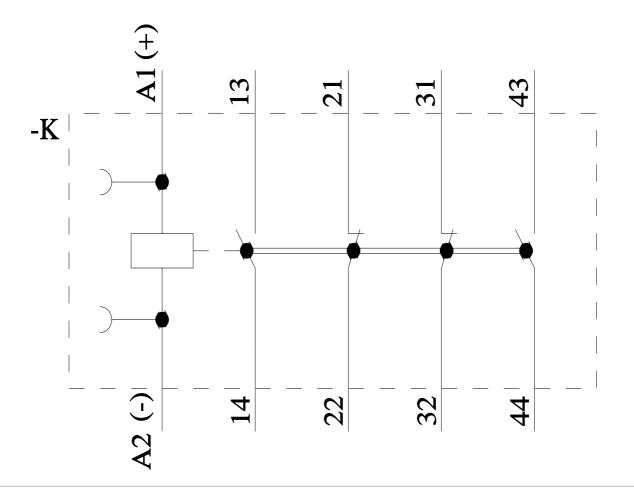

last modified: 9/5/2025 🖸