## **SIEMENS**

Data sheet 3RT2046-1AL26



power contactor, AC-3e/AC-3, 95 A, 45 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 2 NO + 2 NC, screw terminal, size: S3, lateral auxiliary switch

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S3
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	19.8 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	6.6 W
without load current share typical	25 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	1 000 V
<ul> <li>of auxiliary circuit with degree of pollution 3 rated value</li> </ul>	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	10.3g / 5 ms, 6,.g / 10 ms
shock resistance with sine pulse	
• at AC	16.3g / 5 ms, 10.g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
Weight	1.715 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %


Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	405 kg
global warming potential [CO2 eq] during manufacturing	7.66 kg
global warming potential [CO2 eq] during mandiactumg	399 kg
global warming potential [CO2 eq] after end of life	-1.19 kg
Main circuit	i. to hg
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	•
at AC-3 rated value maximum	1 000 V
at AC-3e rated value maximum	1 000 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated value</li> <li>at AC-1</li> </ul>	130 A
— up to 690 V at ambient temperature 40 °C rated value	130 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	110 A
• at AC-3	
— at 400 V rated value	95 A
— at 500 V rated value	95 A
— at 690 V rated value	78 A
— at 1000 V rated value	30 A
• at AC-3e	
— at 400 V rated value	95 A
— at 500 V rated value	95 A
— at 690 V rated value	78 A
— at 1000 V rated value	30 A
at AC-4 at 400 V rated value	80 A
• at AC-5a up to 690 V rated value	114 A
<ul><li>at AC-5b up to 400 V rated value</li><li>at AC-6a</li></ul>	95 A
— up to 230 V for current peak value n=20 rated value	84.4 A
— up to 400 V for current peak value n=20 rated value	84.4 A
up to 500 V for current peak value n=20 rated value	84.4 A
— up to 690 V for current peak value n=20 rated value	58 A
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	56.3 A
— up to 400 V for current peak value n=30 rated value	56.3 A
— up to 500 V for current peak value n=30 rated value	56.3 A
— up to 690 V for current peak value n=30 rated value	56.3 A
minimum cross-section in main circuit at maximum AC-1 rated value	50 mm <sup>2</sup>
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	42 A
at 690 V rated value	30 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	60 A
— at 110 V rated value	9 A
— at 220 V rated value	2 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.4 A
with 2 current paths in series at DC-1	400.4
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	10 A

— at 440 V rated value	1.8 A
— at 600 V rated value	1.0 A
with 3 current paths in series at DC-1	
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	80 A
— at 440 V rated value	4.5 A
— at 600 V rated value	2.6 A
• at 1 current path at DC-3 at DC-5	2.0 A
— at 24 V rated value	40 A
— at 60 V rated value	6 A
— at 110 V rated value	2.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.15 A
— at 600 V rated value	0.06 A
with 2 current paths in series at DC-3 at DC-5	0.00 A
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	7 A
— at 440 V rated value	0.42 A
— at 600 V rated value	0.16 A
with 3 current paths in series at DC-3 at DC-5	0.1071
— at 24 V rated value	100 A
— at 60 V rated value	100 A
— at 110 V rated value	100 A
— at 220 V rated value	35 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.35 A
operating power	0.0071
at AC-2 at 400 V rated value	45 kW
• at AC-3	· · · · · · · · · · · · · · · · · · ·
— at 230 V rated value	22 kW
— at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	75 kW
— at 1000 V rated value	37 kW
• at AC-3e	
— at 230 V rated value	22 kW
— at 400 V rated value	45 kW
— at 500 V rated value	55 kW
— at 690 V rated value	75 kW
— at 1000 V rated value	37 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	22 kW
at 690 V rated value	27.4 kW
operating apparent power at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	33 kVA
<ul> <li>up to 230 V for current peak value n=20 rated value</li> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	33 kVA 58 kVA
· · · · · · · · · · · · · · · · · · ·	
• up to 400 V for current peak value n=20 rated value	58 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	58 kVA 73 kVA
<ul> <li>up to 400 V for current peak value n=20 rated value</li> <li>up to 500 V for current peak value n=20 rated value</li> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	58 kVA 73 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value operating apparent power at AC-6a	58 kVA 73 kVA 69 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value	58 kVA 73 kVA 69 kVA 22.4 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value	58 kVA 73 kVA 69 kVA 22.4 kVA 39 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a  up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state up to	58 kVA 73 kVA 69 kVA 22.4 kVA 39 kVA 48.7 kVA
up to 400 V for current peak value n=20 rated value up to 500 V for current peak value n=20 rated value up to 690 V for current peak value n=20 rated value  operating apparent power at AC-6a up to 230 V for current peak value n=30 rated value up to 400 V for current peak value n=30 rated value up to 500 V for current peak value n=30 rated value up to 690 V for current peak value n=30 rated value	58 kVA 73 kVA 69 kVA 22.4 kVA 39 kVA 48.7 kVA

• limited to 5 c switching at zero current maximum	1 297 A; Use minimum cross-section acc. to AC-1 rated value
limited to 5 s switching at zero current maximum     limited to 10 s switching at zero current maximum	
limited to 10 s switching at zero current maximum     limited to 20 s switching at zero current maximum	946 A; Use minimum cross-section acc. to AC-1 rated value
limited to 30 s switching at zero current maximum	610 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	486 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	- 000 4W
• at AC	5 000 1/h
operating frequency	
• at AC-1 maximum	900 1/h
• at AC-2 maximum	350 1/h
• at AC-3 maximum	850 1/h
• at AC-3e	
— maximum	850 1/h
at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	230 V
at 60 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
● at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	348 VA
• at 60 Hz	296 VA
inductive power factor with closing power of the coil	
● at 50 Hz	0.62
• at 60 Hz	0.55
apparent holding power of magnet coil at AC	
• at 50 Hz	25 VA
• at 60 Hz	18 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.35
● at 60 Hz	0.41
closing delay	
• at AC	13 50 ms
opening delay	
• at AC	10 21 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
operational current at DC-12	
at 24 V rated value	10 A
at 48 V rated value	6 A
at 60 V rated value	6 A
at 110 V rated value	3 A
at 175 V rated value     at 125 V rated value	2 A
at 220 V rated value	1A
at 600 V rated value	0.15 A
operational current at DC-13	5.1071
at 24 V rated value	6 A
₩ at 27 v Tateu value	

at 48 V rated value at 10 V rated value at 110 V rated value at 125 V rated value at 125 V rated value at 126 V rated value at 126 V rated value at 127 V rated value at 127 V rated value at 128 V rated value at 128 V rated value at 128 V rated value at 200 V rated value at 1600 V rated value at 1600 V rated value  contact reliability of auxiliary contacts  I faulty switching per 100 million (17 V, 1 mA)  IU/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value at 600 V rated value at 100 V rated value at 100 V rated value at 100 V rated value at 230 V rated value at 220/230 V rated value at 220/230 V rated value at 60/480 V rated value becontact rating of auxiliary contacts according to UL  Short-circuit protection  design of the fuse link after a for short-circuit protection of the main circuit with type of coordination 1 required after 300 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA) after 600 V, 100 kA), am: 100 A (690 V, 100 kA), BS88 kA) after 600 V, 100 kA), am: 100 A (690 V, 100 kA), BS88 kA) after 600 V, 100 kA), am: 100 A (690 V, 100 kA), BS88 kA) after 600 V, 100 kA), am: 100 A (690 V, 100 kA), BS88 kA)	
at 110 V rated value at 125 V rated value at 220 V rated value at 260 V rated value at 260 V rated value  at 600 V rated value  ontact reliability of auxiliary contacts  IUL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value  at 600 V rated value  for single-phase AC motor  - at 110/120 V rated value  for 3-phase AC motor  - at 230 V rated value  for 3-phase AC motor  - at 200/208 V rated value  for 3-phase AC motor  - at 200/208 V rated value  at 460/480 V rated value  - at 220/230 V rated value  - at 575/600 V rated value  - at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit breaker for short-circuit protection  design of the fuse link  for short-circuit protection of the main circuit  - with type of coordination 1 required  which type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)  - with type of coordination 2 required	
at 125 V rated value at 220 V rated value at 260 V rated value  ontact reliability of auxiliary contacts  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 1600 V rated value at 600 V rated value  at 600 V rated value  at 600 V rated value  for single-phase AC motor  - at 110/120 V rated value  for 3-phase AC motor  - at 110/120 V rated value  for 3-phase AC motor  - at 230 V rated value  for 3-phase AC motor  - at 200/208 V rated value  at 200/208 V rated value  - at 220/230 V rated value  - at 220/230 V rated value  - at 460/480 V rated value  - at 460/480 V rated value  - at 575/600 V rated value  - at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  for short-circuit protection of the main circuit  - with type of coordination 1 required  - with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)	
at 220 V rated value at 600 V rated value at 600 V rated value  contact reliability of auxiliary contacts  1 faulty switching per 100 million (17 V, 1 mA)  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value for single-phase AC motor  - at 110/120 V rated value - at 230 V rated value at 200/208 V rated value at 200/208 V rated value - at 460/480 V rated value - at 575/600 V rated value - at 575/600 V rated value - at 575/600 V rated value - at 600 / P600  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  for short-circuit protection of the main circuit - with type of coordination 1 required - with type of coordination 2 required  GG: 250 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
ontact reliability of auxiliary contacts  I faulty switching per 100 million (17 V, 1 mA)  Outcome at 480 V rated value     ontact reliability of rated value     ontact reliability of rated value     ontact rate of the first of the first of the auxiliary contacts  I faulty switching per 100 million (17 V, 1 mA)  Outcome first of faulty switching per 100 million (17 V, 1 mA)  I faulty switching per 100 million (10 h)  I f	
contact reliability of auxiliary contacts  1 faulty switching per 100 million (17 V, 1 mA)  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  • for single-phase AC motor  — at 110/120 V rated value  • for 3-phase AC motor  — at 220/208 V rated value  • for 3-phase AC motor  — at 220/230 V rated value  • at 220/230 V rated value  — at 460/480 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  75 hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  AWA  With type of coordination 2 required  AWA  GG: 250 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)  GG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
contact reliability of auxiliary contacts  1 faulty switching per 100 million (17 V, 1 mA)  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  • for single-phase AC motor  — at 110/120 V rated value  • for 3-phase AC motor  — at 220/208 V rated value  • for 3-phase AC motor  — at 220/230 V rated value  • at 220/230 V rated value  — at 460/480 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  75 hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  AWA  With type of coordination 2 required  AWA  GG: 250 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)  GG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  • for single-phase AC motor  — at 110/120 V rated value  • for 3-phase AC motor  — at 230 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  • at 220/230 V rated value  — at 220/230 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  To hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  • at 600 V rated value  • at 10/120 V rated value  • for single-phase AC motor  — at 110/120 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  • for 3-phase AC motor  — at 200/208 V rated value  • at 220/230 V rated value  — at 460/480 V rated value  — at 460/480 V rated value  — at 575/600 V rated value  To hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
at 480 V rated value  at 600 V rated value  77 A  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value — at 230 V rated value — at 230 V rated value — of for 3-phase AC motor — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 460/480 V rated value — at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit — with type of coordination 1 required  with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
• at 600 V rated value  yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value — at 230 V rated value 20 hp  • for 3-phase AC motor — at 200/208 V rated value 30 hp — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value 75 hp — at 575/600 V rated value contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit — with type of coordination 1 required gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
yielded mechanical performance [hp]  • for single-phase AC motor  — at 110/120 V rated value — at 230 V rated value 20 hp  • for 3-phase AC motor  — at 200/208 V rated value 30 hp — at 220/230 V rated value — at 220/230 V rated value 75 hp — at 460/480 V rated value 75 hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required  with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
for single-phase AC motor         — at 110/120 V rated value         — at 230 V rated value         — at 230 V rated value         • for 3-phase AC motor         — at 200/208 V rated value         — at 220/230 V rated value         — at 220/230 V rated value         — at 460/480 V rated value         — at 575/600 V rated value         — ot 575/600 V rated value         — ot 575/600 V rated value  Contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required	
- at 110/120 V rated value - at 230 V rated value  ● for 3-phase AC motor - at 200/208 V rated value 30 hp - at 220/230 V rated value 30 hp - at 460/480 V rated value 75 hp - at 575/600 V rated value 75 hp contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link ● for short-circuit protection of the main circuit - with type of coordination 1 required with type of coordination 2 required  10 hp 20 hp 20 hp 20 hp 30 hp 4600 / P600  C characteristic: 10 A; 0.4 kA	
<ul> <li>— at 230 V rated value</li> <li>● for 3-phase AC motor</li> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> <li>— at 575/600 V rated value</li> <li>— tontact rating of auxiliary contacts according to UL</li> <li>Short-circuit protection</li> <li>design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V</li> <li>design of the fuse link</li> <li>● for short-circuit protection of the main circuit</li> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> <li>gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)</li> <li>— with type of coordination 2 required</li> <li>gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)</li> </ul>	
for 3-phase AC motor         — at 200/208 V rated value         — at 220/230 V rated value         — at 460/480 V rated value         — at 575/600 V rated value         — A600 / P600  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link         • for short-circuit protection of the main circuit         — with type of coordination 1 required	
- at 200/208 V rated value - at 220/230 V rated value - at 460/480 V rated value - at 575/600 V rated value - A600 / P600  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit - with type of coordination 1 required  with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  - with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
— at 220/230 V rated value — at 460/480 V rated value 75 hp — at 575/600 V rated value 75 hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit — with type of coordination 1 required  with type of coordination 2 required  Galacteristic: 10 A; 0.4 kA  C characteristic: 10 A; 0.4 kA  Galacteristic: 10 A; 0.4 kA  C characteristic: 10 A; 0.4 kA  Galacteristic: 10 A; 0.4 kA  C characteristic: 10 A; 0.4 kA  Galacteristic: 10 A; 0.4 kA	
— at 460/480 V rated value 75 hp — at 575/600 V rated value 75 hp  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit — with type of coordination 1 required gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
- at 575/600 V rated value  contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
contact rating of auxiliary contacts according to UL  Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
Short-circuit protection  design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  G characteristic: 10 A; 0.4 kA  GG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  GG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)	
design of the fuse link  ● for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required  GG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)  — with type of coordination 2 required  GG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	
• for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of coordination 2 required	
<ul> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> <li>— with type of coordination 2 required</li> <li>— gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88 kA)</li> <li>— with type of coordination 2 required</li> <li>— gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)</li> </ul>	
— with type of coordination 2 required gG: 160 A (690 V, 100 kA), aM: 100 A (690 V, 100 kA), BS88 kA)	200 A (415 V, 80
,	: 125 A (415 V, 80
go. 107 (1000 V, 110 V)	
Installation/ mounting/ dimensions	
	tilted femueral and
mounting position +/-180° rotation possible on vertical mounting surface; can be backward by +/- 22.5° on vertical mounting surface	lilled forward and
fastening method side-by-side mounting  Yes	
fastening method screw and snap-on mounting onto 35 mm DIN rail according to	o DIN EN 60715
height 140 mm	
width 80 mm	
depth 152 mm	
required spacing	
with side-by-side mounting	
— forwards 20 mm	
— upwards 10 mm	
— downwards 10 mm	
— at the side 0 mm	
for grounded parts	
— forwards 20 mm	
— upwards 10 mm	
— at the side 10 mm	
— downwards 10 mm	
• for live parts	
— forwards 20 mm	
— upwards 10 mm	
— downwards 10 mm	
— at the side 10 mm	
Connections/ Terminals	
type of electrical connection	
• for main current circuit screw-type terminals	
• for auxiliary and control circuit screw-type terminals	
<ul> <li>for auxiliary and control circuit</li> <li>at contactor for auxiliary contacts</li> <li>Screw-type terminals</li> </ul>	

• for main contacts	
<ul> <li>finely stranded with core end processing</li> </ul>	2x (2.5 35 mm²), 1x (2.5 50 mm²)
for AWG cables for main contacts	2x (10 1/0), 1x (10 2/0)
connectable conductor cross-section for main contacts	
• solid	2.5 16 mm²
• stranded	6 70 mm <sup>2</sup>
<ul> <li>finely stranded with core end processing</li> </ul>	2.5 50 mm²
connectable conductor cross-section for auxiliary contacts	
<ul> <li>solid or stranded</li> </ul>	0.5 2.5 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
<ul><li>— solid or stranded</li></ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
AWG number extended as coded connectable conductor cross section for main contacts	10 2/0
AWG number as coded connectable conductor cross section for auxiliary contacts	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
suitable for safety function	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	
General Product Approval	











<u>KC</u>



EMV Test Certificates Maritime application



Special Test Certificate

Type Test Certificates/Test Report







Maritime application other Railway















**Dangerous goods** 

Environment

**Transport Information** 



Environmental Confirmations

Information on the packaging

com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

nall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2046-1AL26

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RT2046-1AL26}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AL26


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2046-1AL26/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2046-1AL26&objecttype=14&gridview=view1

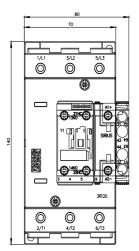

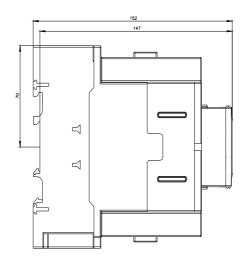

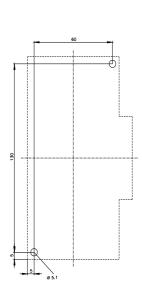

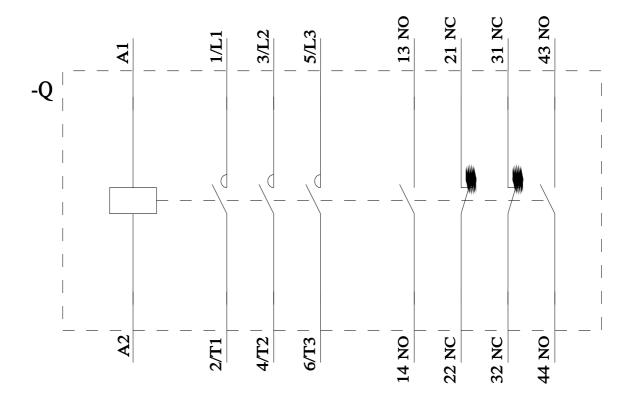

last modified: 8/22/2025 🖸