## **SIEMENS**

Data sheet 3RW5543-6HF14



SIRIUS soft starter 200-480 V 210 A, 110-250 V AC, Screw terminals Fail-safe





product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Failsafe soft starters
product type designation	3RW55
manufacturer's article number	
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00
• of communication module PROFINET high-feature usable	3RW5950-0CH00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3354-6; Type of coordination 1, lq = 65 kA
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3354-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1230-2; for supply systems up to 500 V; type of coordination 2, Iq = 65 kA
<ul> <li>of back-up R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE3333; Type of coordination 2, Iq = 65 kA
<ul> <li>of the redundant contactor for applications &gt; SIL 1 according to EN 62061</li> </ul>	<u>3RT1075</u>
<ul> <li>of the redundant contactor for applications &gt; SIL 1 at inside-delta circuit according to EN 62061</li> </ul>	<u>3RT1075</u>
<ul> <li>of the redundant contactor for applications &gt; SIL 1 according to EN ISO 13849-1</li> </ul>	3RT1076
<ul> <li>of the redundant contactor for applications &gt; SIL 1 at inside-delta circuit according to EN ISO 13849-1</li> </ul>	3RT1076
General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %

breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	5 (Substitute 5 1001 12)
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	10 00 //
for main current circuit	100 ms
• for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	11/22/2019
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol - 119-47-1 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4 Lead titanium trioxide - 12060-00-3
Weight	11.5 kg
product function	
• ramp-up (soft starting)	
• ramp-down (soft stop)	Yes
breakaway pulse	Yes Yes
• •	
adjustable current limitation	Yes
<ul><li> adjustable current limitation</li><li> creep speed in both directions of rotation</li></ul>	Yes Yes
•	Yes Yes Yes
creep speed in both directions of rotation	Yes Yes Yes Yes
<ul><li>creep speed in both directions of rotation</li><li>pump ramp down</li></ul>	Yes Yes Yes Yes Yes
<ul><li>creep speed in both directions of rotation</li><li>pump ramp down</li><li>DC braking</li></ul>	Yes Yes Yes Yes Yes Yes Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> </ul>	Yes Yes Yes Yes Yes Yes Yes Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> <li>intrinsic device protection</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> </ul>	Yes
<ul> <li>creep speed in both directions of rotation</li> <li>pump ramp down</li> <li>DC braking</li> <li>motor heating</li> <li>min/max pointer</li> <li>trace function</li> <li>intrinsic device protection</li> <li>motor overload protection</li> <li>evaluation of thermistor motor protection</li> <li>inside-delta circuit</li> <li>auto-RESET</li> <li>manual RESET</li> </ul>	Yes

• event list	Yes
error logbook	Yes
via software parameterizable	Yes
via software configurable	Yes
screw terminal	Yes
spring-loaded terminal	No
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules
• firmware update	Yes
<ul> <li>removable terminal for control circuit</li> </ul>	Yes
<ul> <li>voltage ramp</li> </ul>	Yes
• torque control	Yes
<ul><li>combined braking</li></ul>	Yes
<ul> <li>analog output</li> </ul>	Yes; 4 20 mA (default) / 0 10 V
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes
<ul> <li>condition monitoring</li> </ul>	Yes
<ul> <li>automatic parameterisation</li> </ul>	Yes
application wizards	Yes
alternative run-down	Yes
emergency operation mode	Yes
reversing operation	Yes
soft starting at heavy starting conditions	Yes
Power Electronics	
operational current	
• at 40 °C rated value	210 A
<ul> <li>at 40 °C rated value minimum</li> </ul>	42 A
• at 50 °C rated value	186 A
• at 60 °C rated value	170 A
operational current at inside-delta circuit	
at 40 °C rated value	364 A
• at 50 °C rated value	322 A
at 60 °C rated value	294 A
operating voltage	
• rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	55 kW
• at 230 V at inside-delta circuit at 40 °C rated value	110 kW
• at 400 V at 40 °C rated value	110 kW
• at 400 V at inside-delta circuit at 40 °C rated value	200 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set le
power loss [W] for rated value of the current at AC	
• at 40 °C after startup	63 W
• at 50 °C after startup	56 W
• at 60 °C after startup	51 W
power loss [W] at AC at current limitation 350 %	
• at 40 °C during startup	3 550 W
• at 50 °C during startup	2 967 W
at 60 °C during startup	2 605 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	

type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz	110 250 V
● at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 % 
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	150 mA
inrush current by closing the bypass contacts maximum	0.87 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	***************************************
number of digital inputs	4
with fail-safe	1
parameterizable	4
<ul> <li>number of digital outputs</li> </ul>	3
<ul> <li>Number of digital outputs with fail-safe</li> </ul>	1
<ul> <li>number of digital outputs parameterizable</li> </ul>	2
number of digital outputs not parameterizable	1
digital output version	2 normally-open contacts (NO) / 1 normally-closed contact (NC) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
at DC-13 at 24 V rated value	1 A
Response times	
OFF-delay time with safety-related request when switched off via control inputs maximum	100 ms
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	393 mm
width	210 mm
depth	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	10.2 kg
Connections/ Terminals	
type of electrical connection	hugher connection
for main current circuit     for control circuit	busbar connection
• for control circuit	screw-type terminals
width of connection bar maximum	45 mm

wire length for thermistor connection	
• with conductor cross-section = 0.5 mm² maximum	50 m
• with conductor cross-section = 1.5 mm² maximum	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
<ul> <li>for DIN cable lug for main contacts stranded</li> </ul>	2x (50 240 mm²)
for DIN cable lug for main contacts finely stranded	2x (70 240 mm²)
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
<ul> <li>for AWG cables for control circuit solid</li> </ul>	1x (20 12), 2x (20 14)
wire length	
between soft starter and motor maximum	800 m
<ul> <li>at the digital inputs at DC maximum</li> </ul>	1 000 m
tightening torque	
for main contacts with screw-type terminals	14 24 N·m
for auxiliary and control contacts with screw-type	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	
for main contacts with screw-type terminals	124 210 lbf-in
for auxiliary and control contacts with screw-type	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
<ul> <li>during storage and transport</li> </ul>	-40 +80 °C
environmental category	
during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul> <li>during storage according to IEC 60721</li> </ul>	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get
•	inside the devices), 1M4
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
Environmental footprint	
global warming potential [CO2 eq] total	833 kg
global warming potential [CO2 eq] during manufacturing	95.3 kg
global warming potential [CO2 eq] during sales	2.8 kg
global warming potential [CO2 eq] during operation	756 kg
global warming potential [CO2 eq] after end of life	-21 kg
Siemens Eco Profile (SEP)	Siemens EcoTech
Electromagnetic compatibility	
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
	Yes
PROFINET high-feature     Sthorklet/IR	
• EtherNet/IP	Yes
Modbus RTU  Madhus TOP	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
<ul> <li>of circuit breaker usable for Standard Faults</li> </ul>	
<ul><li>— at 460/480 V according to UL</li></ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; lq = 10 kA
— 60/480 V according to UL	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
— at 460/480 V at inside-delta circuit according to UL	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA
<ul> <li>— 60/480 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
— at 575/600 V according to UL	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA
— 75/600 V at inside-delta circuit according to UL	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA
<ul> <li>— at 575/600 V at inside-delta circuit according to UL</li> </ul>	Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA
• of the fuse	
— usable for Standard Faults up to 575/600 V	Type: Class J / L, max. 700 A; Iq = 10 kA

according to UL	
<ul> <li>usable for High Faults up to 575/600 V according to UL</li> </ul>	Type: Class J / L, max. 700 A; Iq = 100 kA
usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 700 A; Iq = 10 kA
usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 700 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	60 hp
• at 220/230 V at 50 °C rated value	60 hp
• at 460/480 V at 50 °C rated value	150 hp
at 200/208 V at inside-delta circuit at 50 °C rated value	
	100 hp
at 220/230 V at inside-delta circuit at 50 °C rated value	125 hp
at 460/480 V at inside-delta circuit at 50 °C rated value	250 hp
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	N/
product function suitable for safety function	Yes
suitability for use	
safety-related switching on	No
safety-related switching OFF	Yes
safe state	Open load circuit
function test interval maximum	1 a
diagnostics test interval by internal test function maximum	1 000 s
stop category according to IEC 60204-1	0
B10d value	147 000
average diagnostic coverage level (DCavg)	90 %
MTTFd	39 a
IEC 62061	
Safety Integrity Level (SIL) according to IEC 62061	SIL 1
PFHD with high demand rate according to IEC 62061	1E-6 1/h
ISO 13849	
performance level (PL) according to ISO 13849-1	PL c
category according to ISO 13849-1	2
IEC 61508	
Safety Integrity Level (SIL)	
<ul> <li>according to IEC 61508</li> </ul>	SIL 1
safety device type according to IEC 61508-2	Type B
PFHD with high demand rate according to IEC 61508	1E-6 1/h
PFDavg with low demand rate according to IEC 61508	0.09
Safe failure fraction (SFF)	60 %
hardware fault tolerance according to IEC 61508	0
T1 value of service life according to IEC 61508	20 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
ATEX	5 - 1315, 131 - 13
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL 1
PFHD with high demand rate according to IEC 61508 relating to ATEX	5E-7 1/h
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
hardware fault tolerance according to IEC 61508 relating to ATEX	0
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
Approvals Certificates	













EMV

For use in hazardous locations

**Functional Saftey** 

**Test Certificates** 

Maritime application

<u>KC</u>





Type Examination Certificate

Type Test Certificates/Test Report



Maritime application

other

Environment









Confirmation



**Environment** 



Environmental Confirmations

## **Further information**

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5543-6HF14

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5543-6HF14

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5543-6HF14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5543-6HF14&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5543-6HF14/char


Characteristic: Installation altitude


 $\underline{\text{http://www.automation.siemens.com/bilddb/index.aspx?view=Search\&mlfb=3RW5543-6HF14\&objecttype=14\&gridview=view1}$ 

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

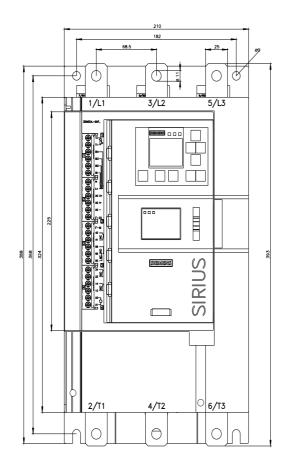

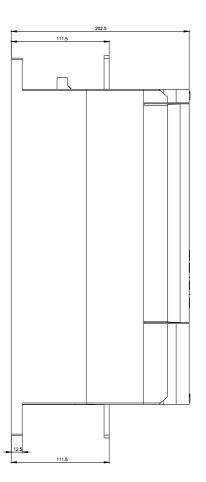

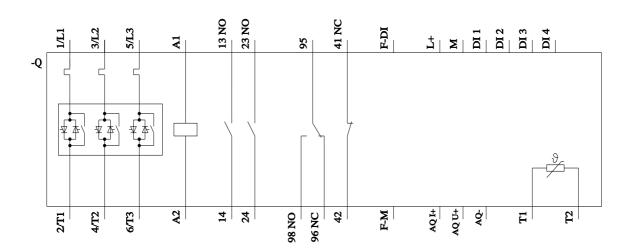

last modified: 9/5/2025 🖸

