## **SIEMENS**

Data sheet 3RT2036-1AP00



power contactor, AC-3e/AC-3, 51 A, 22 kW / 400 V, 3-pole, 230 V AC, 50 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S2  $\,$ 

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT2
General technical data	
size of contactor	S2
product extension	
<ul> <li>function module for communication</li> </ul>	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	12 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	4 W
without load current share typical	6 W
type of calculation of power loss depending on pole	quadratic
insulation voltage	
<ul> <li>of main circuit with degree of pollution 3 rated value</li> </ul>	690 V
of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
• at AC	11.8g / 5 ms, 7.4g / 10 ms
shock resistance with sine pulse	
• at AC	18.5g / 5 ms, 11.6g / 10 ms
mechanical service life (operating cycles)	
<ul> <li>of contactor typical</li> </ul>	10 000 000
<ul> <li>of the contactor with added electronically optimized auxiliary switch block typical</li> </ul>	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014
Weight	0.989 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Environmental footprint	
Environmental Product Declaration(EPD)	Yes
global warming potential [CO2 eq] total	236 kg
global warming potential [CO2 eq] during manufacturing	4.11 kg
global warming potential [CO2 eq] during operation	233 kg
global warming potential [CO2 eq] after end of life	-0.635 kg
Main circuit	orsecting.
number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
operating voltage	
at AC-3 rated value maximum	690 V
• at AC-3e rated value maximum	690 V
operational current	
<ul> <li>at AC-1 at 400 V at ambient temperature 40 °C rated</li> </ul>	70 A
value	
• at AC-1	
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	70 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	60 A
• at AC-3	
— at 400 V rated value	51 A
— at 500 V rated value	51 A
— at 690 V rated value	24 A
• at AC-3e	
— at 400 V rated value	51 A
— at 500 V rated value	51 A
— at 690 V rated value	24 A
<ul> <li>at AC-4 at 400 V rated value</li> </ul>	41 A
<ul> <li>at AC-5a up to 690 V rated value</li> </ul>	61.6 A
<ul> <li>at AC-5b up to 400 V rated value</li> </ul>	41.5 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	43.2 A
<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	43.2 A
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	43.2 A
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	24 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	28.8 A
— up to 400 V for current peak value n=30 rated value	28.8 A
— up to 500 V for current peak value n=30 rated value	28.8 A
— up to 690 V for current peak value n=30 rated value	24 A
minimum cross-section in main circuit at maximum AC-1 rated value	25 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	24 A
at 690 V rated value	20 A
operational current	
at 1 current path at DC-1     at 24 V reted value.	SE A
— at 24 V rated value	55 A
— at 60 V rated value	23 A 4.5 A
— at 110 V rated value — at 220 V rated value	4.5 A 1 A
— at 440 V rated value	0.4 A
— at 440 V rated value  — at 600 V rated value	0.4 A 0.25 A
	0.20 A
with 2 current paths in series at DC-1     at 24 V rated value.	55 A
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A

— at 600 V rated value	0.8 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	45 A
— at 440 V rated value	2.9 A
— at 600 V rated value	1.4 A
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	35 A
— at 60 V rated value	6 A
— at 220 V rated value	1A
— at 440 V rated value	0.1 A
— at 600 V rated value	0.06 A
with 2 current paths in series at DC-3 at DC-5	0.0071
— at 24 V rated value	55 A
— at 60 V rated value	45 A
— at 110 V rated value	25 A
— at 220 V rated value	5 A
— at 440 V rated value	0.27 A
— at 600 V rated value	0.16 A
with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	55 A
— at 60 V rated value	55 A
— at 110 V rated value	55 A
— at 220 V rated value	25 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.35 A
operating power	
<ul> <li>at AC-2 at 400 V rated value</li> </ul>	22 kW
• at AC-3	
— at 230 V rated value	15 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	22 kW
• at AC-3e	
— at 230 V rated value	15 kW
— at 400 V rated value	22 kW
— at 500 V rated value	30 kW
— at 690 V rated value	22 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	12.6 kW
• at 690 V rated value	18.2 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	17.2 kVA
• up to 400 V for current peak value n=20 rated value	29.9 kVA
• up to 500 V for current peak value n=20 rated value	37.4 kVA
• up to 690 V for current peak value n=20 rated value	28.6 kVA
operating apparent power at AC-6a	
up to 230 V for current peak value n=30 rated value	11.4 kVA
• up to 400 V for current peak value n=30 rated value	19.9 kVA
up to 500 V for current peak value n=30 rated value	24.9 kVA
• up to 690 V for current peak value n=30 rated value	28.6 kVA
short-time withstand current in cold operating state up to	
40 °C	
<ul> <li>limited to 1 s switching at zero current maximum</li> </ul>	937 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 5 s switching at zero current maximum</li> </ul>	697 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 10 s switching at zero current maximum</li> </ul>	468 A; Use minimum cross-section acc. to AC-1 rated value
<ul> <li>limited to 30 s switching at zero current maximum</li> </ul>	282 A; Use minimum cross-section acc. to AC-1 rated value
Iimited to 60 s switching at zero current maximum	229 A; Use minimum cross-section acc. to AC-1 rated value

no-load switching frequency	
• at AC	5 000 1/h
operating frequency	
at AC-1 maximum	1 000 1/h
• at AC-2 maximum	600 1/h
• at AC-3 maximum	800 1/h
• at AC-3e	
— maximum	800 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
at 50 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 1.1
apparent pick-up power of magnet coil at AC	
● at 50 Hz	190 VA
inductive power factor with closing power of the coil	0.70
• at 50 Hz	0.72
apparent holding power of magnet coil at AC	40.14
• at 50 Hz	16 VA
inductive power factor with the holding power of the coil	0.07
• at 50 Hz	0.37
closing delay	
• at AC	10 80 ms
opening delay	
• at AC	10 18 ms
arcing time	10 20 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
operational current at AC-15  • at 230 V rated value	10 A
	10 A 3 A
• at 230 V rated value	
<ul><li>at 230 V rated value</li><li>at 400 V rated value</li></ul>	3 A
<ul><li>at 230 V rated value</li><li>at 400 V rated value</li><li>at 500 V rated value</li></ul>	3 A 2 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul>	3 A 2 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12	3 A 2 A 1 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12 <ul> <li>at 24 V rated value</li> </ul>	3 A 2 A 1 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> </ul>	3 A 2 A 1 A 10 A 6 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 60 V rated value	3 A 2 A 1 A 10 A 6 A 6 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> <b>operational current at DC-12</b> <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value operational current at DC-13	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 220 V rated value at 24 V rated value at 25 V rated value at 24 V rated value at 24 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> Operational current at DC-12 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> </ul> Operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A  10 A 2 A 1 A 0.15 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 60 V rated value at 610 V rated value at 6110 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> </ul> operational current at DC-12 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> </ul> operational current at DC-13 <ul> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 148 V rated value at 148 V rated value at 148 V rated value at 150 V rated value at 110 V rated value at 125 V rated value at 220 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 220 V rated value at 600 V rated value at 24 V rated value at 148 V rated value at 148 V rated value at 140 V rated value at 150 V rated value at 160 V rated value at 160 V rated value at 170 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 48 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 48 V rated value at 600 V rated value at 48 V rated value at 48 V rated value at 48 V rated value at 60 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A
at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value  operational current at DC-12 at 24 V rated value at 60 V rated value at 60 V rated value at 110 V rated value at 125 V rated value at 600 V rated value at 48 V rated value at 110 V rated value at 600 V rated value	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A
<ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> <li>at 690 V rated value</li> <li>operational current at DC-12</li> <li>at 24 V rated value</li> <li>at 48 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 220 V rated value</li> <li>at 600 V rated value</li> <li>at 600 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 24 V rated value</li> <li>at 60 V rated value</li> <li>at 110 V rated value</li> <li>at 125 V rated value</li> <li>at 600 V rated value</li> </ul>	3 A 2 A 1 A  10 A 6 A 6 A 3 A 2 A 1 A 0.15 A  10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A

at COO V mate division	50 A
at 600 V rated value	52 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	3 hp
— at 230 V rated value	10 hp
<ul> <li>for 3-phase AC motor</li> </ul>	
— at 200/208 V rated value	15 hp
— at 220/230 V rated value	15 hp
— at 460/480 V rated value	40 hp
— at 575/600 V rated value	50 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
— with type of coordination 1 required	gG: 160 A (690 V, 100 kA), aM: 80 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)
<ul> <li>— with type of coordination 2 required</li> </ul>	gG: 80 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 63 A (415 V, 80 kA)
• for short-circuit protection of the auxiliary switch required	gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and
	backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	114 mm
width	55 mm
depth	130 mm
required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
	O IIIIII
• for grounded parts	10
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
<ul> <li>for live parts</li> </ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
at contactor for auxiliary contacts	Screw-type terminals
• of magnet coil	Screw-type terminals
type of connectable conductor cross-sections	<i>A</i> · · ·
• for main contacts	
— solid or stranded	2x (1 35 mm²), 1x (1 50 mm²)
	2x (1 35 mm²), 1x (1 35 mm²)  2x (1 25 mm²), 1x (1 35 mm²)
— finely stranded with core end processing	
for AWG cables for main contacts	2x (18 2), 1x (18 1)
connectable conductor cross-section for main contacts	4 05 3
finely stranded with core end processing	1 35 mm²
connectable conductor cross-section for auxiliary contacts	
solid or stranded	0.5 2.5 mm²
finely stranded with core end processing	0.5 2.5 mm²
type of connectable conductor cross-sections	

<ul> <li>for auxiliary contacts</li> </ul>	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14)
AWG number as coded connectable conductor cross section for main contacts	18 1
AWG number as coded connectable conductor cross section for auxiliary contacts	20 14
Safety related data	
product function	
<ul> <li>mirror contact according to IEC 60947-4-1</li> </ul>	Yes
<ul> <li>positively driven operation according to IEC 60947-5-1</li> </ul>	No
<ul> <li>suitable for safety function</li> </ul>	Yes
suitability for use safety-related switching OFF	Yes
service life maximum	20 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	73 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Approvals Certificates	

## **General Product Approval**









<u>KC</u>



EMV Test Certificates Maritime application



Type Test Certificates/Test Report

Special Test Certificate







Maritime application other









Confirmation

Confirmation

Railway Dangerous goods Environment

Special Test Certificate

<u>Transport Information</u>



Environmental Confirmations

Further informatior

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage

https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2036-1AP00

Cax online generator

https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2036-1AP00

 $Service \& Support\ (Manuals,\ Certificates,\ Characteristics,\ FAQs,...)$ 

https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-1AP00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


https://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2036-1AP00&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2036-1AP00/char


Further characteristics (e.g. electrical endurance, switching frequency)

https://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2036-1AP00&objecttype=14&gridview=view1







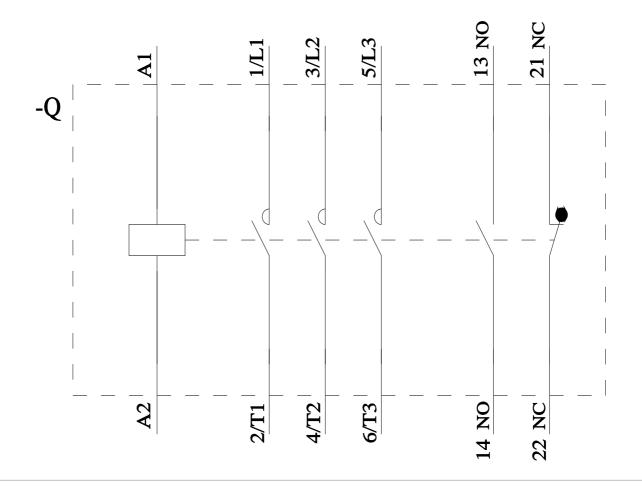

last modified: 10/21/2025 🖸