



power contactor, AC-3e/AC-3, 38 A, 18.5 kW / 400 V, 3-pole, 220 V AC, 50 Hz / 240 V, 60 Hz, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S0

|  |                            |
|--|----------------------------|
| product brand name   | SIRIUS                     |
| product designation  | Power contactor            |
| product type designation   | 3RT2                       |
| <b>General technical data</b>  |                            |
| size of contactor  | S0                         |
| product extension  |                            |
| • function module for communication  | No                         |
| • auxiliary switch   | Yes                        |
| power loss [W] for rated value of the current  |                            |
| • at AC in hot operating state   | 9.6 W                      |
| • at AC in hot operating state per pole  | 3.2 W                      |
| • without load current share typical   | 2.7 W                      |
| type of calculation of power loss depending on pole  | quadratic                  |
| insulation voltage   |                            |
| • of main circuit with degree of pollution 3 rated value   | 690 V                      |
| • of auxiliary circuit with degree of pollution 3 rated value  | 690 V                      |
| surge voltage resistance   |                            |
| • of main circuit rated value  | 6 kV                       |
| • of auxiliary circuit rated value   | 6 kV                       |
| maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1 | 400 V                      |
| shock resistance at rectangular impulse  |                            |
| • at AC  | 8,3g / 5 ms, 5,3g / 10 ms  |
| shock resistance with sine pulse   |                            |
| • at AC  | 13,5g / 5 ms, 8,3g / 10 ms |
| mechanical service life (operating cycles)   |                            |
| • of contactor typical   | 10 000 000                 |
| • of the contactor with added electronically optimized auxiliary switch block typical                        | 5 000 000                  |
| • of the contactor with added auxiliary switch block typical   | 10 000 000                 |
| reference code according to IEC 81346-2  | Q                          |
| Substance Prohibitance (Date)  | 10/01/2009                 |
| Net Weight   | 0.422 kg                   |
| <b>Ambient conditions</b>  |                            |
| installation altitude at height above sea level maximum  | 2 000 m                    |
| ambient temperature  |                            |
| • during operation   | -25 ... +60 °C             |
| • during storage   | -55 ... +80 °C             |
| relative humidity minimum  | 10 %                       |
| relative humidity at 55 °C according to IEC 60068-2-30   | 95 %                       |

|  |                    |
|--|--------------------|
| <b>maximum</b>   |                    |
| <b>Environmental footprint</b>   |                    |
| Environmental Product Declaration (EPD)                                | Yes                |
| global warming potential [CO2 eq] total                                | 74.2 kg            |
| global warming potential [CO2 eq] during manufacturing                 | 1.9 kg             |
| global warming potential [CO2 eq] during operation                     | 72.4 kg            |
| global warming potential [CO2 eq] after end of life                    | -0.117 kg          |
| <b>Main circuit</b>  |                    |
| <b>number of poles for main current circuit</b>                        | 3                  |
| <b>number of NO contacts for main contacts</b>                         | 3                  |
| <b>number of NC contacts for main contacts</b>                         | 0                  |
| <b>operating voltage</b>   |                    |
| • at AC-3 rated value maximum  | 690 V              |
| • at AC-3e rated value maximum   | 690 V              |
| <b>operational current</b>   |                    |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value            | 50 A               |
| • at AC-1  |                    |
| — up to 690 V at ambient temperature 40 °C rated value                 | 50 A               |
| — up to 690 V at ambient temperature 60 °C rated value                 | 42 A               |
| • at AC-3  |                    |
| — at 400 V rated value   | 38 A               |
| — at 500 V rated value   | 32 A               |
| — at 690 V rated value   | 21 A               |
| • at AC-3e   |                    |
| — at 400 V rated value   | 38 A               |
| — at 500 V rated value   | 32 A               |
| — at 690 V rated value   | 21 A               |
| • at AC-4 at 400 V rated value   | 22 A               |
| • at AC-5a up to 690 V rated value                                     | 44 A               |
| • at AC-5b up to 400 V rated value                                     | 31.5 A             |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=20 rated value                  | 30.8 A             |
| — up to 400 V for current peak value n=20 rated value                  | 30.8 A             |
| — up to 500 V for current peak value n=20 rated value                  | 30.8 A             |
| — up to 690 V for current peak value n=20 rated value                  | 21 A               |
| • at AC-6a   |                    |
| — up to 230 V for current peak value n=30 rated value                  | 20.5 A             |
| — up to 400 V for current peak value n=30 rated value                  | 20.5 A             |
| — up to 500 V for current peak value n=30 rated value                  | 21.4 A             |
| — up to 690 V for current peak value n=30 rated value                  | 21 A               |
| minimum cross-section in main circuit at maximum AC-1 rated value      | 10 mm <sup>2</sup> |
| <b>operational current for approx. 200000 operating cycles at AC-4</b> |                    |
| • at 400 V rated value   | 12 A               |
| • at 690 V rated value   | 12 A               |
| <b>operational current</b>   |                    |
| • <b>at 1 current path at DC-1</b>                                     |                    |
| — at 24 V rated value  | 35 A               |
| — at 60 V rated value  | 20 A               |
| — at 110 V rated value   | 4.5 A              |
| — at 220 V rated value   | 1 A                |
| — at 440 V rated value   | 0.4 A              |
| — at 600 V rated value   | 0.25 A             |
| • <b>with 2 current paths in series at DC-1</b>                        |                    |
| — at 24 V rated value  | 35 A               |
| — at 60 V rated value  | 35 A               |

|   |   |
|---|---|
| — at 110 V rated value  | 35 A  |
| — at 220 V rated value  | 5 A   |
| — at 440 V rated value  | 1 A   |
| — at 600 V rated value  | 0.8 A   |
| ● <b>with 3 current paths in series at DC-1</b>                         |   |
| — at 24 V rated value   | 35 A  |
| — at 60 V rated value   | 35 A  |
| — at 110 V rated value  | 35 A  |
| — at 220 V rated value  | 35 A  |
| — at 440 V rated value  | 2.9 A   |
| — at 600 V rated value  | 1.4 A   |
| ● <b>at 1 current path at DC-3 at DC-5</b>                              |   |
| — at 24 V rated value   | 20 A  |
| — at 60 V rated value   | 5 A   |
| — at 220 V rated value  | 1 A   |
| — at 440 V rated value  | 0.09 A  |
| — at 600 V rated value  | 0.06 A  |
| ● <b>with 2 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 35 A  |
| — at 60 V rated value   | 35 A  |
| — at 110 V rated value  | 15 A  |
| — at 220 V rated value  | 3 A   |
| — at 440 V rated value  | 0.27 A  |
| — at 600 V rated value  | 0.16 A  |
| ● <b>with 3 current paths in series at DC-3 at DC-5</b>                 |   |
| — at 24 V rated value   | 35 A  |
| — at 60 V rated value   | 35 A  |
| — at 110 V rated value  | 35 A  |
| — at 220 V rated value  | 10 A  |
| — at 440 V rated value  | 0.6 A   |
| — at 600 V rated value  | 0.6 A   |
| <b>operating power</b>  |   |
| ● at AC-3   |   |
| — at 230 V rated value  | 11 kW   |
| — at 400 V rated value  | 18.5 kW   |
| — at 500 V rated value  | 18.5 kW   |
| — at 690 V rated value  | 18.5 kW   |
| ● at AC-3e  |   |
| — at 230 V rated value  | 11 kW   |
| — at 400 V rated value  | 18.5 kW   |
| — at 500 V rated value  | 18.5 kW   |
| — at 690 V rated value  | 18.5 kW   |
| <b>operating power for approx. 200000 operating cycles at AC-4</b>      |   |
| ● at 400 V rated value  | 6 kW  |
| ● at 690 V rated value  | 10.3 kW   |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=20 rated value                   | 12.2 kVA  |
| ● up to 400 V for current peak value n=20 rated value                   | 21.3 kVA  |
| ● up to 500 V for current peak value n=20 rated value                   | 26.6 kVA  |
| ● up to 690 V for current peak value n=20 rated value                   | 25 kVA  |
| <b>operating apparent power at AC-6a</b>                                |   |
| ● up to 230 V for current peak value n=30 rated value                   | 8.1 kVA   |
| ● up to 400 V for current peak value n=30 rated value                   | 14.2 kVA  |
| ● up to 500 V for current peak value n=30 rated value                   | 18.5 kVA  |
| ● up to 690 V for current peak value n=30 rated value                   | 25 kVA  |
| <b>short-time withstand current in cold operating state up to 40 °C</b> |   |
| ● limited to 1 s switching at zero current maximum                      | 593 A; Use minimum cross-section acc. to AC-1 rated value |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• limited to 5 s switching at zero current maximum</li> <li>• limited to 10 s switching at zero current maximum</li> <li>• limited to 30 s switching at zero current maximum</li> <li>• limited to 60 s switching at zero current maximum</li> </ul> | 341 A; Use minimum cross-section acc. to AC-1 rated value<br>260 A; Use minimum cross-section acc. to AC-1 rated value<br>199 A; Use minimum cross-section acc. to AC-1 rated value<br>162 A; Use minimum cross-section acc. to AC-1 rated value |
| <b>no-load switching frequency</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 5 000 1/h  |
| <b>operating frequency</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC-1 maximum</li> </ul>   | 1 000 1/h  |
| <ul style="list-style-type: none"> <li>• at AC-2 maximum</li> </ul>   | 750 1/h  |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>   | 750 1/h  |
| <ul style="list-style-type: none"> <li>• at AC-3e</li> <li>— maximum</li> </ul>   | 750 1/h  |
| <ul style="list-style-type: none"> <li>• at AC-4 maximum</li> </ul>   | 250 1/h  |
| <b>Control circuit/ Control</b>   |  |
| <b>type of voltage of the control supply voltage</b>  | AC   |
| <b>control supply voltage at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>  | 220 V  |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>  | 240 V  |
| <b>operating range factor control supply voltage rated value of magnet coil at AC</b>   |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.8 ... 1.1  |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 0.8 ... 1.1  |
| <b>apparent pick-up power of magnet coil at AC</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 81 VA  |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 79 VA  |
| <b>inductive power factor with closing power of the coil</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.72   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 0.74   |
| <b>apparent holding power of magnet coil at AC</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 10.5 VA  |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 8.5 VA   |
| <b>inductive power factor with the holding power of the coil</b>  |  |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>  | 0.25   |
| <ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>  | 0.28   |
| <b>closing delay</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 8 ... 40 ms  |
| <b>opening delay</b>  |  |
| <ul style="list-style-type: none"> <li>• at AC</li> </ul>   | 4 ... 16 ms  |
| <b>arcing time</b>  | 10 ... 10 ms   |
| <b>control version of the switch operating mechanism</b>  | Standard A1 - A2   |
| <b>Auxiliary circuit</b>  |  |
| number of NC contacts for auxiliary contacts instantaneous contact  | 1  |
| number of NO contacts for auxiliary contacts instantaneous contact  | 1  |
| operational current at AC-12 maximum  | 10 A   |
| <b>operational current at AC-15</b>   |  |
| <ul style="list-style-type: none"> <li>• at 230 V rated value</li> </ul>  | 10 A   |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>  | 3 A  |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>  | 2 A  |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>  | 1 A  |
| <b>operational current at DC-12</b>   |  |
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> </ul>   | 10 A   |
| <ul style="list-style-type: none"> <li>• at 48 V rated value</li> </ul>   | 6 A  |
| <ul style="list-style-type: none"> <li>• at 60 V rated value</li> </ul>   | 6 A  |
| <ul style="list-style-type: none"> <li>• at 110 V rated value</li> </ul>  | 3 A  |
| <ul style="list-style-type: none"> <li>• at 125 V rated value</li> </ul>  | 2 A  |
| <ul style="list-style-type: none"> <li>• at 220 V rated value</li> </ul>  | 1 A  |
| <ul style="list-style-type: none"> <li>• at 600 V rated value</li> </ul>  | 0.15 A   |
| <b>operational current at DC-13</b>   |  |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 48 V rated value</li> <li>• at 60 V rated value</li> <li>• at 110 V rated value</li> <li>• at 125 V rated value</li> <li>• at 220 V rated value</li> <li>• at 600 V rated value</li> </ul>   | 10 A<br>2 A<br>2 A<br>1 A<br>0.9 A<br>0.3 A<br>0.1 A   |
| <b>contact reliability of auxiliary contacts</b>  | 1 faulty switching per 100 million (17 V, 1 mA)  |
| <b>UL/CSA ratings</b>   |  |
| <b>full-load current (FLA) for 3-phase AC motor</b>   |  |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 34 A<br>27 A   |
| <b>yielded mechanical performance [hp]</b>  |  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>   | 3 hp<br>5 hp<br><br>10 hp<br>10 hp<br>25 hp<br>25 hp   |
| <b>contact rating of auxiliary contacts according to UL</b>   | A600 / P600  |
| <b>Category Control Number (CCN)</b>  | E31519 (NLDX, NLDX7)   |
| <b>Short-circuit protection</b>   |  |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V   | C characteristic: 10 A; 0.4 kA   |
| <b>design of the fuse link</b> <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of coordination 1 required</li> <li>— with type of coordination 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>  | gG: 125 A (690 V, 100 kA), aM: 50 A (690 V, 100 kA), BS88: 125 A (415 V, 80 kA)<br>gG: 50 A (690 V, 100 kA), aM: 25 A (690 V, 100 kA), BS88: 50 A (415 V, 80 kA)<br>gG: 10 A (500 V, 1 kA) |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface   |
| fastening method side-by-side mounting  | Yes  |
| <b>fastening method</b>   | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715   |
| <b>height</b>   | 85 mm  |
| <b>width</b>  | 45 mm  |
| <b>depth</b>  | 97 mm  |
| <b>required spacing</b> <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | 10 mm<br>10 mm<br>10 mm<br>0 mm<br><br>10 mm<br>10 mm<br>6 mm<br>10 mm<br><br>10 mm<br>10 mm<br>10 mm<br>6 mm  |
| <b>Connections/ Terminals</b>   |  |
| <b>type of electrical connection</b>  |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>   | screw-type terminals<br>screw-type terminals   |

|   |  |
|---|--|
| <ul style="list-style-type: none"> <li>• at contactor for auxiliary contacts</li> <li>• of magnet coil</li> </ul>   | Screw-type terminals<br>Screw-type terminals   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for main contacts</li> </ul> | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )<br>2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup><br>2x (16 ... 12), 2x (14 ... 8) |
| <b>connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• finely stranded with core end processing</li> </ul>  | 1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup><br>1 ... 10 mm <sup>2</sup>   |
| <b>connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid or stranded</li> <li>• finely stranded with core end processing</li> </ul>   | 0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup>   |
| <b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG cables for auxiliary contacts</li> </ul>        | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14)   |
| <b>AWG number as coded connectable conductor cross section for main contacts</b>  | 16 ... 8   |
| <b>AWG number as coded connectable conductor cross section for auxiliary contacts</b>   | 20 ... 14  |
| <b>Safety related data</b>  |  |
| <b>product function</b>   |  |
| <ul style="list-style-type: none"> <li>• mirror contact according to IEC 60947-4-1</li> <li>• positively driven operation according to IEC 60947-5-1</li> <li>• suitable for safety function</li> </ul>   | Yes<br>No<br>Yes   |
| suitability for use safety-related switching OFF  | Yes  |
| <b>service life maximum</b>   | 20 a   |
| <b>test wear-related service life necessary</b>   | Yes  |
| <b>proportion of dangerous failures</b>   |  |
| <ul style="list-style-type: none"> <li>• with low demand rate according to SN 31920</li> <li>• with high demand rate according to SN 31920</li> </ul>   | 40 %<br>73 %   |
| <b>B10 value with high demand rate according to SN 31920</b>  | 1 000 000  |
| <b>failure rate [FIT] with low demand rate according to SN 31920</b>  | 100 FIT  |
| <b>ISO 13849</b>  |  |
| <b>device type according to ISO 13849-1</b>   | 3  |
| <b>overdimensioning according to ISO 13849-2 necessary</b>  | Yes  |
| <b>IEC 61508</b>  |  |
| <b>safety device type according to IEC 61508-2</b>  | Type A   |
| <b>Electrical Safety</b>  |  |
| <b>protection class IP on the front according to IEC 60529</b>  | IP20   |
| <b>touch protection on the front according to IEC 60529</b>   | finger-safe, for vertical contact from the front   |
| <b>Approvals Certificates</b>   |  |
| <b>General Product Approval</b>   |  |


[KC](#)

|                          |     |                   |                      |
|--------------------------|-----|-------------------|----------------------|
| General Product Approval | EMV | Test Certificates | Maritime application |
|--------------------------|-----|-------------------|----------------------|



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Maritime application

other



[Miscellaneous](#)



other

Railway

Environment

[Confirmation](#)

[Confirmation](#)

[Special Test Certificate](#)



[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2028-1AP60>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2028-1AP60>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2028-1AP60&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2028-1AP60&lang=en)

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2028-1AP60>


Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP='HAUPT'></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP='HAUPT'></mmp_prod_no>)

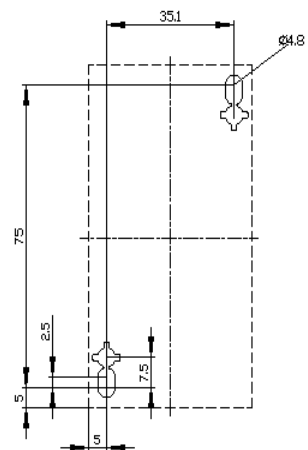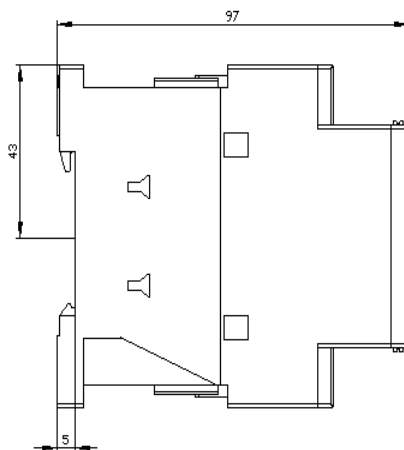



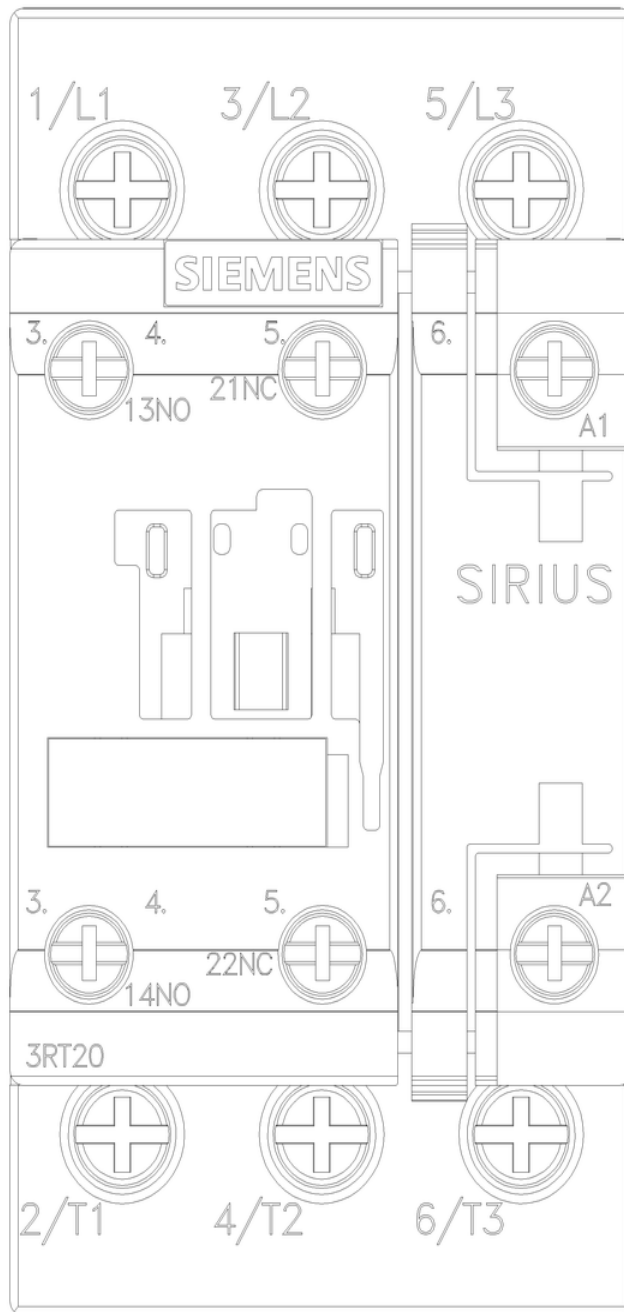

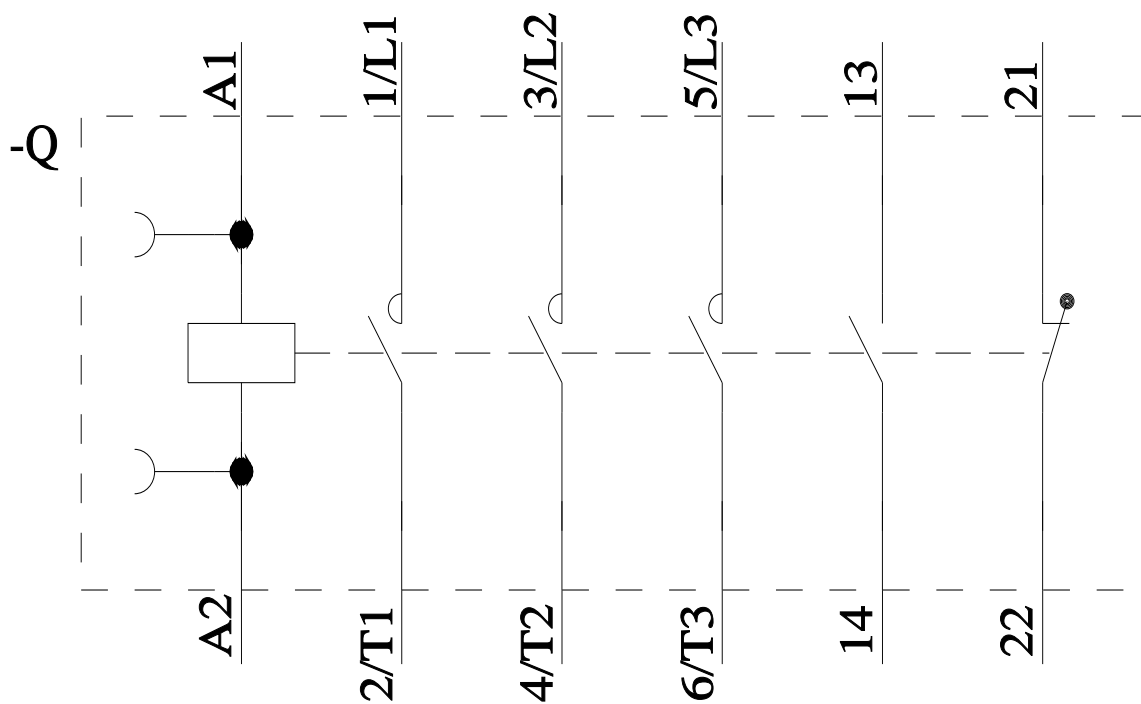

last modified:

11/27/2025 