

stay connected

## Modlink MSDD set contains:Frame 4000-68522-0000001

Insert 4000-68000-4100000

Art.No.: 4000-68522-4100001

Weight: 0.424

Country of origin: US

Model designation: MSDD\_2transparent\_GFCI 15A+RJ45+USB A+3A

with touch protection


## **Link to Product**

## Illustration







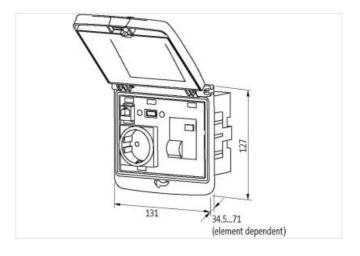

Product may differ from Image





Commercial data	
ECLASS-6.0	27189234
ECLASS-7.0	27189234
ECLASS-8.0	27189234
ECLASS-9.0	27189234
ETIM-5.0	EC002625
customs tariff number	85366990

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-10-19



stay connected

customs tariff number	85366990
customs tariff number	85366990
EAN	4048879673525
EAN	4048879673525
EAN	4048879673525
Packaging unit	1
Packaging unit	1
Packaging unit	<u> </u>
Frame	
Degree of protection (EN IEC 60529)	IP65
Operating temperature min.	-30 °C
Operating temperature max.	70 °C
	-30 °C
Storage temperature min.	
Storage temperature max.	80 °C
Suitable for installation wall thickness min.	1 mm
Suitable for installation wall thickness max.	5 mm
Material housing	PA
Color housing	black
Material lid	PC
Color cover	transparent
Fuse	
Operating voltage AC	250 V
Operating voltage DC	32 V
Nominal current	3 A
USA	
Connection cross section max.	6 mm²
AWG number max.	10
Operating voltage AC	125 V
Operating current	15 A
Connection	Screw terminals SK
No. of poles	2 + PE
Connections per pole	2
Protection contact present	yes
USB	
Operating voltage AC	48 V
Operating voltage DC	48 V
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	42,4 V
Operating current	1,5 A
USB specification	3.0
Data transmission rate max.	5000 MBit/s
Looking techniques	Snap-in connector
RJ45	
Operating voltage AC max. (UL-listed)	30 V
Operating voltage DC max. (UL-listed)	42,4 V
Current operating max. (UL)	175 mA
Family construction form	RJ45
Family type Back side	RJ45
Cable category min.	Cat5e
Looking techniques	Snap-in connector