

SVS Eco valve plug CI-9.4mm screw terminal

2-pol. + FE, max. 0,5mm², 4 -6mm, LED+VDR 24V

Art.No.: 7000-30205-0000000

Weight: 0.02

Country of origin: HU

Model designation: MSVSE-RB1X-M12 SVS Eco LED

Form CI (9.4 mm)

24 V AC/DC $\pm 15\%$

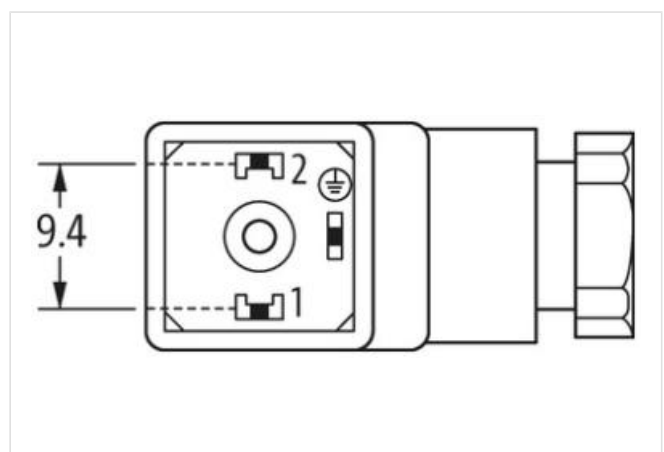
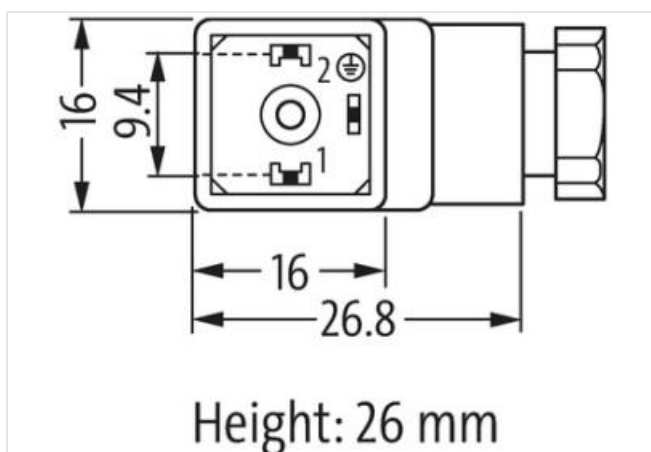
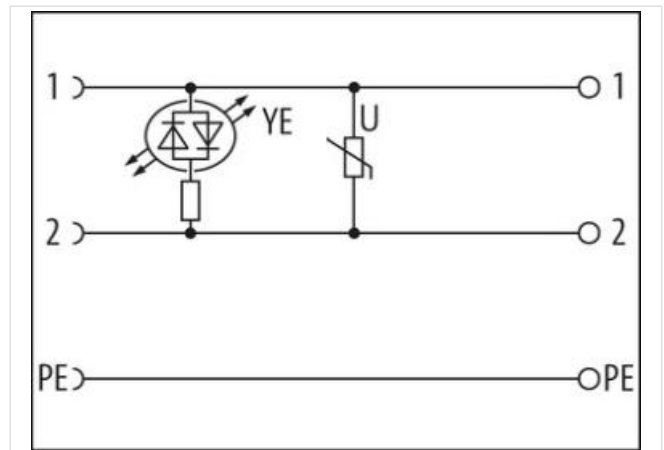
LED and VDR

metric

Field wireable (screw terminals)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image



Side 1

Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
Commercial data	
ECLASS-6.0	27279221
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440105
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002635
customs tariff number	85366990
customs tariff number	85366990
GTIN	4048879186964
GTIN	4048879186964
Packaging unit	1
Packaging unit	1
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	20,4 V
Operating voltage AC max.	26,4 V
Operating voltage DC	24 V
Operating voltage DC min.	20,4 V
Operating voltage DC max.	26,4 V
Current operating per contact max.	1,5 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section min.	0,34 mm ²
Connection cross section max.	0,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M12 x 1.5
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor
Mechanical data Material data	
Material housing	PA
Color housing	opaque
Material gasket	NBR
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	4 mm
Clamping range max.	6 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C

Operating temperature max. 90 °C

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.