

M12 female 0° A-cod. IDC

5-pol., 0,34 - 0,5mm², 4,7 - 6mm

Art.No.: 7000-12593-0000000

Weight: 0.028

Country of origin: RO

Model designation: MSBL0-AC-U MOSA 0,34-0,5qmm

Female straight

M12, 5-pole



IDC terminals

Connection cross section: 0.34...0.5 mm²

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

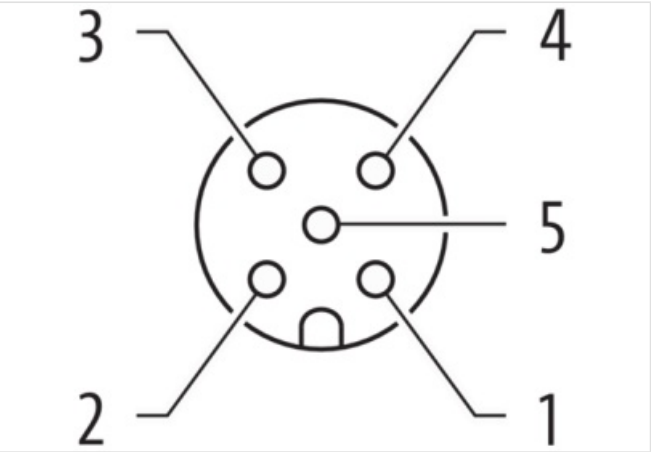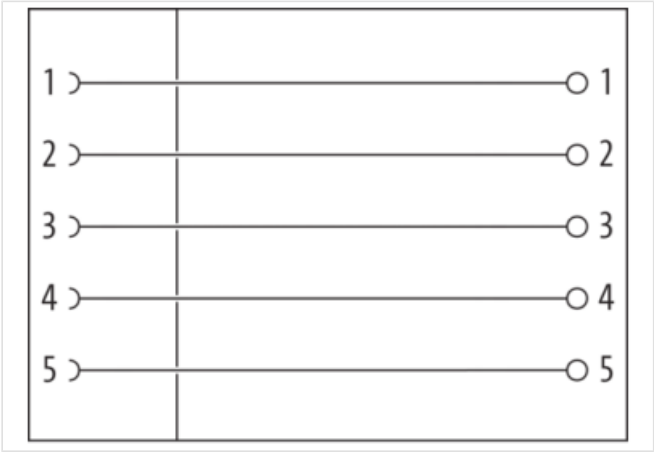

Product may differ from Image



Header

Material short text MSBL0-AC-U MOSA 0,34-0,5qmm

Side 1

Family construction form	M12
Degree of protection (EN IEC 60529)	IP67
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-12593-0000000
GTIN	4048879306003
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-7.1	27440102
ECLASS-8.0	27440102
ECLASS-8.1	27440102
ECLASS-9.0	27440116
ECLASS-9.1	27440106
ECLASS-10.0.1	27440106
ECLASS-10.1	27440102
ECLASS-11.0	27440106
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440106
ECLASS-14.0	27440106
ETIM-5.0	EC002635
ETIM-6.0	EC002635
ETIM-7.0	EC002635
ETIM-8.0	EC002635
customs tariff number	85366990
EAN	4048879306003
Packaging unit	1
Electrical data Supply	
Operating voltage AC max.	50 V
Operating voltage DC max.	50 V
Current operating per contact max.	4 A
Installation	
Single wire diameter min.	0.1 mm
Connection cross section min.	0.34 mm ²
Connection cross section max.	0.5 mm ²
Installation Connection	
Wire insulation diameter min.	1.2 mm
Wire insulation diameter max.	2 mm
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data Mounting data	
Height	49 mm
Width	20.5 mm
Depth	20.5 mm
Clamping range min.	4.7 mm
Clamping range max.	6 mm
Environmental characteristics Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Important installation notes	

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.