

FMC00004-50CM DATA SHEET

BNC Male to BNC Male Cable RG-223 Coax with Heat Shrink in 50 CM length

The BNC male to BNC male 50 cm cable using RG223 coax, part number FMC00004-50CM, from Fairview Microwave is in-stock and ships same day. This Fairview BNC to BNC cable assembly has a male to male gender configuration with 50 ohm flexible RG223 coax. Fairview Microwave's flexible RF cable assemblies are ideal for applications where tight bends and continual flexure are required. The FMC00004-50CM BNC male to BNC male cable assembly operates to 4 GHz. The double shielding of this Fairview cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур	Max	Units
Frequency Range	DC			4	GHz
VSWR				1.4:1	
Velocity of Propagation		(66		%
Capacitance		30.8 [101.05]			pF/ft [pF/m
Operating Voltage (AC)				500	Vrms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
Insertion Loss (Typ.)	0.13	0.2	0.29	0.42	0.88	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly

Length* 19.68 in [499.87 mm] Weight 0.087 lbs [39.46 g]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Shield Layer 2

RG223 50 Ohms Solid Copper, Silver

PE 2

> Silver Plated Copper Braid Silver Plated Copper Braid



Configuration:

- BNC Male
- BNC Male
- RG223

Features:

- Max Frequency 4 GHz
- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications:

- General Purpose
- · Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689

www.fairviewmicrowave.com sales@fairviewmicrowave.com





Jacket Material Jacket Diameter PVC, Black

0.209 in [5.31 mm]

Repeated Minimum Bend Radius

1 in [25.4 mm]

Connectors

Description	Connector 1	Connector 2		
Туре	BNC Male	BNC Male		
Impedance	50 Ohms	50 Ohms		
Contact Material & Plating	Brass, Gold	Brass, Gold		
Contact Plating Spec.	30μ in. minimum	30µ in. minimum		
Dielectric Type	PTFE	PTFE		
Outer Cond Material & Plati	ng Brass, Nickel	Brass, Nickel		
Body Material & Plating	Brass, Nickel	Brass, Nickel		
Body Plating Spec.	100µ in. minimum	n 100µ in. minimum		

Environmental Specifications

Temperature

Operating Range


-40 to +80 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

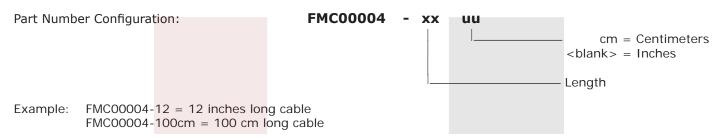

BNC Male to BNC Male Cable RG-223 Coax with Heat Shrink in 50 CM length from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: BNC Male to BNC Male Cable RG-223 Coax with Heat Shrink in 50 CM length FMC00004-50CM

URL: https://www.fairviewmicrowave.com/bnc-male-to-bnc-male-cable-rg223-coax-in-50-cm-fmc00004-50cm-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





