

FMCA2293-48 DATA SHEET

SMA Male to SMA Female Bulkhead Cable RG405 Type .086 Coax in 48 Inch

The SMA male to SMA female bulkhead 48 inch cable using RG405 type .086 coax, part number FMCA2293-48, from Fairview Microwave is in-stock and ships same day. This Fairview SMA to SMA cable assembly has a male to female gender configuration with 50 ohm semi-rigid FM-SR086ALTN coax. Fairview Microwave's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. The FMCA2293-48 SMA male to SMA female cable assembly operates to 18 GHz. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other RF cable assembly value added services including connector orientation or clocking, heat shrink booting and labeling are also available. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Min	Т	ур	Max	Units
Frequency Range	DC			18	GHz
VSWR				1.5:1	
Dielectric Withstanding \	/oltage (AC)			5,000	Vrms

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Typ.)	1.12	1.38	2.03	3.19	5.04	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1dB per connector loss.

Mechanical Specifications

Cable Assembly

Length* 48 in [121.92 cm]
Diameter 0.433 in [11 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Outer Conductor Material and Plating

Outer Conductor Diameter

FM-SR086ALTN
50 Ohms
Solid
Copper Clad Steel, Silver
PTFE
1
Tinned Aluminum
0.086 in [2.18 mm]



Configuration:

- SMA Male
- SMA Female Bulkhead
- FM-SR086ALTN

Features:

Max Frequency 18 GHz

Applications:

- General Purpose
- Laboratory Use

Fairview Microwave 301 Leora Ln., Suite 100 Lewisville, TX 75056 Tel: 1-800-715-4396 / (972) 649-6678 Fax: (972) 649-6689





One Time Minimum Bend Radius

0.05 in [1.27 mm]

Connectors

Description	Connect	Connector 1 Connector 2			
Туре	SMA M	SMA Male		SMA Female	
Mount Method				Bulkhead	
Impedance	50 Ohr	50 Ohms 50 Ohms		ıs	
Contact Material & Plating	Brass, Gold ov	er NickelE	Beryllium Copper, G	iold over I	
Dielectric Type	PTFE	PTFE		PTFE	
Body Material & Plating	Brass, Gold ov	er Nickel	Brass, Gold ove	er Nickel	
Coupling Nut Material & Pla	ting Passivated Stai	nless Stee			
Hex Size	5/16 in	ich			
Torque	8 in-lbs 0.	9 Nm			
	<u> </u>				

Environmental Specifications

Temperature


Operating Range -55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

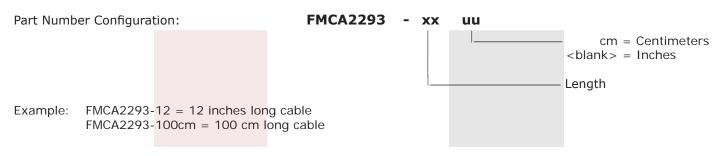

SMA Male to SMA Female Bulkhead Cable RG405 Type .086 Coax in 48 Inch from Fairview Microwave has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link to obtain additional part information: SMA Male to SMA Female Bulkhead Cable RG405 Type .086 Coax in 48 Inch FMCA2293-48

URL: https://www.fairviewmicrowave.com/sma-male-sma-female-cable-rg405-type-.086-coax-fmca2293-48-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

301 Leora Ln., Suite 100, Lewisville, TX 75056 | Tel: 1-800-715-4396 / (972) 649-6678 / Fax: (972) 649-6689





