

BGSC4331MN10

Ultra compact 40V_{RF} switch+ C-tuner combo


Features

- 0.2 - 3.5 pF 8 steps tunable capacitor with bypass switch
- 3 ultra low R_{ON} RF switch throws of 1.25 Ω in ON state
- RF operating voltage handling 40 V in OFF state
- MIPI RFFE 2.1 control interface
- Digital control of the ESD switch enabling an additional shunt to ground throw
- 1.8 V and 1.2 V_{VIO} operation
- Extremely low current consumption of 20 μ A in ACTIVE mode
- Ultra small form factor 0.95 mm x 1.3 mm (MSL1, 260 °C per JEDEC J-STD-020)



Potential applications

- Impedance tuning
- Antenna tuning
- Tunable RF matching
- Tunable filtering



Potential applications

- Qualified for industrial applications according to the relevant tests of JEDEC47/20/22.

Description

The BGSC4331MN10 is a combo of series tunable capacitor and RF switch throws optimized for RF applications.

Block diagram and ordering information

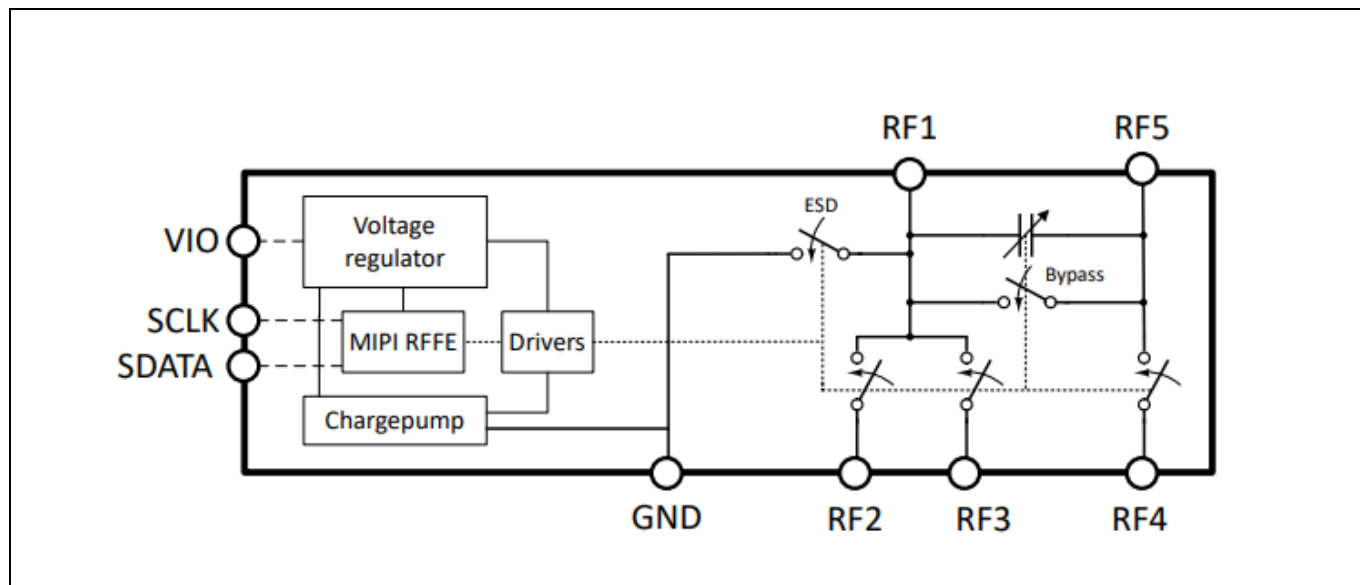


Figure 1 BGSC4331MN10 Block diagram

For more technical information, please contact our Technical Assistance Center or your local Infineon representative.

Table 1 Ordering Information

Type	Marking	Package	Product name
BGSC4331MN10	C4	TSNP-10-10	BGSC 4331MN10 E6327

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2019-09-16

Published by

Infineon Technologies AG
81726 München, Germany

© 2025 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about this document?

Email: erratum@infineon.com

Document reference

ifx1

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.