


Aug.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

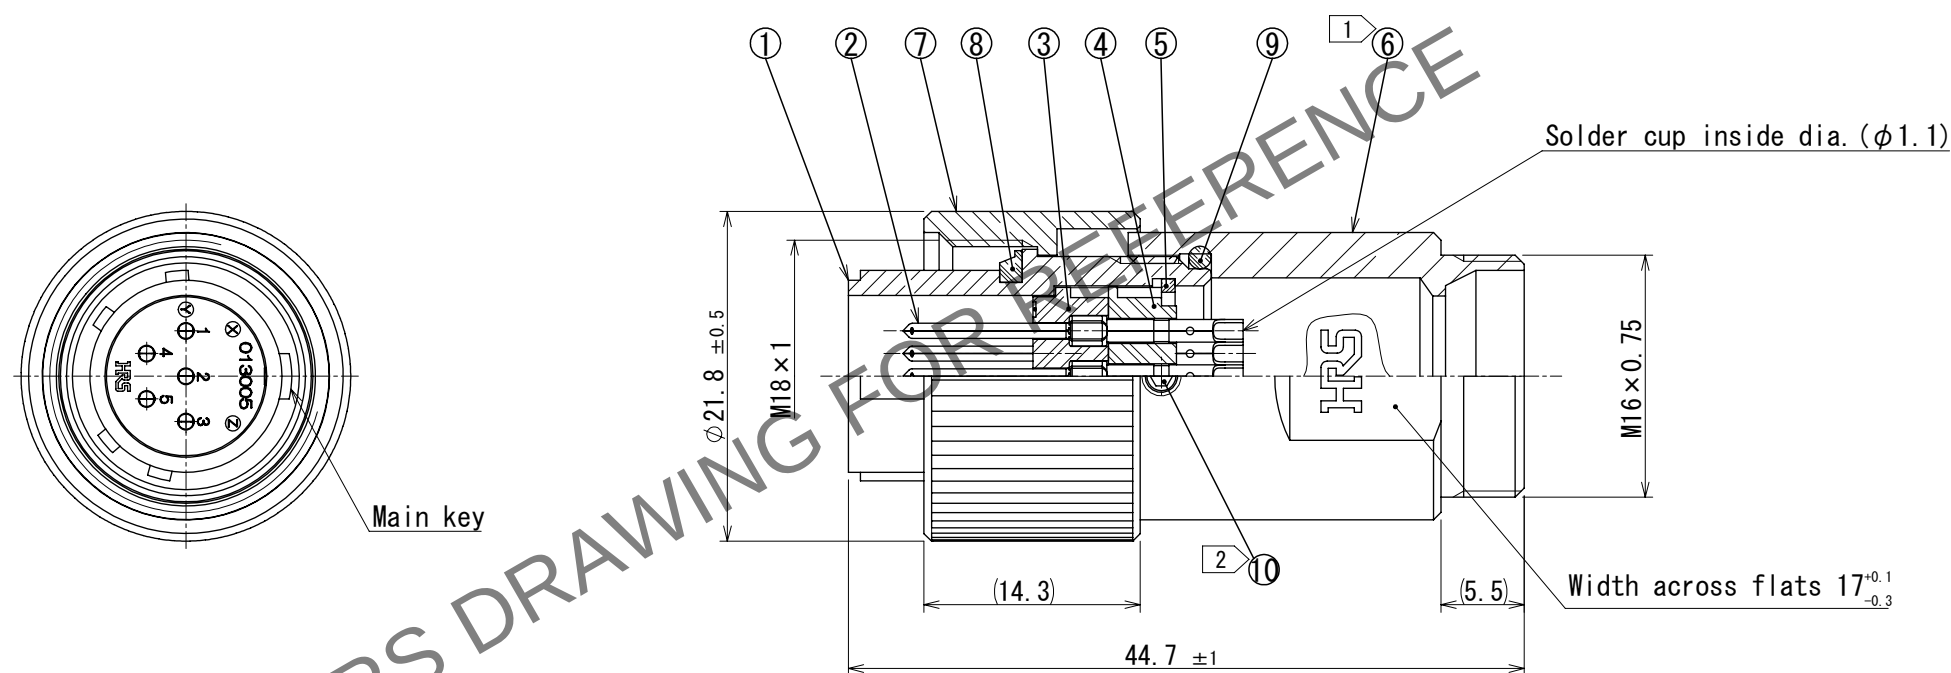

- Notes
- 1 The recommended tightening torque of Ref.No. ⑥ shall be 2 to 2.5 N・m.
 - 2 The recommended tightening torque of Ref.No. ⑩ shall be 0.2 to 0.25 N・m.
 - 3 One example of the rotation of Ref.No. ⑥ to Ref.No. ① is shown.
 - 4 Apply Loctite 263 HENKEL JAPAN or equivalent to the male threaded portion of Ref. No. ⑥ and ⑩ in order to prevent loosening.
 - 5 This products to be used with cable clamp, JR13WCC-*.
*designate diameter (mm) of applicable cable.
 - 6 The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.

5	Phosphor bronze	Nickel plating	10	Stainless steel	HEX:1.27
4	Polyphenylene sulfide	(Black) UL94V-0	9	Silicon rubber	(Black)
3	Polyphenylene sulfide	(Black) UL94V-0	8	Silicon rubber	(Black)
2	Copper alloy	Silver plating 3μm min.	7	Brass	Black chrome plating
1	Aluminum alloy	Black chrome plating	6	Brass	Black chrome plating
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
		2:1							
		APPROVED : EJ. KUNII2023. 12. 07					DRAWING NO. EDC-404958-00-00		
		CHECKED : EJ. KUNII2023. 12. 07					PART NO. JR13WPH-5P		
		DESIGNED : SY. KONDO2023. 12. 07					CODE NO. CL0114-0062-0-00		
HRS HIROSE ELECTRIC CO.,LTD.		DRAWN : KR. SUZUKI2023. 12. 07							1 1