

ACT20P-VMR-3PH-ILP-H-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image****ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Release levers simplify handling

General ordering data

Version	Limit value monitoring, Input : 3 phase, Input: 3-phase voltage, Relay output
Order No.	7760054165
Type	ACT20P-VMR-3PH-ILP-H-S
GTIN (EAN)	6944 169689086
Qty.	1 pc(s).

ACT20P-VMR-3PH-ILP-H-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	114.3 mm	Depth (inches)	4.5 inch
Height	117 mm	Height (inches)	4.606 inch
Width	22.5 mm	Width (inches)	0.886 inch
Net weight	233 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-20 °C...60 °C
Humidity at operating temperature	0...95 % (no condensation)	Humidity	5...85 % rel. humidity, no condensation

Probability of failure

SIL in compliance with IEC 61508	None
----------------------------------	------

Input

Input frequency	40...60 Hz	Input measurement range	200...480 VAC
Input resistance, voltage	≥ 1,8 MΩ	Input voltage	180...500 VAC
Number of inputs	1	Type	3-phase or 3-phase plus zero conductor, AC voltage

Output

Number of outputs	2
-------------------	---

Output (digital)

Alarm function	Top and bottom limit values, window range, Holding function can be activated, Phase error, Phase sequence, Asymmetry, Alarm delay: 0...10 s	Hysteresis	5 % @ Phase asymmetry
Max. switching voltage, AC	250 V	Max. switching voltage, DC	30 V
Number of digital outputs	2	Rated switching current	5 A
Switch-on delay	0...10 s, configurable	Switching thresholds	Adjustable, MIN = 50... 100 % x U_{Rated} input voltage (undervoltage alarm), MAX = 70...120 % x U_{Rated} input voltage (overvoltage alarm)
Type	2 x 1 - or 1 x 2 changeover contact relay, Relay polarity can be inverted		

General data

Accuracy	3 % * U_{Rated} voltage	Configuration	DIP switch and potentiometer
Long-term drift	0.1 % / 10.000 h	Nominal power consumption	1.5 VA
Operating altitude	≤ 2000 m	Power consumption	≤ 3VA, <2 W
Protection degree	IP20	Rail	TS 35
Repeat accuracy	2 % * U_{Rated} voltage	Step response time	≤ 100 ms
Temperature coefficient	350 ppm/K	Voltage supply	supplied from voltage measurement inputs

ACT20P-VMR-3PH-ILP-H-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Insulation coordination**

EMC standards	EN 61326-1	Galvanic isolation	between input / output / supply / relay
Impulse withstand voltage	6 kV (input - output), 4 kV (output 1 - output 2), 1.2/50 µs	Insulation voltage	2.5 kV (input / output)
Pollution severity	2	Rated voltage	600 VAC (input - output), 300 VAC (output 1 - output 2)
Surge voltage category	III	Test voltage	0.5 kV

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	1.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Classifications

ETIM 6.0	EC002654	ETIM 7.0	EC002654
ETIM 8.0	EC002654	ETIM 9.0	EC002654
ETIM 10.0	EC002654	ECLASS 9.0	27-21-01-22
ECLASS 9.1	27-21-01-22	ECLASS 10.0	27-21-01-22
ECLASS 11.0	27-21-01-22	ECLASS 12.0	27-21-01-22
ECLASS 13.0	27-21-01-22	ECLASS 14.0	27-21-01-22
ECLASS 15.0	27-21-01-22		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

Important note

Product information	ACT20P-VMR-3PH-ILP-H is a three-phase voltage setpoint limit monitor relay (3-phase or 3-phase plus zero conductor). The device is powered by the input measuring circuit. The device incorporates two separate relay outputs which trigger an alarm upon phase asymmetry, phase loss, phase sequence errors and phase angle errors and when exceeding or falling below preset voltage limit values. The alarm can also be set to trigger after an adjustable time delay. Features • Supply from the input measuring circuit • Manual front-sided configuration via DIP switch, potentiometer and rotary switch • Various alarm functions: phase asymmetry, phase loss, phase sequence errors, phase angle errors, alarm delay, upper/lower limit value alarm, window alarm • Front LEDs indicates operation status and malfunction. • 3-way galvanic isolation between input, output 1 and output 2.
---------------------	---

ACT20P-VMR-3PH-ILP-H-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Technical data****Approvals**

Approvals



Approvals MAMID	https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/
-----------------	---

ROHS	Conform
------	---------

UL File Number Search	UL Website
-----------------------	------------

Certificate No. (cURus)	E469563
-------------------------	---------

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Software	DIP switch configuration tool
User Documentation	Instruction sheet
Catalogues	Catalogues in PDF-format


ACT20P-VMR-3PH-ILP-H-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings


Connection diagram

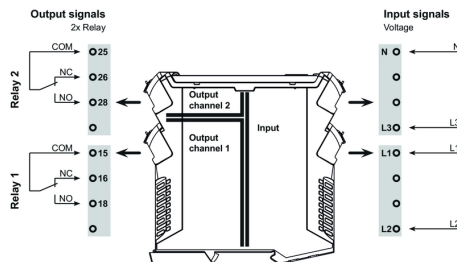


Dimensioned drawing

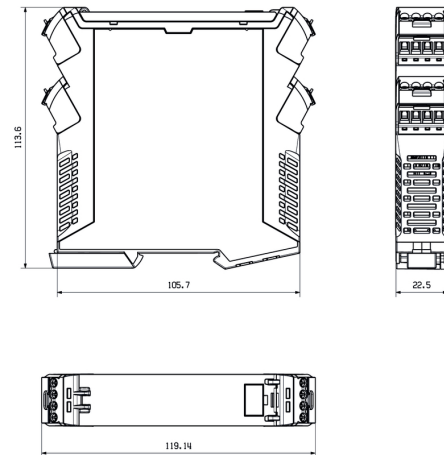



Overvoltage alarm (O)

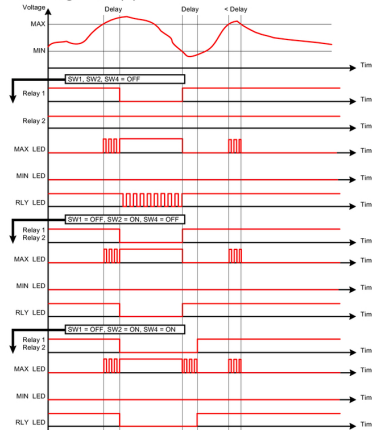

Undervoltage alarm (U)

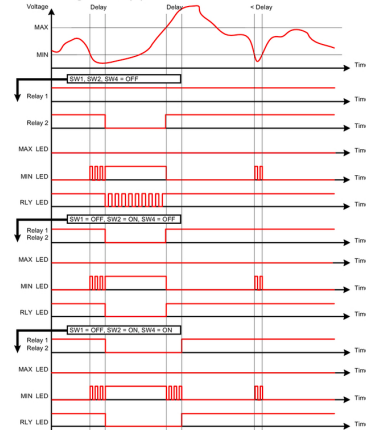

Window alarm (W)

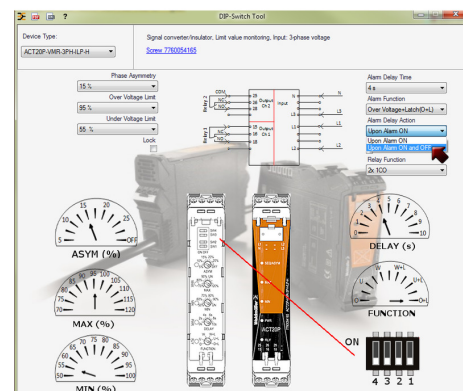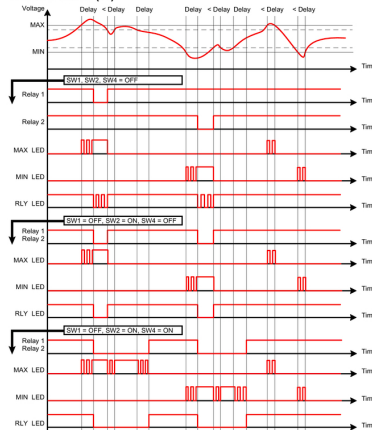

example for DIP switch setting (with ACT20 tool)