

San Ace 80

GA type

Low Power Consumption Fan

Features

Low Power Consumption

Power consumption is reduced by approximately 35% compared with our conventional product.*1

High Air Flow and High Static Pressure

Maximum air flow increased by approximately 1.2 times and maximum static pressure increased by approximately 1.7 times compared with our conventional product.*2

Low Noise

Sound pressure level is reduced by 2 dB(A) compared with our conventional product.*1

*1: Specification of Model No. 9GA0812P7S001.

Our conventional product is 80 x 80 x 15 mm "San Ace 80", Model No. 9PH0812P7S06.

*2: Specification of Model No. 9GA0812P7G001.

Our conventional product is 80 x 80 x 15 mm "San Ace 80", Model No. 9PH0812P7S06.



80×80×15_{mm}

Specifications

With PWM control function · With pulse sensor

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	PWM Duty Cycle ^{Note1)} [%]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Air Flow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inch H ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life ^{Note2)} [h]
9GA0812P7G001	12	10.2 to 13.8	100	0.29	3.48	6,100	1.44 50.9	84.0 0.34	41	-20 to +70	40,000/60°C (70,000/40°C)
9GA0812P7S001			100	0.17	2.04	5,000	1.18 41.7	56.4 0.23	37		
9GA0824P7G001	24	20.4 to 27.6	100	0.13	3.12	6,100	1.44 50.9	84.0 0.34	41		
9GA0824P7S001			100	0.08	1.92	5,000	1.18 41.7	56.4 0.23	37		

Note1 : PWM Frequency : 25kHz Fans do not rotate when PWM duty cycle is 0%.

Note2 : Expected life at 40°C ambient is just reference value.

With pulse sensor

Model No.	Rated Voltage [V]	Operating Voltage Range [V]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Air Flow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inch H ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life ^{Note)} [h]
9GA0812H7001	12	6 to 13.2	0.09	1.08	3,800	0.89 31.4	32.6 0.13	29	-20 to +70	40,000/60°C (70,000/40°C)
9GA0824H7001	24	12 to 26.4	0.05	1.20	3,800	0.89 31.4	32.6 0.13	29		

Note : Expected life at 40°C ambient is just reference value.


Common Specifications

- ☐ Material Frame, Impeller : Plastics (Flammability: UL94V-0)
- ☐ Expected Life Varies for each model
(L10: Survival rate: 90% at 60°C, rated voltage, and continuously run in a free air state)
- ☐ Motor Protection System Current blocking function and Reverse polarity protection
- ☐ Dielectric Strength 50/60 Hz, 500VAC, 1 minute (between lead conductor and frame)
- ☐ Sound Pressure Level (SPL) Expressed as the value at 1m from air inlet side
- ☐ Operating Temperature Varies for each model (Non-condensing)
- ☐ Storage Temperature -30°C to +70°C (Non-condensing)
- ☐ Lead Wire ⊕Red ⊖Black Sensor: Yellow Control(With PWM control function): Brown
- ☐ Mass Approx. 65g


Air Flow - Static Pressure Characteristics

With PWM control function · With pulse sensor

· PWM Duty Cycle

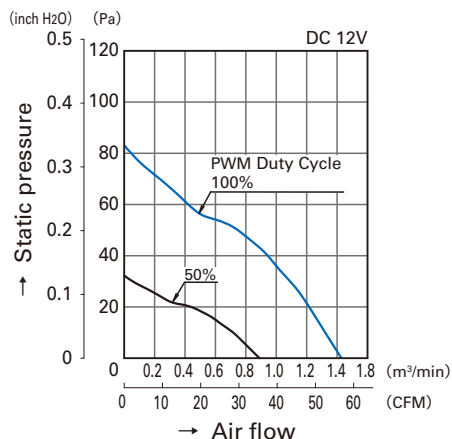


9GA0812P7G001

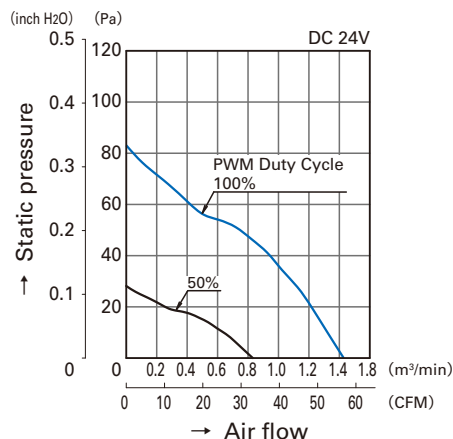


9GA0824P7G001


· Operating Voltage Range

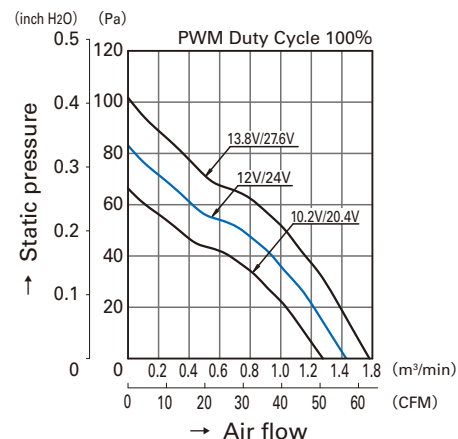


9GA0812P7G001
9GA0824P7G001

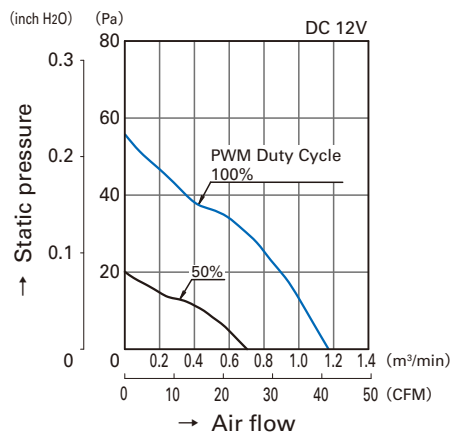

9GA0812P7S001

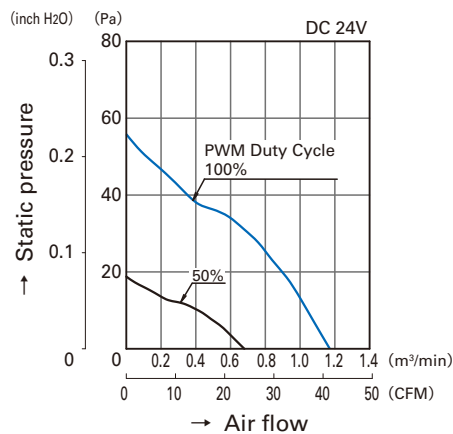


9GA0824P7S001

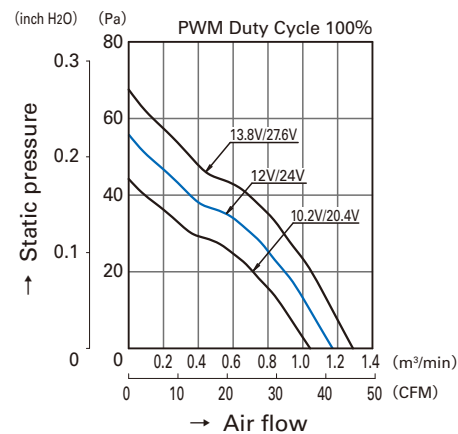

9GA0812P7S001
9GA0824P7S001





With pulse sensor

· Operating Voltage Range

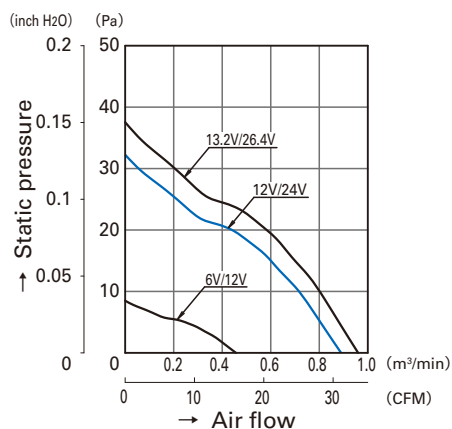


9GA0812H7001
9GA0824H7001

PWM Duty - Speed Characteristics Example

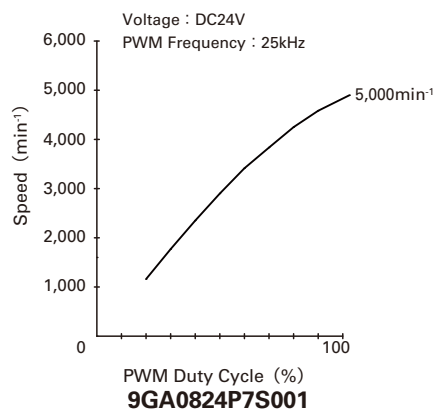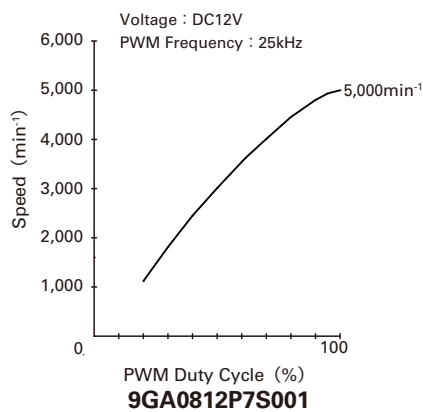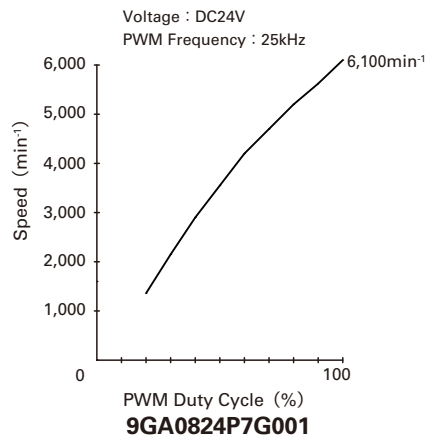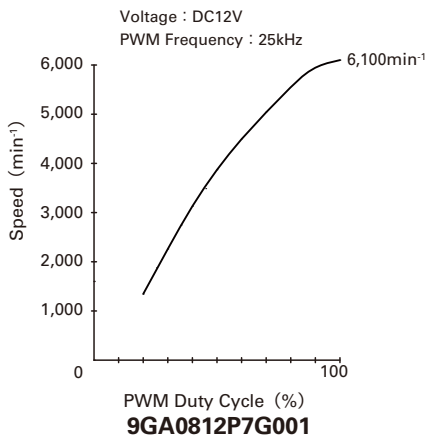

PWM Input Signal Example

Input Signal Waveform

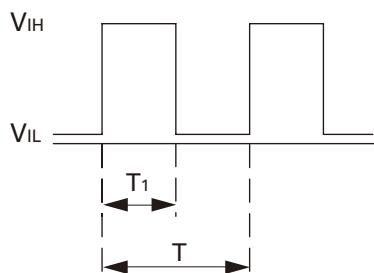

$V_{IH}=4.75V$ to $5.25V$

$V_{IL}=0V$ to $0.4V$

$$\text{PWM Duty Cycle (\%)} = \frac{T_1}{T} \times 100$$

$$\text{PWM Frequency 25 (kHz)} = \frac{1}{T}$$

Source Current : 1mA Max. at control voltage 0V


Sink Current : 1mA Max. at control voltage 5.25V

Control Terminal Voltage : 5.25V Max. (Open Circuit)

When the control lead wire is open,
the fan speed is the same as the one at a PWM duty cycle of 100% .

Either TTL input, open collector or open drain can be used for PWM control input signal.
Fans do not rotate when PWM duty cycle is 0%.

Example of Connection Schematic

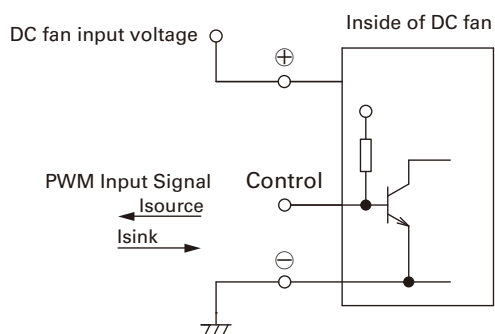

Specifications for Pulse Sensors

Output circuit : Open collector

Rated Voltage 12V Fan

$V_{CE} = +13.8V$ MAX.


$I_C = 5mA$ MAX. [$V_{OL} = V_{CE} (SAT) = 0.6V$ MAX.]

Rated Voltage 24V Fan

$V_{CE} = +27.6V$ MAX.

$I_C = 5mA$ MAX. [$V_{OL} = V_{CE} (SAT) = 0.8V$ MAX.]


Inside of DC fan

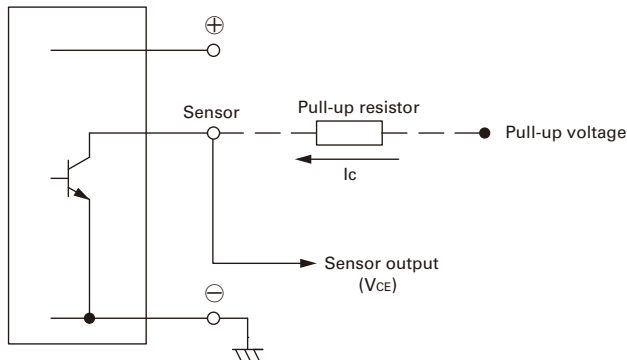

Output Waveform (Need pull-up resistor)

In case of steady running

(One revolution)

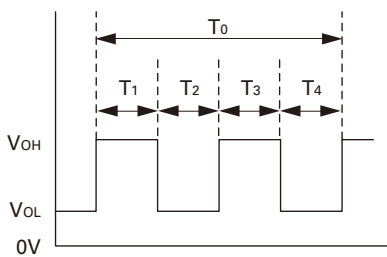


$$T_1 \sim T_4 \div (1/4) T_0$$


$$T_1 \sim T_4 \div (1/4) T_0 = 60/4N \text{ (sec)}$$

$$N = \text{Fan speed (min}^{-1}\text{)}$$

Dimensions (unit : mm) (With PWM control function, with pulse sensor)

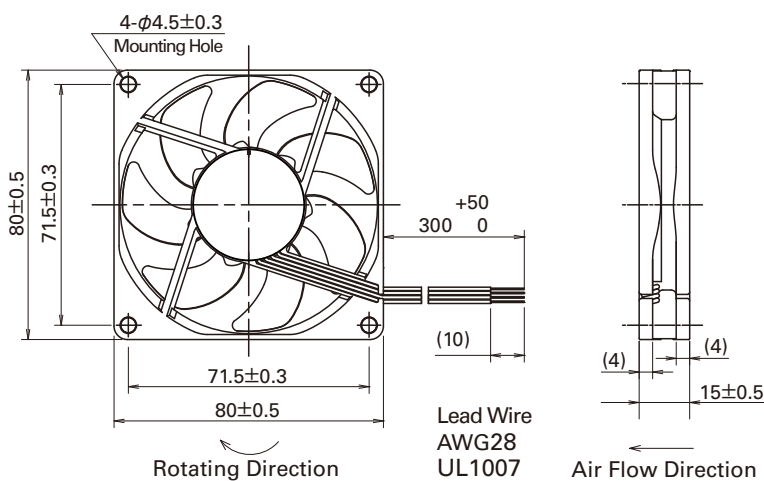

Reference Dimension of Mounting Holes and Vent Opening (unit : mm)

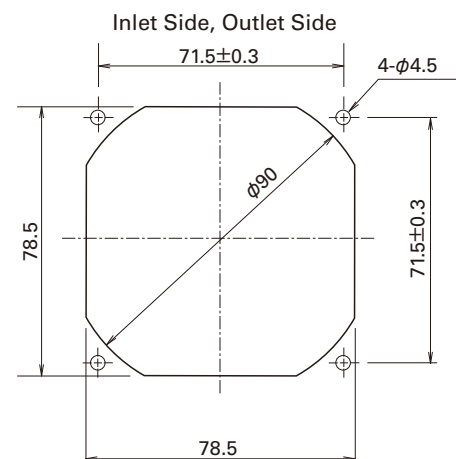

Notice

- The products shown in the catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- To protect against electrolytic corrosion that may occur in locations with strong electromagnetic noise, we provide fans that are unaffected by electrolytic corrosion.

SANYO DENKI CO.,LTD. 3-33-1, Minami-Otsuka, Toshima-ku, Tokyo, 170-8451, Japan TEL: +81 3 5927 1020

<http://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies. "San Ace" is a trademark of SANYO DENKI CO.,LTD.

Specifications are subject to change without notice.

CATALOG No. C1026B002 '13.10

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sanyo Denki:

[9GA0824P7G001](#) [9GA0812P7G001](#) [9GA0824P7S001](#) [9GA0824H7001](#) [9GA0812P7S001](#) [9GA0812H7001](#)