AC-DC Power Supplies Medical Type




















WMA

WMA-series

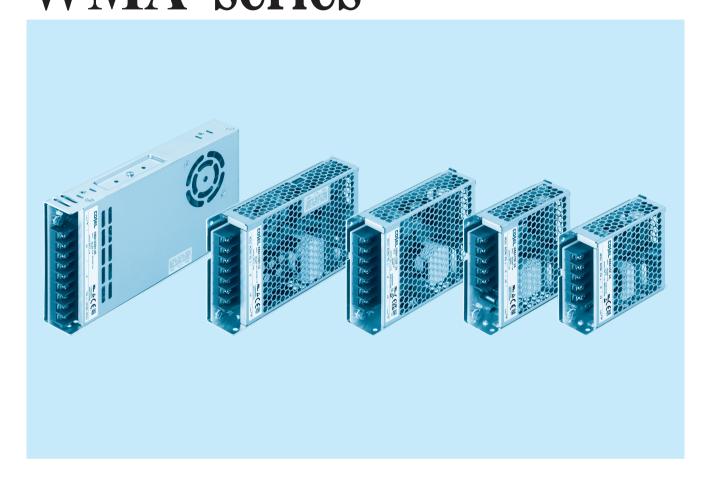

Feature

For medical electric equipment
(ANSI/AAMI ES60601-1, EN60601-1 3rd)
Medical Isolation Grade 2MOPP
4kV isolation
Low-profile
Economical design
Complies with SEMI F47(See Instruction Manual)

Safety agency approvals

ANSI/AAMI ES60601-1, EN60601-1 3rd, C-UL (CAN/CSA-C22.2 No.60601-1), UL62368-1, EN62368-1, C-UL (CAN/CSA-C22.2 No.62368-1), EN61558-2-16 (OVC III)

CE marking

Low Voltage Directive RoHS Directive

UKCA marking

Electrical Equipment Safety Regulations RoHS Regulations

5-year warranty (See Instruction Manual)

EMI

Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B


EMS Compliance : EN61204-3, EN61000-6-2 IEC60601-1-2 (2014), EN60601-1-2 (2015)

EN61000-4-2 EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6 EN61000-4-8 EN61000-4-11

WMA35F

35 F -

WMA





- Series name
 Single output
 Output wattage
- 4)Universal input
- ⑤Output voltage

- GOttonal : *6
 C:With Coating
 G: Low leakage current
 J1:VH(J.S.T.)connector type J4: EP(Tyco)connector type
- T1: Horizontal terminal block
- *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.


MODEL	WMA35F-5	WMA35F-12	WMA35F-24	WMA35F-48	
MAX OUTPUT WATTAGE[W]	35	36	36	38.4	
DC OUTPUT	5V 7A	12V 3A	24 1.5A	48V 0.8A	


	MODEL		WMA35F-5	WMA35F-12	WMA35F-24	WMA35F-48			
	VOLTAGE[V]		AC85 - 264 1 Ф						
	OUDDENITE AT	ACIN 115V	0.7						
	CURRENT[A]	ACIN 230V	0.4						
	FREQUENCY[Hz]		50/60 (47-63)						
INDUT	EEEIOIENOVIO/1	ACIN 115V	79typ	87typ					
INPUT	EFFICIENCY[%]	ACIN 230V	82typ	86typ	88typ	89typ			
	INDUOLI OLIDDENTIAL	ACIN 115V	Otyp Ta=25℃ (at cold start)						
	INRUSH CURRENT[A]	ACIN 230V	40typ Ta=25°C (at cold start)						
	LEAKAGE	ACIN 115V	0.3max						
	CURRENT[mA]	ACIN 240V	0.5max						
	VOLTAGE[V]		5	12	24	48			
	CURRENT[A]		7	3	1.5	0.8			
	WATTAGE[W]		35	36	36	38.4			
	LINE REGULATION[n	nV] *1	50max	120max	240max	480max			
	LOAD REGULATION	mV] *1	50max	120max	240max	480max			
	RIPPLE NOISE [mVp-p] *2	lo=100%	150max (Bandwidth 20MHz)					
OUTPUT	TEMPERATURE REGULATION[mV]	0~+50 ℃	100max	180max	360max	720max			
	OTABT UB TIME!1	ACIN 115V							
	START-UP TIME[ms] ACIN 230		100typ						
	ACIN 115		20typ						
	HOLD-UP TIME[ms]	ACIN 230V	60typ						
	OUTPUT VOLTAGE ADJUSTME	NT RANGE[V]	4.5 to 5.5	10.8 to 13.2	21.6 to 26.4	43.2 to 52.8			
	OUTPUT VOLTAGE SET	TING[V]	4.9 to 5.3	11.75 to 12.25	23.5 to 24.5	47.0 to 49.0			
PROTECTION	OVERCURRENT PROTEC	CTION [A]	Works over 105% of rating and recovers automatically						
CIRCUIT AND	OVERVOLTAGE PROTE	CTION[V]	5.75 to 7.00	13.8 to 16.8	27.6 to 33.6	54.0 to 67.2			
OTHERS	OPERATING INDICAT	ГІОИ	LED (Green)						
	INPUT-OUTPUT		AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 2MOPP						
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP						
	OUTPUT-FG		AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At Room Temperature)						
	OPERATING TEMP., F	HUMID.*3	-20 to +70℃, 20 - 90%RH (N	lon condensing)					
ENVIRONMENT	STORAGE TEMP.,HU	MID.	-20 to +75°C, 20 - 90%RH (Non condensing)						
ENVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s² (2G) , 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s² (20G) , 11ms, once each X, Y and Z axis						
	AGENCY APPROVAL	.s	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, ANSI/AAMI ES60601-1, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1), EN60601-1 3rd, EN61558-2-16 (OVC III), Complies with IEC60601-1-2 4th Ed.						
SAFETY AND	EMC EMISSON	-			5032-B, FCC Part 15-B, FCC F				
EMC	EMC EMMUNITY		Complies with EN61000-4-2		,,				
	HARMONIC ATTENU	IATOR*4	Complies with IEC61000-3-2 (Class A) No built-in active PFC						
	CASE SIZE/WEIGHT		30×82×99mm (W×H×D) /						
OTHERS	COOLING METHOD		Convection						
WARRANTY	WARRANTY	*5	5 years (subject to the opera	ating conditions)					
			Measure the output voltage by usi						


- *1 Consult us about dynamic load and input response. Measure the output voltage by using the
- average mode of the tester to deal with the burst operation at low (Io=0~20%Atyp) load. This is the result of measurement of the testing board with capacitors of $47 \mu \, F$ and $0.1 \mu \, F$ placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.
 When the load factor is low (lo=0~20%Atyp), the switching power loss is reduced by burst
 - operation, which will cause ripple noise to go beyond the specifications.
- *3 Output power derating is required. Refer to "Derating"
- Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
- 5 Consult us about details.
- *6 The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.
- All parameters not specially mentioned are measured at ACIN 230V, rated load and 25°C of ambient temperature.
- Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- Parallel operation is not possible with this model.
- Acoustic noise may be heard from the power supply when used for pulse load

External view

WMA

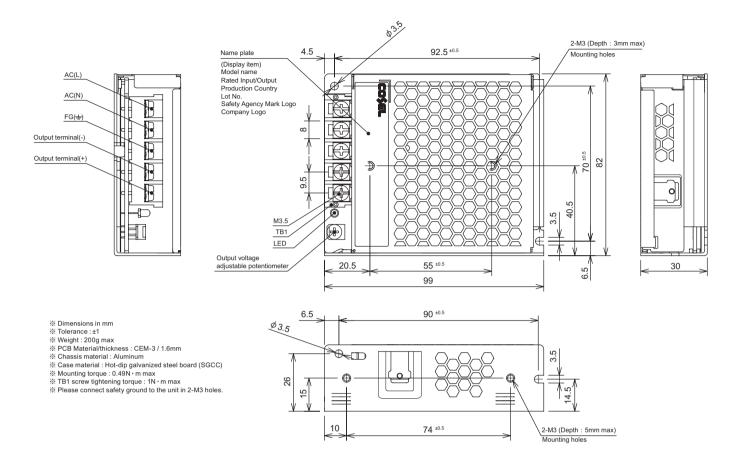

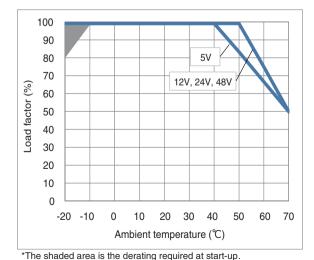



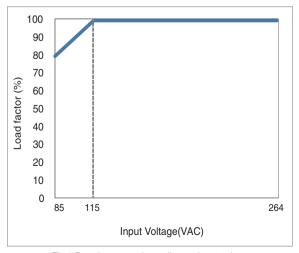


Fig.2 Derating curve depending on input voltage

[■]The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

75 F -

WMA

CAN'US D A CE CA





- Series name
 Single output
 Output wattage
- 4)Universal input
- ⑤Output voltage


- (a) Output voltage
 (b) Optional: *6
 (c) With Coating
 (c) Low leakage current
 (d): VH(J.S.T.)connector type
- J4: EP(Tyco)connector type
- T1: Horizontal terminal block
- *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	WMA75F-12	WMA75F-24	WMA75F-48
MAX OUTPUT WATTAGE[W]	72	76.8	76.8
DC OUTPUT	12V 6A	24V 3.2A	48V 1.6A

		WMA75F-12	WMA75F-24	WMA75F-48				
V]		AC85 - 264 1Φ						
	ACIN 115V	1.4						
CURRENT[A] ACIN 230\		0.8						
CY[Hz]		50/60 (47-63)						
MF0/3	ACIN 115V		88typ					
Y[%]	ACIN 230V	86typ	89typ	90typ				
	ACIN 115V	20typ Ta=25℃ (at cold start)	'	<u>'</u>				
RRENI[A]	ACIN 230V	40typ Ta=25°C (at cold start)						
	ACIN 115V	0.3max						
mA]	ACIN 240V	0.5max						
V]		12	24	48				
A]		6	3.2	1.6				
[W]		72	76.8	76.8				
JLATION[r	mV] *1	120max	240max	480max				
ULATION	[mV] *1	120max	240max	480max				
[mVp-p] *2	lo=100%	150max (Bandwidth 20MHz)						
EGULATION[mV]] 0~+50 ℃	180max	360max	720max				
TIME[me]	ACIN 115V	100tup						
ACIN ACIN		Тоотур						
HOLD-UP TIMF[ms] ———		15typ						
		71						
GE ADJUSTME	NT RANGE[V]	10.8 to 13.2	21.6 to 26.4	43.2 to 52.8				
TAGE SET	TING[V]	11.75 to 12.25	23.5 to 24.5	47.0 to 49.0				
NT PROTE	CTION [A]	Works over 105% of rating and recovers automatically						
GE PROTE	CTION[V]	13.8 to 16.8	27.6 to 33.6	55.2 to 67.2				
G INDICA	TION	LED (Green)						
PUT				<u>.</u> '				
		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP						
G		AC500V 1minute, Cutoff current = 100mA, DC500V 50M Ω min (At Room Temperature)						
	JMID.	-20 to +75°C, 20-90%RH (Non condensing)						
1		10-55Hz, 19.6m/s² (2G) , 3minutes period, 60minutes each along X, Y and Z axis						
		196.1m/s² (20G) , 11ms, once each X, Y and Z axis						
PPROVAL	LS	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, ANSI/AAMI ES60601-1, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1), EN60601-1 3rd, EN61558-2-16 (OVC III), Complies with IEC60601-1-2 4th Ed.						
SON		Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B						
JNITY		Complies with EN61000-4-2, 3, 4, 5,	6, 8, 11					
CATTENU	JATOR*4							
/WEIGHT		30×97×99mm (W×H×D) / 250g ma	ax					
METHOD		Convection						
Υ	*5	5 years (subject to the operating con	ditions)					
	- TO	S years (subject to the operating con	unions)					
	A) A) A) CY[Hz] Y[%] RRENT[A] MA] V] A) W] LATION[n ULATION[mV TIME[ms] CHAPTON CHAPTON	ACIN 115V ACIN 230V EY[Hz] Y[%] ACIN 115V ACIN 230V ACIN 230V ACIN 230V ACIN 230V ACIN 230V ACIN 230V ACIN 240V Y] AJ W] LATION[mV] *1 [mVp-p] *2 lo=100% [GULATION[mV] O-+50°C TIME[ms] ACIN 115V ACIN 230V ACIN 230V ACIN 230V ACIN 120V ACIN 230V ACIN 120V ACIN 230V ACIN 230V ACIN 120V ACIN 230V ACIN 120V ACIN 230V ACIN 120V ACIN 230V ACIN 230V ACIN 230V ACIN 250V	ACIN 115V 1.4	ACIN 115V 1.4 ACIN 230V 0.8 50/60 (47-63) ACIN 115V 84typ 87typ ACIN 230V 86typ 89typ ACIN 230V 40typ Ta=25°C (at cold start) ACIN 115V 20typ Ta=25°C (at cold start) ACIN 230V 40typ Ta=25°C (at cold start) ACIN 230V 40typ Ta=25°C (at cold start) ACIN 240V 0.5max VI				

- *1 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at low (Io=0~20%Atyp) load.
- This is the result of measurement of the testing board with capacitors of $47\mu\,F$ and $0.1\mu\,F$ placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.
- When the load factor is low (lo=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

 *3 Output power derating is required. Refer to "Derating"
- Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
- *5 Consult us about details.
- The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.
 - All parameters not specially mentioned are measured at ACIN 230V, rated load and 25 $^{\circ}\mathrm{C}$ of ambient temperature.
- Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged. Parallel operation is not possible with this model.
- Acoustic noise may be heard from the power supply when used for pulse load.

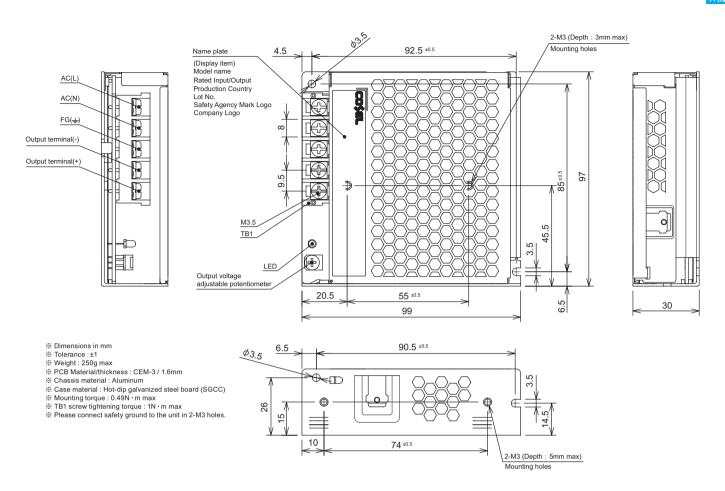

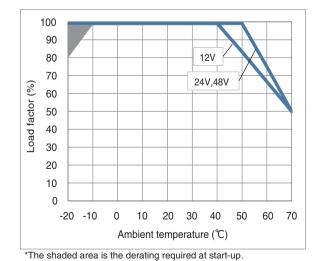


Fig.1 Derating curve depending on ambient temperature

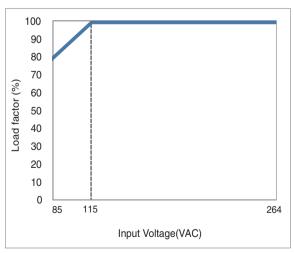


Fig.2 Derating curve depending on input voltage

[■]The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

100 F -

WMA

CAN'US D A CE CA



RoHS



- Series name
 Single output
 Output wattage
- 4)Universal input
- ⑤Output voltage


- (a) Output voltage
 (b) Optional: *6
 (c) With Coating
 (c) Low leakage current
 (d): VH(J.S.T.)connector type
- J4: EP(Tyco)connector type
- T1: Horizontal terminal block
- *Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	WMA100F-12	WMA100F-24	WMA100F-48
MAX OUTPUT WATTAGE[W]	100.8	103.2	100.8
DC OUTPUT	12V 8.4A	24V 4.3A	48V 2.1A

			WMA100F-12	WMA100F-24	WMA100F-48			
	VOLTAGE[V]		AC85 - 264 1Φ	•	·			
	OUDDENETAL	ACIN 115V	2.0					
	CURRENT[A]	ACIN 230V	1.2					
	FREQUENCY[Hz]		50/60 (47-63)					
	EEEIOJENOVIO/1	ACIN 115V	84typ	88typ				
INPUT	EFFICIENCY[%]	ACIN 230V	87typ	90typ	91typ			
	INDUOLI OLIDDENTIAL	ACIN 115V	40typ Ta=25℃ (at cold start)					
	INRUSH CURRENT[A]	ACIN 230V	60typ Ta=25°C (at cold start)					
	LEAKAGE	ACIN 115V	0.3max					
	CURRENT[mA]	ACIN 240V	0.5max					
	VOLTAGE[V]		12	24	48			
	CURRENT[A]		8.4	4.3	2.1			
	WATTAGE[W]		100.8	103.2	100.8			
	LINE REGULATION[m	NV] *1	120max	240max	480max			
	LOAD REGULATION[mV] *1	120max	240max	480max			
Ľ	RIPPLE NOISE [mVp-p] *2	lo=100%	150max (Bandwidth 20MHz)					
OUTPUT	TEMPERATURE REGULATION[mV]	0~+50 ℃	180max	360max	720max			
	STADT LID TIME[me]	ACIN 115V	100typ					
Ľ	START-UP TIME[ms]	ACIN 230V	Тоотур					
	HOLD-UP TIME[ms]		1 - 21					
Ľ	TIOLD-OF TIME[III3]	ACIN 230V	55typ					
Ľ	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.8 to 13.2	21.6 to 26.4	43.2 to 52.8			
	OUTPUT VOLTAGE SETT	ING[V]	11.75 to 12.25 23.5 to 24.5		47.0 to 49.0			
PROTECTION	OVERCURRENT PROTEC	TION [A]	Works over 105% of rating and recovers automatically					
	OVERVOLTAGE PROTE	CTION[V]	13.8 to 16.8	27.6 to 33.6	55.2 to 67.2			
OTHERS	OPERATING INDICAT	ION	LED (Green)					
L	INPUT-OUTPUT		AC4,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 2MOPP					
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) 1MOPP					
	OUTPUT-FG		AC500V 1minute, Cutoff current = 100mA, DC500V 50M Ω min (At Room Temperature)					
L'	OPERATING TEMP.,H	UMID. *3	-20 to +70°C, 20-90%RH (Non conden-	sing)				
FNVIRONMENT ⊢	STORAGE TEMP.,HU	MID.	-20 to +75°C, 20-90%RH (Non condensing)					
	VIBRATION		10-55Hz, 19.6m/s² (2G) , 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis					
	AGENCY APPROVAL	s	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, ANSI/AAMI ES60601-1, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1), EN60601-1 3rd, EN61558-2-16 (OVC III), Complies with IEC60601-1-2 4th Ed.					
SAFETY AND	EMC EMISSON		Complies with CISPR11-B, CISPR32-B, EN55011-B, EN55032-B, FCC Part 15-B, FCC Part 18-B					
EMC	EMC EMMUNITY		Complies with EN61000-4-2, 3, 4, 5, 6, 8, 11					
	HARMONIC ATTENU	ATOR*4						
OTHERS	CASE SIZE/WEIGHT		30×97×129mm (W×H×D) / 300g ma	x				
JINERO -	COOLING METHOD		Convection					
	COOLING WETTIOD							

- *1 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at low (Io=0~20%Atyp) load.
- This is the result of measurement of the testing board with capacitors of $47\mu\,F$ and $0.1\mu\,F$ placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise $\,$ meter equivalent to Keisoku-GikenRM104.
- When the load factor is low (lo=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

 *3 Output power derating is required. Refer to "Derating"
- Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
- *5 Consult us about details.
- The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.
 - All parameters not specially mentioned are measured at ACIN 230V, rated load and 25 $^{\circ}\mathrm{C}$ of ambient temperature.
- Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged. Parallel operation is not possible with this model.
- Acoustic noise may be heard from the power supply when used for pulse load.

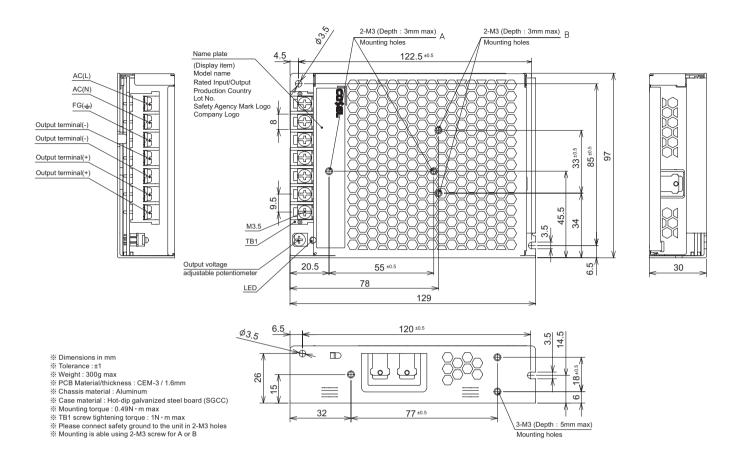

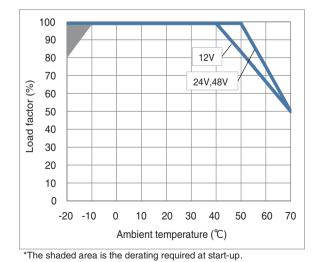


Fig.1 Derating curve depending on ambient temperature

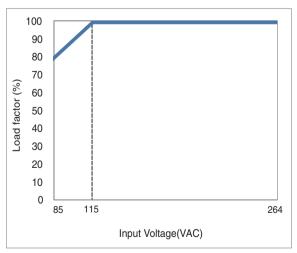


Fig.2 Derating curve depending on input voltage


[■]The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

WMA150H

150 H -

WMA

CRUS D A CE CA **RoHS**



- Series name
 Single output
 Output wattage
- (4) Input voltage selectable
- by switch
- ⑤ Output voltage

- ®Optional: *5
 C: With Coating
 G: Low leakage current
 - T1 : Horizontal terminal block

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	WMA150H-12	WMA150H-24	WMA150H-48
MAX OUTPUT WATTAGE[W]	150	156	158.4
DC OUTPUT	12V 12.5A	24V 6.5A	48V 3.3A

	MODEL		WMA150H-12	WMA150H-24	WMA150H-48		
	VOLTAGE[V]		AC85 - 132 1Φ/AC170 - 264 1Φ (Selec	ctable by switch)	•		
	CUDDENTIAL	ACIN 115V	3.0				
	CURRENT[A] ACIN 230V		1.7				
	FREQUENCY[Hz]		50/60 (47-63)				
INDUIT	EFFICIENOVIO/1	ACIN 115V	85typ	89typ	90typ		
INPUT	EFFICIENCY[%]	ACIN 230V	86typ	90typ	91typ		
	INDUOLI OUDDENTIAL	ACIN 115V	40typ Ta=25℃ (at cold start)				
	INRUSH CURRENT[A]	ACIN 230V	40typ Ta=25℃ (at cold start)				
	LEAKAGE	ACIN 115V	0.3max				
	CURRENT[mA]	ACIN 240V	0.5max				
	VOLTAGE[V]		12	24	48		
	CURRENT[A]		12.5	6.5	3.3		
	WATTAGE[W]		150	156	158.4		
	LINE REGULATION[n	nV] *1	120max	240max	480max		
	LOAD REGULATION[mV] *1	120max	240max	480max		
	RIPPLE NOISE [mVp-p] *2	lo=100%	150max (Bandwidth 20MHz)				
OUTPUT	TEMPERATURE REGULATION[mV]		180max	360max	720max		
-	START-UP TIME[ms]	ACIN 115V ACIN 230V	500typ				
		ACIN 115V	35tvp				
	HOLD-UP TIME[ms]	ACIN 230V					
	OUTPUT VOLTAGE ADJUSTMEN			21.6 to 26.4	43.2 to 52.8		
	OUTPUT VOLTAGE SETT	ING[V]	11.75 to 12.25	23.5 to 24.5	47.0 to 49.0		
PROTECTION	OVERCURRENT PROTEC	TION [A]	Works over 105% of rating and recove	rs automatically			
CIRCUIT AND	OVERVOLTAGE PROTE	CTION[V]	13.8 to 16.8	27.6 to 33.6	55.2 to 67.2		
OTHERS	OPERATING INDICAT	TON	LED (Green)				
	INPUT-OUTPUT		AC4,000V 1minute, Cutoff current = 1	0mA, DC500V 50MΩ min (At Room Te	mperature) 2MOPP		
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10	DmA, DC500V 50MΩ min (At Room Ter	mperature) 1MOPP		
	OUTPUT-FG		AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At Room Temperature)				
	OPERATING TEMP.,+	IUMID. *3	-20 to +70°C, 20-90%RH (Non condensing)				
ENVIDONMENT	STORAGE TEMP.,HU	MID.	-20 to +75°C, 20-90%RH (Non condensing)				
ENVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis				
	IMPACT		196.1m/s ² (20G), 11ms, once each X,	Y and Z axis			
SAFETY AND	AGENCY APPROVAL	s		CSA-C22.2 No.62368-1), EN62368-1, A 0601-1 3rd, EN61558-2-16 (OVC III), Co	NSI/AAMI ES60601-1, C-UL (equivalent implies with IEC60601-1-2 4th Ed.		
EMC	EMC EMISSON			3, EN55011-B, EN55032-B, FCC Part 15			
	EMC EMMUNITY		Complies with EN61000-4-2, 3, 4, 5, 6	, 8, 11			
OTUES 2	CASE SIZE/WEIGHT		30×97×159mm (W×H×D) / 500g ma	x			
OTHERS	COOLING METHOD		Convection				
WADDANTY	WARRANTY	*4	5 years (subject to the operating condi	itions)			

^{*1} Consult us about dynamic load and input response. Measure the output voltage by using the

- *5 The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.
- All parameters not specially mentioned are measured at ACIN 230V, rated load and 25°C of ambient temperature.
- Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- Parallel operation is not possible with this model. Acoustic noise may be heard from the power supply when used for pulse load.

average mode of the tester to deal with the burst operation at low ($lo=0\sim20\%$ Atyp) load. This is the result of measurement of the testing board with capacitors of 47μ F and 0.1μ F placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.


When the load factor is low (lo=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

*3 Output power derating is required. Refer to "Derating"



External view

WMA

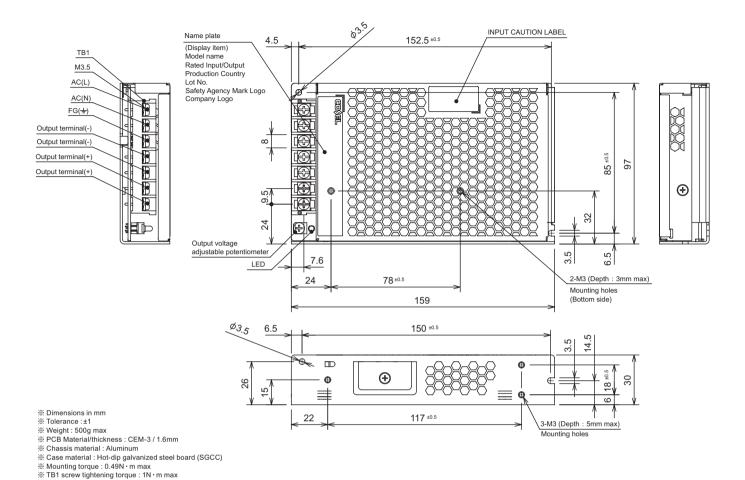

Derating Curve

Please connect safety ground to the unit in 2-M3 holes.

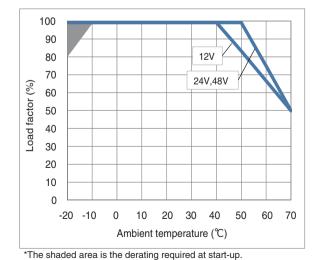


Fig.1 Derating curve depending on ambient temperature

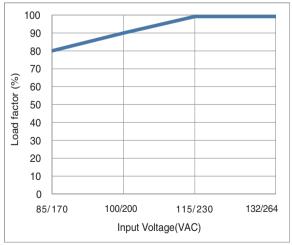


Fig.2 Derating curve depending on input voltage

[■]The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

Ordering information

WMA350H

Н 350

WMA





- Series name
 Single output
 Output wattage

- (4) Input voltage selectable by switch
- ⑤ Output voltage

- ®Optional: *5
 C: With Coating
 G: Low leakage current
 - T1 : Horizontal terminal block

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

MODEL	WMA350H-12	WMA350H-24	WMA350H-36	WMA350H-48	
MAX OUTPUT WATTAGE[W]	348	350.4	349.2	350.4	
DC OUTPUT	12V 29A	24V 14.6A	36V 9.7A	48V 7.3A	

	MODEL		WMA350H-12	WMA350H-24	WMA350H-36	WMA350H-48			
	VOLTAGE[V]		AC85 - 132 1Φ/AC170 - 264	1φ (Selectable by switch)	•	•			
	OUDDENITAL	ACIN 115V	6.0						
	CURRENT[A]	ACIN 230V	3.3						
	FREQUENCY[Hz]		50/60 (47-63)						
INDUT	EEEIOIENOVIO/1	ACIN 115V	85typ	88typ	88typ				
INPUT	EFFICIENCY[%]	ACIN 230V	86typ	88typ	89typ	89typ			
	INDUOLI OLIDDENTIAL	ACIN 115V	60typ Ta=25℃ (at cold start	t)					
	INRUSH CURRENT[A]	ACIN 230V	60typ Ta=25°C (at cold start)						
	LEAKAGE	ACIN 115V	0.3max						
	CURRENT[mA]	ACIN 240V	0.5max						
	VOLTAGE[V]		12	24	36	48			
	CURRENT[A]		29	14.6	9.7	7.3			
	WATTAGE[W]		348	350.4	349.2	350.4			
	LINE REGULATION[n	nV] *1	120max	240max	360max	480max			
	LOAD REGULATION	mV] *1	120max	240max	360max	480max			
	RIPPLE NOISE [mVp-p] *2	lo=100%	150max (Bandwidth 20MHz))					
OUTPUT	TEMPERATURE REGULATION[mV]	0~+50 ℃	180max	360max	540max	720max			
	START-UP TIME[ms]	ACIN 115V ACIN 230V	1300typ						
	HOLD-UP TIME[ms]	ACIN 115V	12typ						
		ACIN 230V							
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		10.8 to 13.2	21.6 to 26.4	32.4 to 39.6	43.2 to 52.8			
	OUTPUT VOLTAGE SETT	TING[V]	11.75 to 12.25	23.5 to 24.5	35.0 to 37.0	47.0 to 49.0			
PROTECTION	OVERCURRENT PROTEC	CTION [A]	Works over 105% of rating and recovers automatically						
CIRCUIT AND	OVERVOLTAGE PROTE	CTION[V]	13.8 to 16.8	27.6 to 33.6	41.4 to 50.4	55.2 to 67.2			
OTHERS	OPERATING INDICAT	TION	LED (Green)						
	INPUT-OUTPUT		AC4,000V 1minute, Cutoff c	urrent = 10mA, DC500V 50	MΩ min (At Room Temperatu	re) 2MOPP			
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOPP						
	OUTPUT-FG		AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At Room Temperature)						
	OPERATING TEMP.,F	IUMID.*3	-20 to +70°C, 20-90%RH (Non condensing)						
ENVIDONMENT	STORAGE TEMP.,HU	MID.	-20 to +75°C, 20-90%RH (Non condensing)						
ENVIRONMENT	VIBRATION		10 - 55Hz, 19.6m/s² (2G) , 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s² (20G), 11ms, one	ce each X, Y and Z axis					
SAFETY AND	AGENCY APPROVAL	.s	UL62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1), EN62368-1, ANSI/AAMI ES60601-1, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1), EN60601-1 3rd, EN61558-2-16 (OVC III), Complies with IEC60601-1-2 4th Ed.						
EMC	EMC EMISSON		Complies with CISPR11-B, C	CISPR32-B, EN55011-B, EN	55032-B, FCC Part 15-B, FCC	Part 18-B			
	EMC EMMUNITY		Complies with EN61000-4-2	2, 3, 4, 5, 6, 8, 11					
OTHERS	CASE SIZE/WEIGHT		115×30×215mm (W×H×D) / 800g max					
OTHERS	COOLING METHOD		Forced cooling (internal fan)						

^{*1} Consult us about dynamic load and input response.

^{*2} This is the result of measurement of the testing board with capacitors of $47\mu F$ and $0.1\mu F$ placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.

^{*3} Output power derating is required. Refer to "Derating"

^{*4} Consult us about details.

^{*5} The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.

All parameters not specially mentioned are measured at ACIN 230V, rated load and 25°C of ambient temperature.

Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.


Parallel operation is not possible with this model.

Acoustic noise may be heard from the power supply when used for pulse load.



External view

WMA

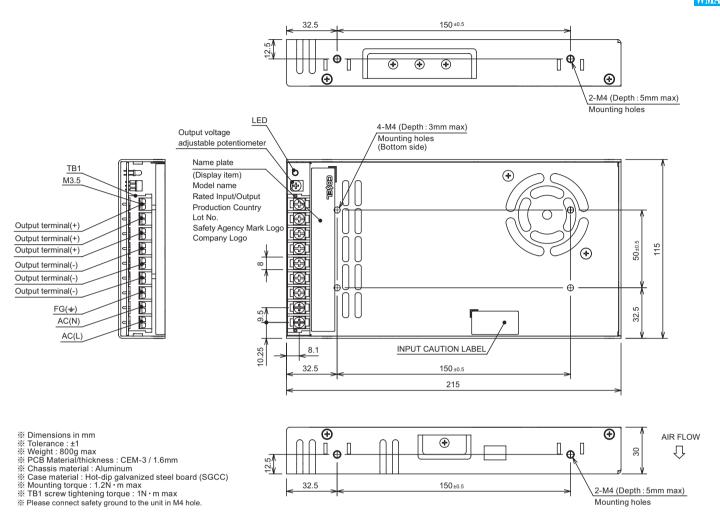

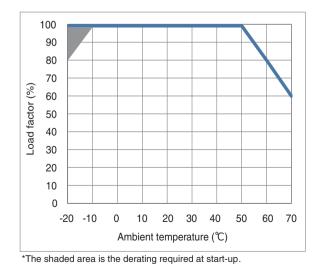


Fig.1 Derating curve depending on ambient temperature

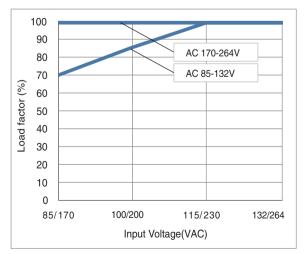


Fig.2 Derating curve depending on input voltage


[■]The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.



WMA


Assembling and Installation Method


■To keep enough isolation between screws and internal components, the length of the mounting screw should not exceed recommendation as shown in the figure.



Model	Mounting screw	Mounting hole	a (Max penetration length)	
WMA35F WMA75F	Bottom M3		3mm max	
WMA100F WMA150H	IVIS	Side	5mm max	
WMA350H	M4	Bottom	3mm max	
	1714	Side	5mm max	

■In order to withstand vibrations and impact, support which is shown in the figure is necessary.

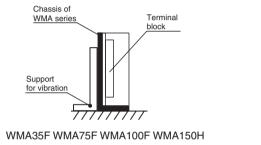



- ■If you use two or more power supplies side by side, please keep a sufficient distance between them to allow enough air ventilation.
- ■Ambient temperature around each power supply should not exceed the temperature range shown in the derating curve.
- ■The unit has cooling fan. (WMA350H)

 Ensure that the inlet and outlet vents are not blocked.

Instruction Manual

■Please read the "Instruction Manual" and "Before using our product" before you use our product.

Instruction Manual https://www.coselasia.com/product/index01#post-10-1337

Before using our product https://en.cosel.co.jp/technical/caution/index.html





Basic Characteristics Data

		Switching Inpu		Input Dated Inrush		Р	D		
Model			current [A] Rated input fuse		current protection circuit	Material	Single sided	Double sided	Parallel operation
WMA35F	Flyback converter	50 to 120	0.7	250V 2.5A	Thermistor	CEM-3	Yes		No
WMA75F	Flyback converter	50 to 120	1.4	250V 3.15A	Thermistor	CEM-3	Yes		No
WMA100F	Flyback converter	50 to 120	2.0	250V 3.15A	Thermistor	CEM-3	Yes		No
WMA150H	Flyback converter	50 to 120	1.7/3.0	250V 6.3A	Thermistor	CEM-3	Yes		No
WMA350H	Forwrad converter	65	3.3/6.0	250V 10A	Thermistor	CEM-3	Yes		No