

### NOTES: UNLESS OTHERWISE SPECIFIED

### 1. MATERIAL:

HOUSING: THERMOPLASTIC; COLOR: SEE CHART END CAP: THERMOPLASTIC; COLOR: BLACK SEALS: SILICONE RUBBER; COLOR: GREEN(REAR SEAL)

2. MODIFICATIONS: END CAP, REDUCED DIAMETER SEAL.

#### 3. SPECIFICATIONS:

- 3.1 CURRENT RATING: SIZE 16, 13 AMPS; SIZE 12, 25 AMPS.
- 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
- 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
- 3.5 MOISTURE RESISTANCE:


IP68(1M OF WATER FOR A PERIOD OF 24 HOURS , MATED CONDITION) IP69K(MATED CONDITION)


- 3.6 MATING CYCLE DURABILITY: 100 CYCLES
- 3.7 RoHS COMPLIANT
- 4. MATING PART: AT16-15SX-\* PLUG ( X = A,B,C,D,E KEYS, \* = ALL MODIFICATIONS )
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

### 6 CONTACT SIZE AND REAR SEAL WIRE RANGE

CONTAC	O.D.	MAX. INSUL	TYPICAL	
SIZE		O.D.	WIRE RANGE	
12	2.46 mm	4.01 mm	10 - 14 AWG	
	(.097 in)	(.158 in)	(3.0-2.0)	
16	1.35 mm	3.05 mm	14 - 20 AWG	
	(.053 in)	(.120 in)	(2.0-0.5)	

REVISIONS									
REV	ECO	DESCRIPTION	DATE	BY	APPR				
A1	-	RELEASE DRAWING	27/JUL/2021	LOUIE	TOMMY				







		SEE	CHART							1 5
		PART N	NUMBER		DESCRIPTION		DESCRIPTION		ПЕМ	۰
(	QUANTITY			MA	<b>TERI</b>	ALS LI	ST			1
- 1 -		WISE SPECIFIED are in metric(mm).	SIGI	NATURE	S DATE	ATE CINE Cyctoma Corporation				1
2	) All dimensions are : ) Tolerances are : I PL DEC ±0.30	sa followa:	DRAWN:	LOUIEYIN	27/JUL/2021	SINE Systems Corporation				
- 1 :	2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1*	CHECKED:	ORION.LI	28/JUL/2021	A Subsidiary of Amphenol Corporation				
	) Note reference	- /x	ENGINEER:			44724 Morley Drive Clinton Township, MI 48036				
Η,	IATERIAL SPECIFICA	TIONS:	APPROVAL:	TOMMY.XIE	29/JUL/2021	0	ion rownship, wii 40000	,		4
"			CUSTOMER:			15 POSITI	ON RECEPTACLE	E, PIN,AT SER	IES	
	ROCESS SPECIFICA	TIONS:	INFORMATIO SPECIFICATI SHOWN HER THE AMPHEN OF REPRODU DIMENSIONS	EON ARE THE NOL CORPORA UCTION ARE IN ARE SUBJECT	SN FEATURES, FORMANCE DATA PROPERTY OF TION. NO RIGHTS IPLIED. ALL	BIZE FSCM NO. DWG NO: AT16-15PX-XXXX A		REVISION		
'	EXT ASS'Y:		MANUFACTU	IRING VARIATIO	ONS.	SCALE: NONE		SHEET 1 OF	3	


REVISIONS								
REV	ECO	DESCRIPTION	DATE	BY	APPR			
A1	-	RELEASE DRAWING	27/JUL/2021	LOUIE	TOMMY			

15 POSITION RECEPTACLE, PIN,AT SERIES

AT16-15PX-XXXX









KEY-A CONFIGURATION						
PART NUMBER	COLOR OF HOUSING					
AT16-15PA-K003	BLACK					
AT16-15PA-EK02	GRAY					

KEY-B CONFIGURATION							
PART NUMBER	COLOR OF HOUSING						
AT16-15PB-K003	BLACK						


KEY-C CONFIGURATION					
PART NUMBER	COLOR OF HOUSING				
AT16-15PC-K003	BLACK				
AT16-15PC-EK02	GREEN				

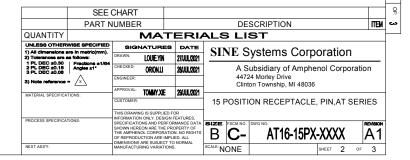

REVISIONS									
REV	ECO	DESCRIPTION	DATE	BY	APPR				
A1	-	RELEASE DRAWING	27/JUL/2021	LOUIE	TOMMY				



KEY-D CONFIGURATION						
PART NUMBER	COLOR OF HOUSING					
AT16-15PD-K003	BLACK					
AT16-15PD-EK02	BROWN					



KEY-E CONFIGURATION					
PART NUMBER	COLOR OF HOUSING				
AT16-15PE-K003	BLACK				
AT16-15PE-EK02	GRAY				

	SEE	CHART						
	PART N	IUMBER		DESCRIPTION		DESCRIPTION		ITEM
QUANTITY			MA	TERI	IALS LIST			
UNLESS OTHER		SIGN	NATURE	S DATE	TE CINE Customes Companytion			
All dimensions a     Tolerances are a	a followa:	DRAWN:	LOUIEYIN	27/JUL/2021	SINE Systems Corporation			
1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	ORION.LI	28/JUL/2021	A Subsidiary of Amphenol Corporation			
3) Note reference	- /x	ENGINEER:			44724 Morley Drive Clinton Township, MI 48036			
MATERIAI SPECIFICA	TIONS:	APPROVAL:	TOMMY.XIE	29/JUL/2021	Cilli	ton Township, wii 40000		
mort Entire or Edit Ion	1040.	CUSTOMER:			15 POSITI	ON RECEPTACLE	, PIN,AT SER	ES
PROCESS SPECIFICA	FIONS:	INFORMATION SPECIFICATION SHOWN HERI THE AMPHEN OF REPRODU	ONS AND PER EON ARE THE IOL CORPORA	GN FEATURES, FORMANCE DATA PROPERTY OF ATION, NO RIGHTS MPLIED, ALL	B C- AT16-15PX-XXXX A1			
NEXT ASS'Y:			RING VARIATI	ONS.	SCALE: NONE		sheet 3 of	3

# **AT Series™** - Contact Size 16 Options

Machined Contacts, Sockets & Pins								
Part Number	Description	Size	AWG	Туре				
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined				
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined				
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined				
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined				
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined				
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined				
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined				
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined				
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined				
AT62-201-1631-22	Female Contact - Socket, Gold-plated	16	22-24	Machined				
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined				
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined				

Tooling - Machined Contacts			
Part	Part Number	Part Number Description	
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)	
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)	

Contact Removal Tools				
Part	Part Part Number Description			
	ATRT-100	Used for removal of contacts for A Series™ products		
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16		
	A114017	Sealing Plug, Size 16, White		

	Stamped & Formed Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре	
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed	
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed	
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed	
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed	
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed	
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed	
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed	
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed	
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed	
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed	
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed	
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed	
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed	
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed	
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed	
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed	

Tooling - Stamped & Formed Contacts			
Part	Part Number Description		
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)	
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)	
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)	
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)	
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)	
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)	
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)	

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

# **ATP Series™** - Contact Size 12 Options

	Machined Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре	
AT60-204-12141-10	Male Contact - Pin, Nickel-plated	12	10-12	Machined	
AT62-203-12141-10	Female Contact - Socket, Nickel-plated	12	10-12	Machined	
AT60-220-1231	Male Contact - Pin, Gold-plated	12	12-14	Machined	
AT62-210-1231	Female Contact - Socket, Gold-plated	12	12-14	Machined	
AT60-204-12141	Male Contact - Pin, Nickel-plated	12	12-14	Machined	
AT62-203-12141	Female Contact - Socket, Nickel-plated	12	12-14	Machined	

DiagnosticGrade™ Machined Contacts, Sockets & Pins • Smaller AWG for Diagnostic Applications • Gold-plated • Increased Mating Cycles • Cost-effective				
Part Number	Description	Size	AWG	Туре
65-54749	Male Contact - DiagnosticGrade™, Pin, Gold-plated	12	20	Machined
AT62-210-1231-1820	Female Contact - DiagnosticGrade™, Socket, Gold-plated	12	20	Machined

Tooling - Machined Contacts			
Part	Part Number	Description	
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)	
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)	

Contact Removal Tools			
Part	Part Number Description		
refer turbs	ATRT-100	Used for removal of contacts for A Series™ products	
	AT11-337-1205	Contact Removal Tool, Plastic, Size 12	
	A114017	Sealing Plug, Size 12, White	

Stamped & Formed Contacts, Sockets & Pins					
Part Number	Description	Size	AWG	Туре	
AT60-12-0244	Male Contact - Pin, Gold-plated	12	10-12	Stamped & Formed	
AT62-12-0244	Female Contact - Socket, Gold-plated	12	10-12	Stamped & Formed	
AT60-12-0222	Male Contact - Pin, Nickel-plated	12	10-12	Stamped & Formed	
AT62-12-0222	Female Contact - Socket, Nickel-plated	12	10-12	Stamped & Formed	
AT60-12-0144	Male Contact - Pin, Gold-plated	12	12-14	Stamped & Formed	
AT62-12-0144	Female Contact - Socket, Gold-plated	12	12-14	Stamped & Formed	
AT60-12-0166	Male Contact - Pin, Nickel-plated	12	12-14	Stamped & Formed	
AT62-12-0166	Female Contact - Socket, Nickel-plated	12	12-14	Stamped & Formed	

Tooling - Stamped & Formed Contacts			
Part	Part Number	Description	
	MFX-3973	Crimp Die - Size 12 (S&F contacts only)	
	MFX-3985	Crimp Die - Size 12 (S&F contacts only) 10-12AWG -02XX Series	
	ATT-12-00	Hand Crimp Tool - Size 12, 12AWG (S&F contacts only)	

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:
AT16-15PE-EK02