

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC; COLOR: SEE CHART END CAP: THERMOPLASTIC; COLOR: BLACK SEALS: SILICONE RUBBER; COLOR: RED (FRONT SEAL), GREEN(REAR SEAL)

- 2. MODIFICATIONS: END CAP, REDUCED DIAMETER SEAL.
- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: SIZE 16, 13 AMPS; SIZE 12, 25 AMPS.
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE:
 - IP68(1M OF WATER FOR A PERIOD OF 24 HOURS , MATED CONDITION) IP69K(MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: AT16-15PX-* RECEPTACLES (X = A,B,C,D,E KEYS; * = MODIFICATIONS AND COLORS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6	CONTACT	SIZE AND	REAR	SEAL	WIRE	RANGE
---	---------	----------	------	------	------	-------


CONTACT	MIN. INSUL	MAX. INSUL	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
12	2.46 mm (.097 in)	4.01 mm (.158 in)	10 - 14 AWG (3.0-2.0)
16	1.35 mm (.053 in)	3.05 mm (.120 in)	14 - 20 AWG (2.0-0.5)

	SEE P/	EE P/N CHART REF: DT16-15SA-		REF: DT16-15SA+	kK003, DT16-15SB-K003, DT16-15SC-K003, DT16-15SD-K003, DT16-15SE-K003			
	PART N	IUMBER	₹ .		DE	SCRIPTION		ПЕМ
QUANTITY MATERIALS LIST								
UNLESS OTHER		SIGN	NATURE	S DATE	SINE Systems Corporation			
All dimensions a Tolerances are a	a followa:	DRAWN:	LOUIEYIN	27/JUL/2021	SINE S	systems Corp	oration	
1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	ORION.LI	28/JUL/2021	A Subsidiary of Amphenol Corporation		n	
3) Note reference :	. /x	ENGINEER:			44724 Morley Drive Clinton Township, MI 48036			
MATERIAL SPECIFICAL	IONS:	APPROVAL:	TOMMY.XIE	29/JUL/2021				
INVIENDE OF CONTOX	iono.	CUSTOMER:			15 POSITION PLUG, SOCKET,AT SERIES		s	
PROCESS SPECIFICAT	TIONS:	SPECIFICATION SHOWN HERE THE AMPHEN OF REPRODU	N ONLY. DESI ONS AND PER EON ARE THE IOL CORPORA ICTION ARE II ARE SUBJEC	DESIGN FEATURES, DEPENDENT DATE PROPERTY OF PROPORTY OF PROPORTY OF PROPAGATION, NO PROMEMBER AT LIBERCY TO MORMAL INSPECT TO MORMAL INSPE		-XXXX	EVISION 41	
NEXTASST:		MANUFACTU	RING VARIATI	IONS.	SCALE: NONE		SHEET 1 OF	3


REVISIONS						
REV ECO DESCRIPTION DATE BY APP				APPR		
A1	•	RELEASE NUMBER	27/JUL/2021	LOUIE	TOMMY	

15 POSITION PLUG, SOCKET,AT SERIES


AT16-15SX-XXXX




KEY-A CONFIGURATION			
PART NUMBER	COLOR OF HOUSING		
AT16-15SA-K003	BLACK		
AT16-15SA-EK02	GRAY		



KEY-B CONFIGURATION				
PART NUMBER	COLOR OF HOUSING			
AT16-15SB-K003	BLACK			




ı	KEY-C CONFIGURATION				
	PART NUMBER	COLOR OF HOUSING			
I	AT16-15SC-K003	BLACK			
	AT16-15SC-EK02	GRAY			

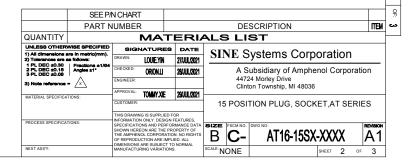


	REVISIONS						
REV ECO DESCRIPTION DATE BY APP				APPR			
A1		RELEASE NUMBER	27/JUL/2021	LOUIE	TOMMY		

15 POSITION PLUG, SOCKET,AT SERIES


AT16-15SX-XXXX



KEY-D CONFIGURATION		
PART NUMBER COLOR OF HOUSING		
AT16-15SD-K003	BLACK	
AT16-15SD-EK02	GRAY	



KEY-E CONFIGURATION		
PART NUMBER	COLOR OF HOUSING	
AT16-15SE-K003	BLACK	
AT16-15SE-EK02	GRAY	

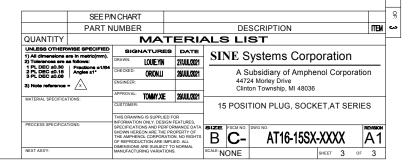

AT Series™ - Contact Size 16 Options

	Machined Contacts, Sockets & Pins					
Part Number	Part Number Description		AWG	Туре		
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined		
AT62-209-1631	Female Contact - Socket, Gold-plated	16	14	Machined		
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined		
AT62-209-16141	Female Contact - Socket, Nickel-plated 16 14 Mach		Machined			
AT60-202-1631	Male Contact - Pin, Gold-plated 16 16-20 Mad		Machined			
AT62-201-1631	Female Contact - Socket, Gold-plated 16 16-20 Mc		Machined			
AT60-202-16141	Male Contact - Pin, Nickel-plated 16 16-20 MacI		Machined			
AT62-201-16141	Female Contact - Socket, Nickel-plated	16	16-20	Machined		
AT60-202-1631-22	Male Contact - Pin, Gold-plated	16	22-24	Machined		
AT62-201-1631-22	Female Contact - Socket, Gold-plated 16 22-24 Mach		Machined			
AT60-202-16141-22	Male Contact - Pin, Nickel-plated	16	22-24	Machined		
AT62-201-16141-22	Female Contact - Socket, Nickel-plated	16	22-24	Machined		

	Tooling - Machined Contacts			
Part	Part Number	Description		
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)		
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)		

Contact Removal Tools		
Part	Part Number	Description
	ATRT-100	Used for removal of contacts for A Series™ products
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16
	A114017	Sealing Plug, Size 16, White

Stamped & Formed Contacts, Sockets & Pins					
Part Number	Description	Size	AWG	Туре	
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed	
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed	
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed	
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed	
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed	
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed	
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed	
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed	
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed	
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed	
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed	
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed	
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed	
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed	
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed	
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed	

Tooling - Stamped & Formed Contacts			
Part	Part Number	Description	
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)	
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)	
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)	
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)	
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)	
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)	
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)	

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

ATP Series™ - Contact Size 12 Options

	Machined Contacts, Sockets & Pins				
Part Number	Description	Size	AWG	Туре	
AT60-204-12141-10	Male Contact - Pin, Nickel-plated	12	10-12	Machined	
AT62-203-12141-10	Female Contact - Socket, Nickel-plated	12	10-12	Machined	
AT60-220-1231	Male Contact - Pin, Gold-plated	12	12-14	Machined	
AT62-210-1231	Female Contact - Socket, Gold-plated	12	12-14	Machined	
AT60-204-12141	Male Contact - Pin, Nickel-plated	12	12-14	Machined	
AT62-203-12141	Female Contact - Socket, Nickel-plated	12	12-14	Machined	

DiagnosticGrade™ Machined Contacts, Sockets & Pins • Smaller AWG for Diagnostic Applications • Gold-plated • Increased Mating Cycles • Cost-effective				
Part Number	Description	Size	AWG	Туре
65-54749	Male Contact - DiagnosticGrade™, Pin, Gold-plated	12	20	Machined
AT62-210-1231-1820	Female Contact - DiagnosticGrade™, Socket, Gold-plated	12	20	Machined

Tooling - Machined Contacts			
Part	Part Number	Description	
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)	
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)	

Contact Removal Tools			
Part	Part Number	Description	
refer turbs	ATRT-100	Used for removal of contacts for A Series™ products	
	AT11-337-1205	Contact Removal Tool, Plastic, Size 12	
	A114017	Sealing Plug, Size 12, White	

Stamped & Formed Contacts, Sockets & Pins					
Part Number	rt Number Description			Туре	
AT60-12-0244	Male Contact - Pin, Gold-plated	12	10-12	Stamped & Formed	
AT62-12-0244	Female Contact - Socket, Gold-plated	12	10-12	Stamped & Formed	
AT60-12-0222	Male Contact - Pin, Nickel-plated	12	10-12	Stamped & Formed	
AT62-12-0222	Female Contact - Socket, Nickel-plated	12	10-12	Stamped & Formed	
AT60-12-0144	Male Contact - Pin, Gold-plated	12	12-14	Stamped & Formed	
AT62-12-0144	Female Contact - Socket, Gold-plated	12	12-14	Stamped & Formed	
AT60-12-0166	Male Contact - Pin, Nickel-plated	12	12-14	Stamped & Formed	
AT62-12-0166	Female Contact - Socket, Nickel-plated	12	12-14	Stamped & Formed	

Tooling - Stamped & Formed Contacts			
Part	Part Number	Description	
	MFX-3973	Crimp Die - Size 12 (S&F contacts only)	
	MFX-3985	Crimp Die - Size 12 (S&F contacts only) 10-12AWG -02XX Series	
	ATT-12-00	Hand Crimp Tool - Size 12, 12AWG (S&F contacts only)	

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:
AT16-15SC-EK02