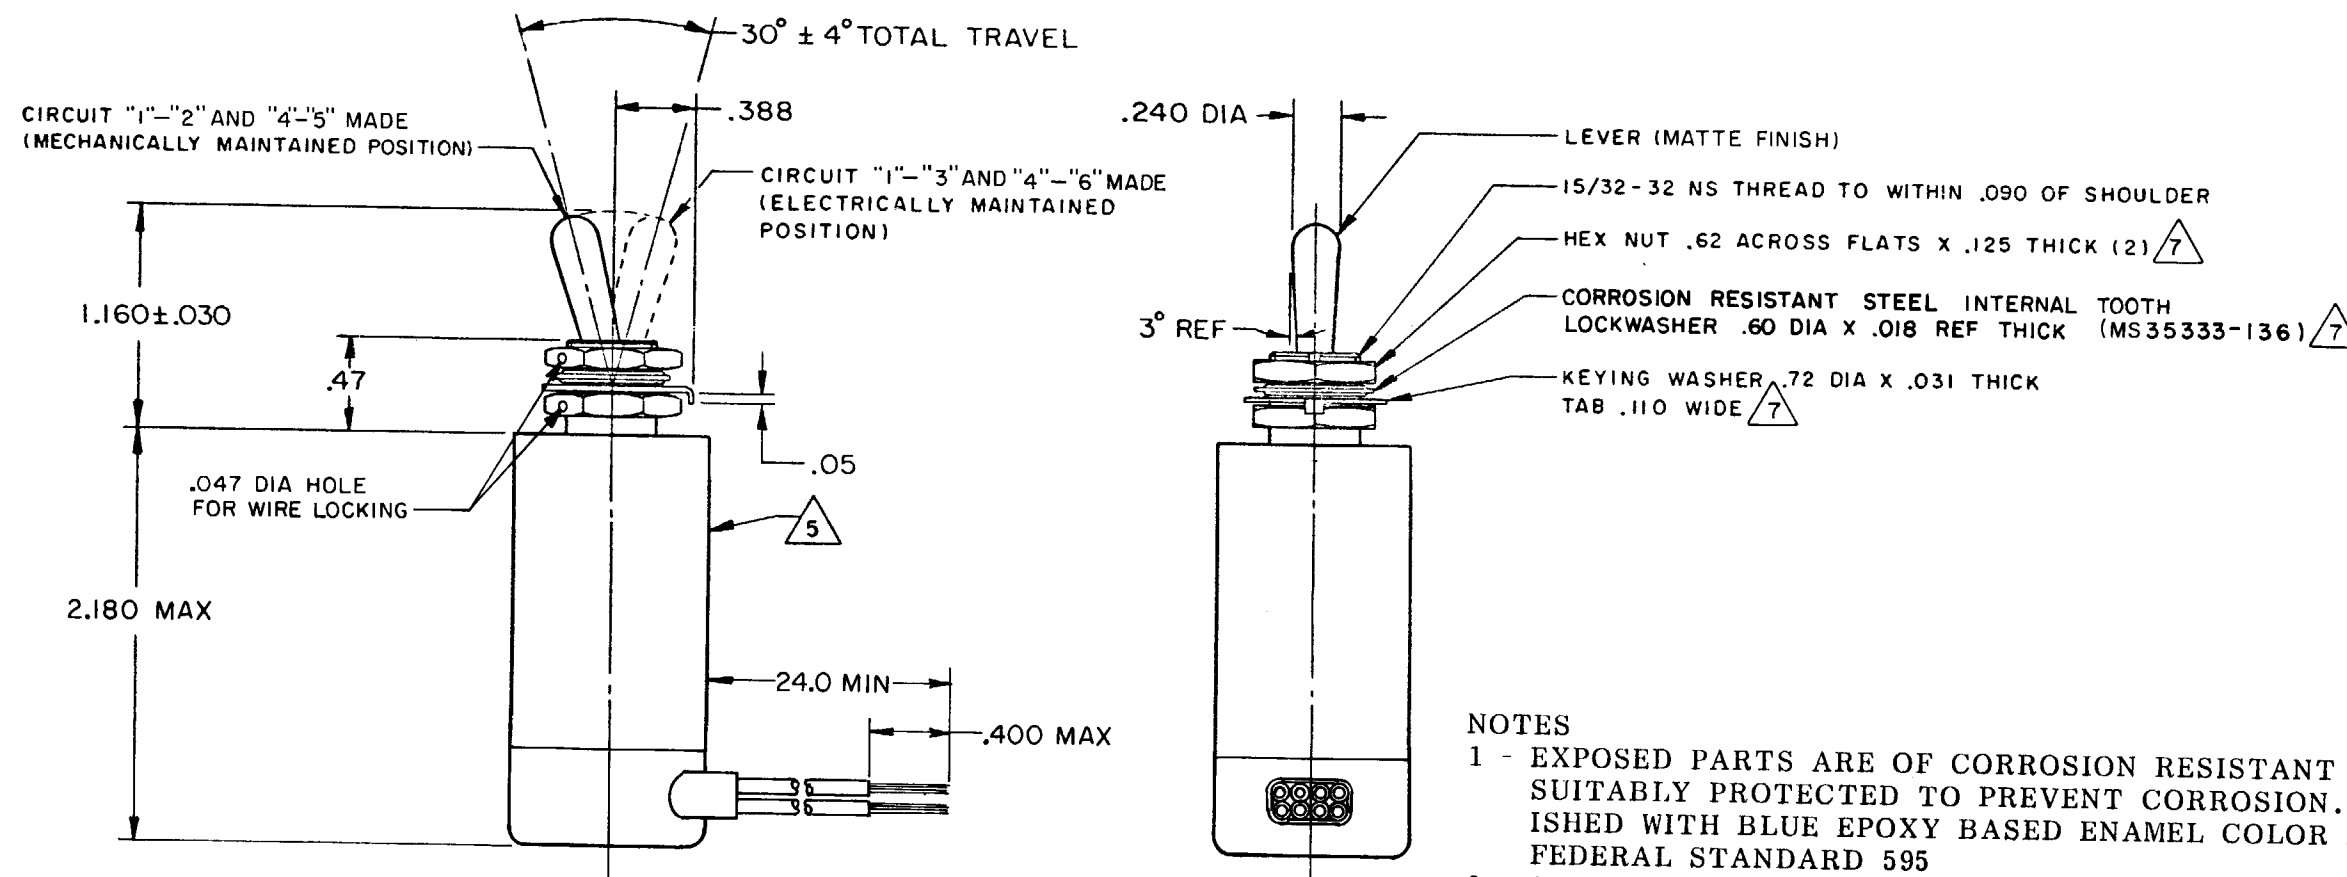
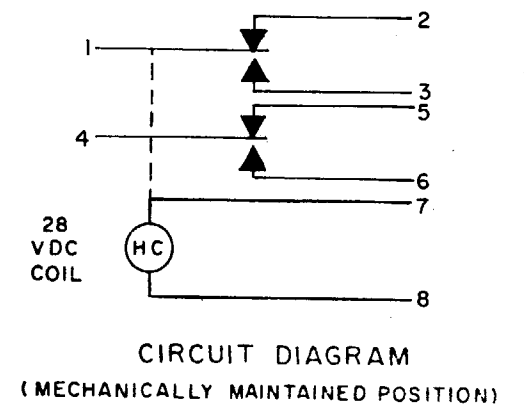
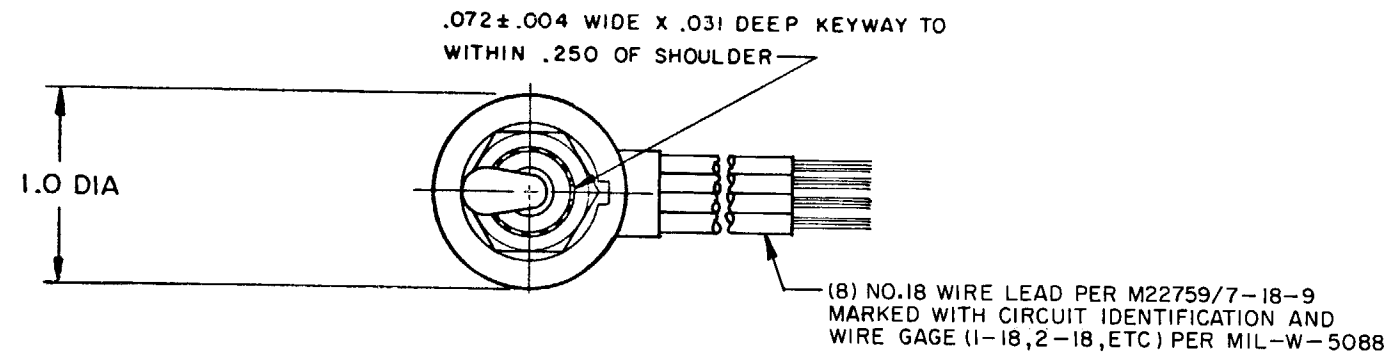


MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FED. MFR. CODE 91929SWITCH - TOGGLE
(MAGNETIC HOLD-IN)CATALOG LISTING
26ET55-2

NOTES

- 1 - EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIAL OR ARE SUITABLY PROTECTED TO PREVENT CORROSION. ENCLOSURE FINISHED WITH BLUE EPOXY BASED ENAMEL COLOR NO. 25184 PER FEDERAL STANDARD 595
- 2 - SWITCH SEALED PER MIL-S-5594
- 3 - HOLD IN VOLTAGE: THE MINIMUM SPECIFIED VOLTAGE AT WHICH THE LEVER WILL REMAIN ACTUATED. HOLD IN MAY OCCUR AT A LOWER VALUE.
DROP OUT VOLTAGE: THE VOLTAGE RANGE IN WHICH THE LEVER WILL BE RELEASED
- 4 - CIRCUITS CAN BE TRANSFERRED MANUALLY. ENERGIZING THE COIL WILL NOT CAUSE TRANSFER OF CIRCUITS
- 5 - CIRCUIT IDENTIFICATION IS SHOWN ON SWITCH
- 6 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 7 - HARDWARE MAYBE FURNISHED UNASSEMBLED PER MIL-S-5594

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS 3

SOLENOID RATING AT 20° C

STEADY STATE LIMITS-----	20-29 VDC
HOLD IN 3-----	15 VDC
DROP OUT 3-----	0-15 VDC
OVERRIDE FORCE AT 29 VDC----	10 LB MAX
OPERATING FORCE-----	7 LB MAX
COIL RESISTANCE-----	220 OHM MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

VOLTAGE

RATING IN AMPERES

SEA LEVEL 65,000 FT

28 VOLTS DC	RES IND		MOTOR		RES IND		MOTOR	
	4	2.5	4		4	2.0	4	

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0)	±.030
TWO PLACE (.00)	±.015
THREE PLACE (.000)	±.005
ANGLES	±

WEIGHT 7.5 OZ MAX

M 26ET55-2

DRAWING
NUMBERISSUE
X 5

REVISIONS

A	CORR - CO 35817
GLH	28 JUL 75
B	CO 50162
WJM	6 OCT 81
D	CO 53401
JAP	17 MAR 84
E	0041615
MBH	14 JUL 08

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[26ET55-2](#)