

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0010894042

Status:


Active

Overview:

C-Grid Connector Products

Description:

2.54mm Pitch C-Grid Breakaway Header, High Profile, Dual Row, Right-Angle, 4 Circuits, 6.10mm Mating Pin Length, 0.38µm Gold (Au) Selective Plating

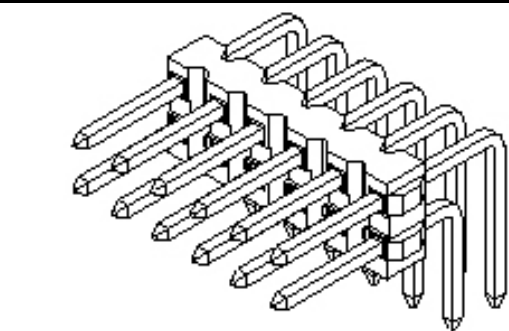

Series image - Reference only

Documents:	
3D Model	Application Specification 713080001-AS-000 (PDF)
Drawing (PDF)	Packaging Specification PK-70873-0353-001 (PDF)
3D Model (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-70216-001 (PDF)	

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	70216
Application	Board-to-Board, Signal, Wire-to-Board
Overview	C-Grid Connector Products
Product Name	C-Grid
UPC	800755017687
Physical	
Breakaway	Yes
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Glow-Wire Capable	No
Lock to Mating Part	None
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.327/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.79mm
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	3.810µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2021)4569-DC (8 July 2021)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
70216 Series

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	70216-0235
--------------------	------------

Reference - Drawing Numbers

Application Specification	713080001-AS-000
Packaging Specification	PK-70873-0353-001
Product Specification	PS-70216-001
Sales Drawing	SD-70216-001-001, SD-70216-001-002

This document was generated on 12/14/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

[10-89-4042](#)